

SCHITA DE PROIECT nr.25-2025

*REPARATIA INTRARII PRINCIPALE IN
EDIFICIUL "GRADINITA MARTISOR", DIN
SATUL BARDAR, R-UL IALOVENI*

*BENEFICIAR: PRIMARIA BARDAR,
RAIONUL IALOVENI*

*EXECUTOR: OK.DESIGN.PRO SRL
Cervinski Octeabrina*


CHISINAU 2025

SITUATIE INITIALA



						Amenajare exterior			
						Reparatia intrarii principale in edificiul "Gradinita Martisor", din sat. Bardar, r-ul Ialoveni			
Mod.	Sect.	Coala	N.doc	Semnata	Data				
						Beneficiar: Primaria Bardar	Etapa	Coala	Coli
							SP	2	15
Director OK.DESIGN.PRO SRL		O. Cervinski				Situatie initiala	ok.design.pro@gmail.com 069027555		

PLAN INTRARE

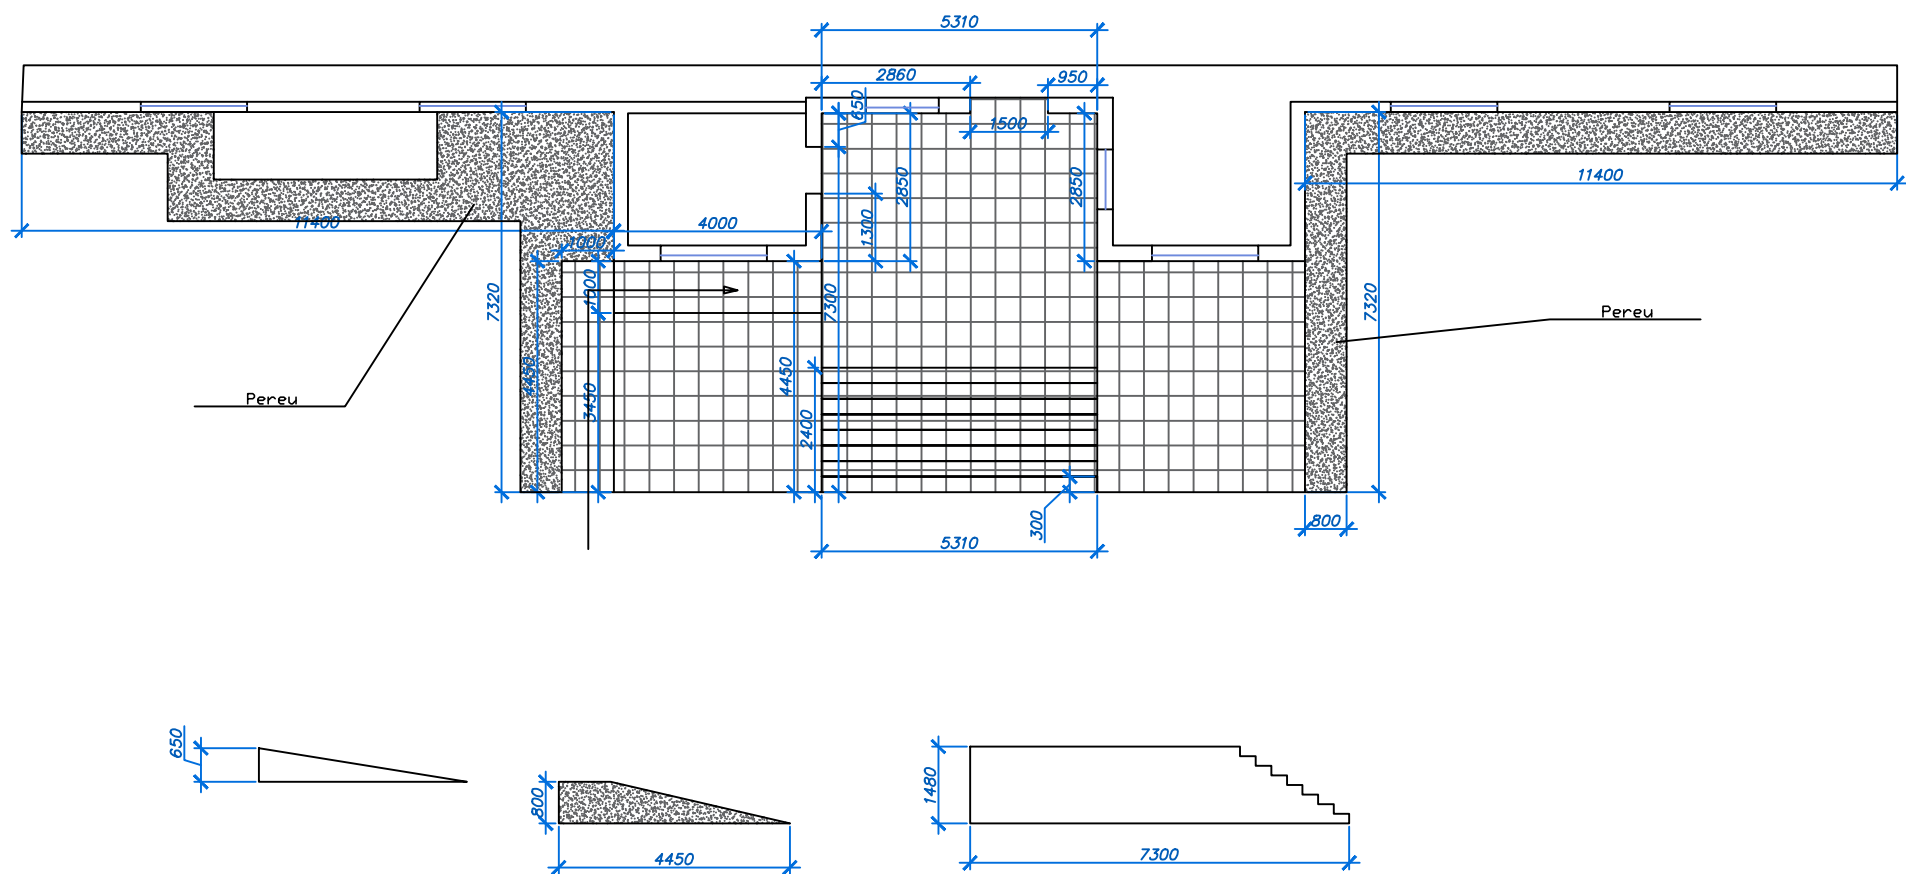


						Amenajare exterior			
						Reparatia intrarii principale in edificiul "Gradinita Martisor", din sat. Bardar, r-ul Ialoveni			
Mod.	Sect.	Coala	N.doc	Semnata	Data				
						Beneficiar: Primaria Bardar	Etapa	Coala	Coli
							SP	3	15
Director OK.DESIGN.PRO SRL	O. Cervinski					Plan intrare	ok.design.pro@gmail.com 069027555		

SPECIFICATIE DEMOLARI									
	Materiale, lucrari						Cantitate		
1	Desfacerea pavajului de pe trepte si prag						57.3 m2		
2	Demontare 20cm beton pe trepe si prag						11.46 m3		
3	Demontare piatra decorativa						30 m2		
4	Demolare beton pentru rampa						1.3 m3		
5	Demontare pereu existent						30 m2		
6	Sapaturi pamant 70 cm sub rampa						3.78 m3		
7	Demontare usa intrare						4.05 m2		
8	Demontare glafuri (0.4m)						10 ml		
9	Demontare teracota interior						7.75 m2		
10	Demontare tencuiala sub teracota						7.75 m2		
11	Curatarea tavanului de var						15.2 m2		
12	Demontare 30 cm pamant in anexe						9.5 m3		
						Amenajare exterior			
						Reparatia intrarii principale in edificiul "Gradinita Martisor", din sat. Bardar, r-ul Ialoveni			
Mod.	Sect.	Coala	N.doc	Semnata	Data				
						Beneficiar: Primaria Bardar	Etapa	Coala	Coli
							SP	4	15
Director OK.DESIGN.PRO SRL	O. Cervinski					Specificatie demolari	ok.design.pro@gmail.com 069027555		

SPECIFICATIE LUCRARI SI MATERIALE- EXTERIOR

	Materiale, lucrari <u>Rampa</u>	Cantitate
1	Strat egalizator 10cm de beton, C 8/10	0.845 m3
2	Plasa de armatura 150x150, ø12	111.2 kg
3	Beton C 16/20	8.5 m3

	Materiale, lucrari <u>Scari si prag</u>	Cantitate
1	Pietris 10 cm fractia 20-30	3.88 m3
2	Plasa de armatura 150x150, Ø12	500 kg
3	Beton C 16/20	7.76 m3

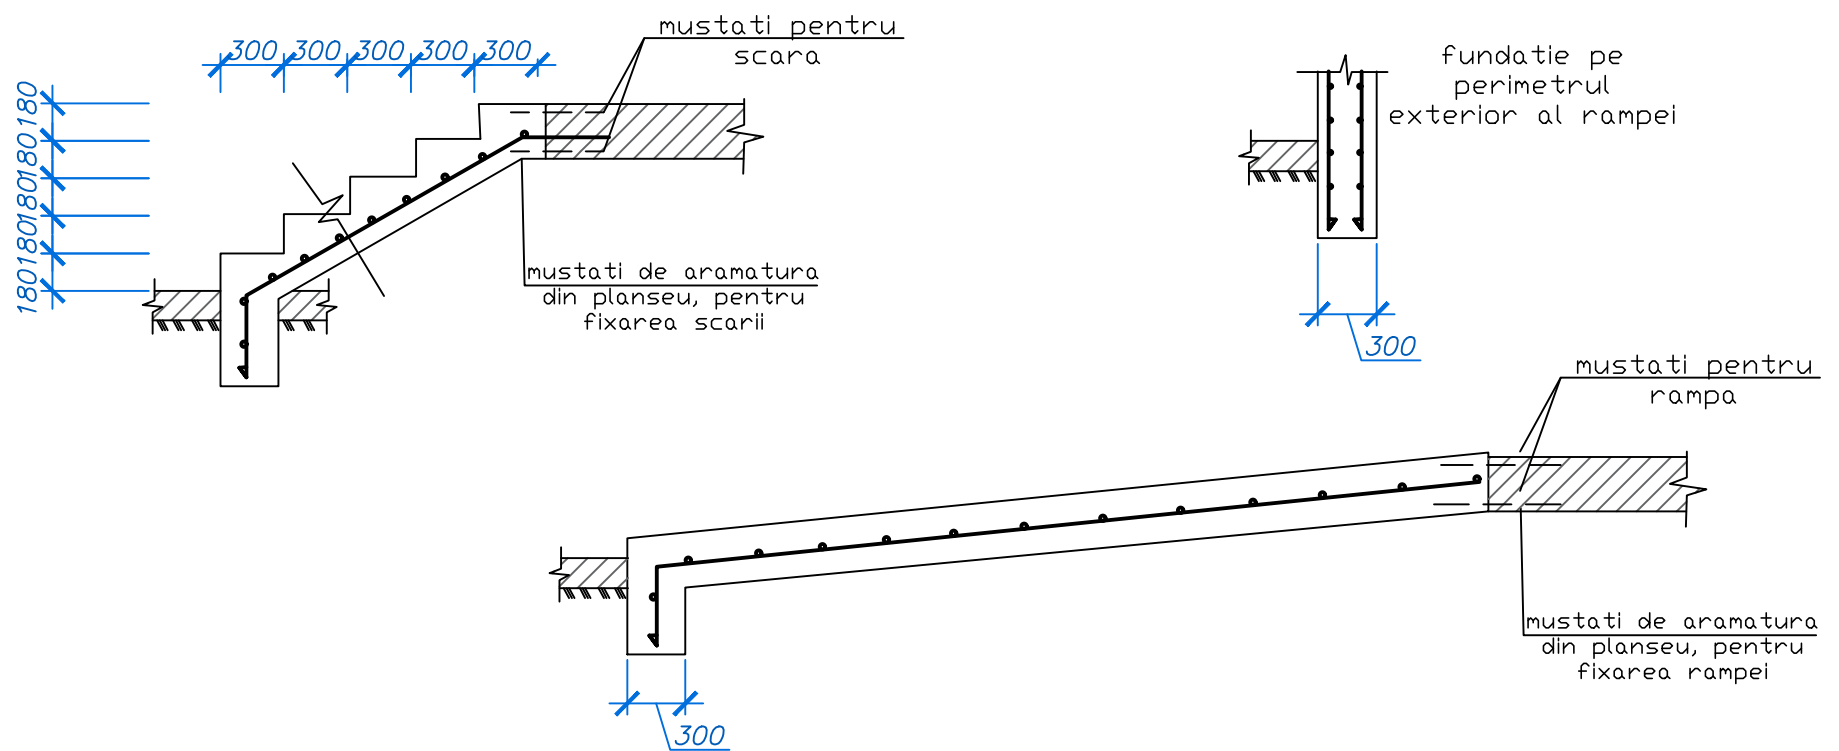


						Amenajare exterior			
						Reparatia intrarii principale in edificiul "Gradinita Martisor", din sat. Bardar, r-ul Ialoveni			
Mod.	Sect.	Coala	N.doc	Semnata	Data				
						Beneficiar: Primaria Bardar	<i>Etapa</i>	<i>Coala</i>	<i>Coli</i>
							<i>SP</i>	<i>5</i>	<i>15</i>
<i>Director</i> <i>OK.DESIGN.PRO</i> <i>SRL</i>		<i>O. Cervinski</i>				Specificatie lucrari si materiale exterior	<i>ok.design.pro@gmail.com</i> <i>069027555</i>		

SPECIFICATIE LUCRARI SI MATERIALE- EXTERIOR									
	Materiale, lucrari <u>Clumbe</u>							Cantitate	
1	Pietris 10 cm fractia 20-30							3.16 m3	
2	Plasa de armatura 150x150, ø4							31.6 m2	
3	Beton C 16/20							2.21 m3	
	Materiale, lucrari <u>Zidarie</u>							Cantitate	
1	Zidarie: caramida Brikston (250x300x238)							1.2 m2	
2	Polisterol extrudat 5 cm							1.2 m2	
3	Plasa cu adeziv							1.2 m2	
4	Piatra decorativa							1.2 m2	
						Amenajare exterior			
						Reparatia intrarii principale in edificiul "Gradinita Martisor", din sat. Bardar, r-ul Ialoveni			
Mod.	Sect.	Coala	N.doc	Semnata	Data				
						Beneficiar: Primaria Bardar	Etapa	Coala	Coli
							SP	6	15
Director OK.DESIGN.PRO SRL		O. Cervinski				Specificatie lucrari si materiale exterior	ok.design.pro@gmail.com 069027555		

SPECIFICATIE LUCRARI SI MATERIALE- EXTERIOR

	Alte lucrari si materiale pe exterior <u>Tamplarie</u>	Cantitate
1	Teava 80x40x3	12 ml
2	Sandwich panel 80mm	4.8 m2
3	Etalbond	4.8 m2
4	Vitraliu aluminiu, cu punte termica	13.7 m2
5	Usa interioara aluminiu	4.2 m2
6	Oracal (litere 5m x h 0.6m)	1 buc
7	Glafuri (0.4m)	10 ml
8	Balustrada inox, pentru persoane cu dezabilitati, h 90cm	5.5 ml
9	Bara inox cu fixare in perete, h 150mm	13 ml
10	Gard decorativ, inox h 0.6m	14.0 m2

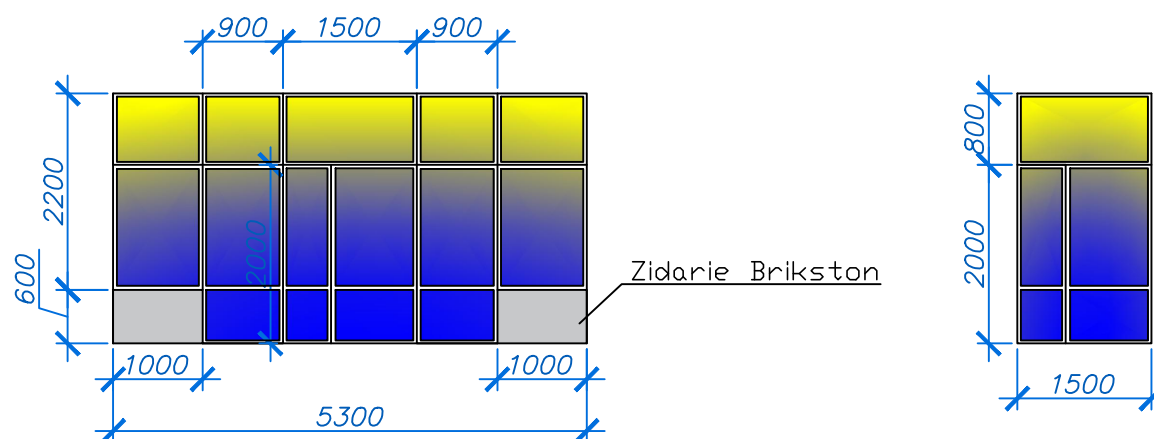

						Amenajare exterior			
						Reparatia intrarii principale in edificiul "Gradinita Martisor", din sat. Bardar, r-ul Ialoveni			
Mod.	Sect.	Coala	N.doc	Semnata	Data				
						Beneficiar: Primaria Bardar	Etapă	Coala	Coli
							SP	7	15
Director OK.DESIGN.PRO SRL		O. Cervinski							
						Specificatie lucrari si materiale exterior	ok.design.pro@gmail.com 069027555		

SPECIFICATIE LUCRARI SI MATERIALE- EXTERIOR									
	Alte lucrari si materiale pe exterior: teracota antiderapanta, grosime 0.9mm						Cantitate		
1	Trepte si prag						31.5 m2		
2	Suprafata rampa						8.45 m2		
3	Pereti rampa						5.6 m2		
4	Suprafata clumbe						31.6 m2		
	Alte lucrari si materiale pe exterior						Cantitate		
1	Gabion 10 cm, ochiul 0.30x0.30						23.66 m2		
2	Piatra, fractia 40-50						2.4 m3		
3	Profil tabla L 18cm						21 ml		
4	Vopsire fatada						42 m2		
						Amenajare exterior			
						Reparatia intrarii principale in edificiul "Gradinita Martisor", din sat. Bardar, r-ul Ialoveni			
Mod.	Sect.	Coala	N.doc	Semnata	Data				
						Beneficiar: Primaria Bardar	Etapa	Coala	Coli
							SP	8	15
Director OK.DESIGN.PRO SRL		O. Cervinski				Specificatie lucrari si materiale exterior	ok.design.pro@gmail.com 069027555		

SPECIFICATIE LUCRARI SI MATERIALE- EXTERIOR									
	Alte lucrari si materiale pe exterior						Cantitate		
1	Pietris pereu						3 m3		
2	Beton pereu C16/20						3 m3		
3	Plasa VR 100x100, ø5						85.25 kg		
	Alte lucrari si materiale pe exterior <u>Electricitate</u>						Cantitate		
1	Cablu vvg 3 x 1.5						10 ml		
2	Tub gofrat ø16						10 ml		
3	Plafon exterior perete						2 buc		
4	Plafon interior						2 buc		
5	Intrerupator dublu						1 buc		
	Alte lucrari si materiale pe exterior						Cantitate		
1	Banca						2 buc		
2	Urna						2 buc		
						Amenajare exterior			
						Reparatia intrarii principale in edificiul "Gradinita Martisor", din sat. Bardar, r-ul Ialoveni			
Mod.	Sect.	Coala	N.doc	Semnata	Data				
						Beneficiar: Primaria Bardar	Etapa	Coala	Coli
							SP	9	15
Director OK.DESIGN.PRO SRL	O. Cervinski						Specificatie lucrari si materiale exterior	ok.design.pro@gmail.com 069027555	

SPECIFICATIE LUCRARI SI MATERIALE- INTERIOR									
	Lucrari si materiale pe Interior						Cantitate		
1	Teracota antiderapanta						15.2 m2		
2	Plinta teracota h 10cm						10 ml		
3	Plasa fibra sticla						7.75 m2		
4	Tencuaiala decorativa tinc						7.75 m2		
5	Tencuiala cu amestec uscat 5mm						7.75 m2		
6	Gipscarton						4.8 m2		
7	Eurofin						4.8 m2		
8	Vopsea de interior						42.8 m2		
						Amenajare exterior			
						Reparatia intrarii principale in edificiul "Gradinita Martisor", din sat. Bardar, r-ul Ialoveni			
Mod.	Sect.	Coala	N.doc	Semnata	Data				
						Beneficiar: Primaria Bardar	Etapa	Coala	Coli
							SP	10	15
Director OK.DESIGN.PRO SRL	O. Cervinski					Specificatie lucrari si materiale interior	ok.design.pro@gmail.com 069027555		

SPECIFICATIE LUCRARI SI MATERIALE- INTERIOR									
	Lucrari si materiale pe Interior- <u>Tavan</u>						Cantitate		
1	Grund cu betonocontact tavan						15.2 m2		
2	Tencuiala cu amestec uscat 10mm						15.2 m2		
3	Plasa fibra sticla						15.2 m2		
4	Tencuiala finis cu Eurofin						15.2 m2		
5	Vopsea de tavan						15.2 m2		

VIZUALIZARI



VIZUALIZARI



VIZUALIZARI



VIZUALIZARI

