



CHEST STAND

With 35x43 Bucky

Product Data

Electrical features

Power supply	230 Vac $\pm 10\%$ single phase
Frequency	50-60 Hz
Rated power	31 VA

Dimensions and weights

Weight	140 kg
Height	2170 mm
Width	625 mm
Depth	535 mm (floor mount), 375 mm (wall mount)

Mechanical features

Vertical bucky movement	Balanced manual, with mechanical lock
Vertical bucky run-length	1500 mm
Film centre to floor distance	400÷1900 mm
Chin support to floor distance	670÷2170 mm

Potter bucky

Cassette size	13x18 cm to 35x43 cm (up to 43x43 cm for portable digital detectors)		
Insertion side	Left or right. Choice at installation		
Cassette centering	Semi-automatic		
AEC measuring chamber	Predisposed for 3-fields chamber		
Skin-film distance	42.5 mm		
Standard Grid (others on request)	Vibrating,	Ratio	10:1
		Focal distance	150c m
		Lines/cm	34

Optional accessories

External cassette holder for gridless exams	Cassette size 35x43, 40x90, 40x120
---	------------------------------------




Environmental conditions

Operating temperature range	+10°C ÷ +40°C
Operating relative humidity range	35% ÷ 75%
Temperature range for transport and storage	-20°C ÷ +70°C
Max. relative humidity for transport and storage	<90 % non condensing
Min. atmospheric pressure for storage and transport	630 hPa

Standards and regulations

CE	CE symbol grants the product compliance to the European Directive for Medical Devices 93/42/EEC and its revised versions
-----------	--

Site Planning (dimensions in mm)

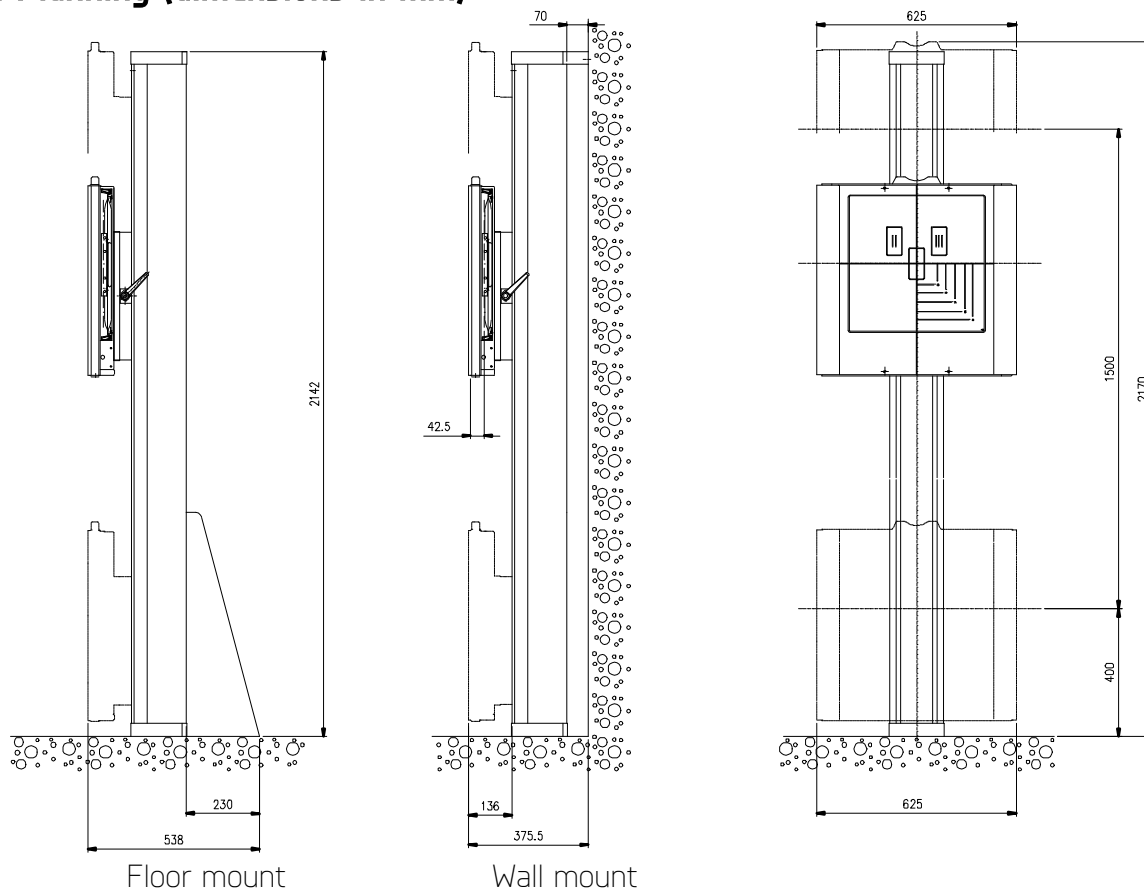

Note: Products are continuously under review in the light of technical advancement. The actual specification may therefore be subject to improvement or modification without notice.

VILLA SISTEMI MEDICALI s.p.a.
 20090 BUCCINASCO (MI) – ITALY,
 Via delle Azalee, 3
 Tel. +39-02-488591, Fax +39-02-4881844

Company with Quality System certified by



ISO 9001:2015



ISO 13485:2016