




1	2	3	4	5	6	7
	931006001 9900	Muncitor necalificat	h-om	5,4500	46,38	303,32
6	33-04- 003-16	Montarea stlpilor din beton armat pentru suspendarea comuna a conductorilor LEA 0,38, 6-10 kV cu adaosuri duble, cu un singur picior	buc			1 039,22
	1	Muncitor	h-om	9,4200	46,38	524,28
	101-0404	Vopsea de ulei neagra	t	0,0004	56 450,00	24,19
	160402	Masini de foraj-macara pe automobil, adincime de foraj 3,5 m	h-ut.	0,9600	450,00	432,00
	400001	Autocamion de bord, tonaj pina la 5 t	h-ut.	0,4700	125,00	58,75
7	p.f.	Stilp din beton SET 9.5-2	buc			1 375,00
	1-1	Stilp din beton SET9.5-2	buc	1,0000	1 375,00	1 375,00
8	p.f.	Stilp din beton SET 10.5-5	buc			2 210,00
	1- 2	Stilp din beton SET10.5-5	buc	1,0000	2 210,00	2 210,00
9	33-03- 004-1	Baterea mecanizata a prizelor de pamint verticale LEA si IDD 35-750 kV, la adincimea pina la 5 m	buc			51,92
	1	Muncitor	h-om	0,8100	46,38	45,08
	040202	Agregate de sudura mobile, curent nominal de sudura 250-400 A, cu motor diesel	h-ut.	0,1900	36,00	6,84
10	TsG03A	Defrasarea manuala a suprafetelor	100m2			570,95
	931006001 9900	Muncitor necalificat	h-om	10,2600	46,38	570,95
		2. Lucrari de montare				
11	RpEB13 C	Demontarea conductorilor A-35	m			3,90
	713701001 1520	Electrician in constructii	h-om	0,0700	46,38	3,90
12	RpEB08 C	Montarea conductori A-35	m			9,57
	713701001 1520	Electrician in constructii	h-om	0,1000	46,38	5,57
	031050	Turle telescopice, 25 m	h-ut.	0,0500	80,00	4,00
13	33-04- 014-2 k=0.5	Demontarea corpurilor de iluminat:	buc			102,60
	1	Muncitor	h-om	2,2900	46,38	63,73
	031001	Autohidroascensoare, capacitate de ridicare 12 m	h-ut.	0,8000	80,00	32,00
	400001	Autocamion de bord, tonaj pina la 5 t	h-ut.	0,1100	125,00	6,88
14	08-02-	Demontarea console metalice,	buc			151,44




1	2	3	4	5	6	7
	363-1 k=0.5	speciale, sudate, pe stilpi, pentru corpuri de iluminat, cantitate becuri: 1				
	1	Muncitor	h-om	3,4100	46,38	94,89
	021102	Macara pe sasiu auto la lucrari de montare a utilajului tehnologic (cu exceptia conductelor principale), 10 t	h-ut.	0,0200	210,00	2,10
	031050	Turle telescopice, 25 m	h-ut.	1,3300	80,00	53,20
	400002	Automobile cu bord, tonaj pina la 8 t	h-ut.	0,0200	125,00	1,25
15	08-02- 363-1	Console metalice, speciale, sudate, pe stilpi, pentru corpuri de iluminat, cantitate becuri: 1	buc			306,64
	1	Muncitor	h-om	3,4100	46,38	189,79
	1011977	Suruburi cu piulite si saibe	kg	0,1000	37,50	3,75
	021102	Macara pe sasiu auto la lucrari de montare a utilajului tehnologic (cu exceptia conductelor principale), 10 t	h-ut.	0,0200	210,00	4,20
	031050	Turle telescopice, 25 m	h-ut.	1,3300	80,00	106,40
	400002	Automobile cu bord, tonaj pina la 8 t	h-ut.	0,0200	125,00	2,50
16	33-04- 014-2	Montarea corpurilor de iluminat:	buc			205,20
	1	Muncitor	h-om	2,2900	46,38	127,45
	031001	Autohidroascensoare, capacitate de ridicare 12 m	h-ut.	0,8000	80,00	64,00
	400001	Autocamion de bord, tonaj pina la 5 t	h-ut.	0,1100	125,00	13,75
17	33-04- 017-1	Suspendarea conductorilor electrici izolati autoportanti CIA- 2A cu tensiunea de la 0,4 kV	1000 m			5 199,49
	1	Muncitor	h-om	55,2400	46,38	3 074,44
	341052000 6739	Macara pe pneuri pentru executarea lucrarilor de alt gen din constructie 10 t	h-ut.	0,8200	210,00	172,20
	031002	Autohidroascensor	h-ut.	24,4100	80,00	1 952,85
18	08-02- 148-1	Cablu pina la 35 kV in tevi, blocuri si cutii pozate, masa 1 m pina la: 1 kg AVVG 3*2.5	100 m			821,65
	1	Muncitor	h-om	12,4000	46,38	690,16
	5009500	Fise de marcare	100 buc	0,0041	150,00	0,73
	021102	Macara pe sasiu auto la lucrari de montare a utilajului tehnologic (cu exceptia conductelor principale), 10 t	h-ut.	0,3900	210,00	81,97
	400002	Automobile cu bord, tonaj pina la 8 t	h-ut.	0,3900	125,00	48,79
19	08-02- 148-1	Cablu pina la 35 kV in tub gofrat, blocuri si cutii pozate, masa 1 m pina la: 1 kg AVVG 3*2.5	100 m			821,00
	1	Muncitor	h-om	12,4000	46,38	690,07
	5009500	Fise de marcare	100 buc	0,0041	150,00	0,54
	021102	Macara pe sasiu auto la lucrari de	h-ut.	0,3900	210,00	81,75




1	2	3	4	5	6	7
		montare a utilajului tehnologic (cu exceptia conductelor principale), 10 t				
	400002	Automobile cu bord, tonaj pina la 8 t	h-ut.	0,3900	125,00	48,64
20	08-03-573-4	Dulap (pupitru) metalic	buc			188,64
	1	Muncitor	h-om	2,3700	46,38	131,91
	1011924	Electrozi 342A, diametru 4 mm	kg	0,1000	39,75	3,98
	1011977	Suruburi cu piulite si saibe	kg	0,1000	37,50	3,75
	021102	Macara pe sasiu auto la lucrari de montare a utilajului tehnologic (cu exceptia conductelor principale), 10 t	h-ut.	0,0700	210,00	14,70
	040502	Instalatii pentru sudare manuala cu arc electric (de curent continuu)	h-ut.	0,7100	36,00	25,56
	400002	Automobile cu bord, tonaj pina la 8 t	h-ut.	0,0700	125,00	8,75
21	08-03-529-1	Contactor de curent continuu pe constructii, curent pina la 160 A	buc			213,49
	1	Muncitor	h-om	3,4200	46,38	190,34
	1011977	Suruburi cu piulite si saibe	kg	0,3680	37,50	13,80
	5009500	Fise de marcare	100 buc	0,0200	150,00	3,00
	5440089	Banda izolatoare	kg	0,0460	87,00	4,00
	021102	Macara pe sasiu auto la lucrari de montare a utilajului tehnologic (cu exceptia conductelor principale), 10 t	h-ut.	0,0070	210,00	1,47
	330206	Masini de gaurit electrice	h-ut.	0,1200	0,00	0,00
	400002	Automobile cu bord, tonaj pina la 8 t	h-ut.	0,0070	125,00	0,88
22	08-03-526-1	Automat mono-, bi-, tripolar, montat pe constructii pe perete sau coloana, curent pina la 25 A	buc			93,37
	1	Muncitor	h-om	1,5600	46,38	86,82
	1011977	Suruburi cu piulite si saibe	kg	0,0490	37,50	1,84
	5009500	Fise de marcare	100 buc	0,0200	150,00	3,00
	5440089	Banda izolatoare	kg	0,0120	87,00	1,04
	021102	Macara pe sasiu auto la lucrari de montare a utilajului tehnologic (cu exceptia conductelor principale), 10 t	h-ut.	0,0020	210,00	0,42
	330206	Masini de gaurit electrice	h-ut.	0,0400	0,00	0,00
	400002	Automobile cu bord, tonaj pina la 8 t	h-ut.	0,0020	125,00	0,25
23	08-03-525-2	Montare separator de sarcina	buc			182,60
	1	Muncitor	h-om	2,8100	46,38	156,40
	1011977	Suruburi cu piulite si saibe	kg	0,4550	37,50	17,06
	5009500	Fise de marcare	100 buc	0,0200	150,00	3,00
	5440089	Banda izolatoare	kg	0,0360	87,00	3,13
	021102	Macara pe sasiu auto la lucrari de montare a utilajului tehnologic (cu exceptia conductelor principale), 10 t	h-ut.	0,0090	210,00	1,89
	330206	Masini de gaurit electrice	h-ut.	0,0400	0,00	0,00
	400002	Automobile cu bord, tonaj pina la 8 t	h-ut.	0,0090	125,00	1,13
24	10-08-017-01	Ceasornice electrice secundare unilaterale de strada:	buc			86,82




1	2	3	4	5	6	7
	1	Muncitor	h-om	1,5600	46,38	86,82
25	08-03-525-2	Montare celule fotoelectrica	buc			180,70
	1	Muncitor	h-om	2,8100	46,38	156,39
	1011977	Suruburi cu piulite si saibe	kg	0,4550	37,50	17,06
	5009500	Fise de marcare	100 buc	0,0200	150,00	3,00
	5440089	Banda izolatoare	kg	0,0360	87,00	3,13
	330206	Masini de gaurit electrice	h-ut.	0,0400	0,00	0,00
	400002	Automobile cu bord, tonaj pina la 8 t	h-ut.	0,0090	125,00	1,12
26	08-01-015-10	Descarcator OPIIC1- B	set			278,19
	1	Muncitor	h-om	4,1000	46,38	228,19
	400002	Automobile cu bord, tonaj pina la 8 t	h-ut.	0,4000	125,00	50,00
27	08-02-411-2	Montare tub gofrat d.50 pe constructii	100 m			2 533,75
	1	Muncitor	h-om	35,8000	46,38	1 992,50
	5009031	Scoabe	10 buc	20,0000	25,00	500,00
	331451	Perforatoare electrice	h-ut.	4,6400	0,00	0,00
	400002	Automobile cu bord, tonaj pina la 8 t	h-ut.	0,3300	125,00	41,25
28	08-02-148-1	Cablu pina la 35 kV in tub gofrat, blocuri si cutii pozate, masa 1 m pina la: 1 kg AVVG 2*25	100 m			739,65
	1	Muncitor	h-om	12,4000	46,38	690,24
	5009500	Fise de marcare	100 buc	0,0041	150,00	0,88
	400002	Automobile cu bord, tonaj pina la 8 t	h-ut.	0,3900	125,00	48,53
29	08-02-148-1	Pozare cablu SIP-2 35mm2 in tub gofrat d.50	100 m			739,67
	1	Muncitor	h-om	12,4000	46,38	689,67
	5009500	Fise de marcare	100 buc	0,0041	150,00	0,00
	400002	Automobile cu bord, tonaj pina la 8 t	h-ut.	0,3900	125,00	50,00
30	08-03-525-2	Montare siguranta fusibila	buc			107,99
	1	Muncitor	h-om	1,8100	46,38	100,74
	5009500	Fise de marcare	100 buc	0,0200	150,00	3,00
	5440089	Banda izolatoare	kg	0,0360	87,00	3,13
	330206	Masini de gaurit electrice	h-ut.	0,0400	0,00	0,00
	400002	Automobile cu bord, tonaj pina la 8 t	h-ut.	0,0090	125,00	1,13
31	08-02-317-4	Releu de tensiune	buc			69,29
	1	Muncitor	h-om	1,2000	46,38	66,79
	400002	Automobile cu bord, tonaj pina la 8 t	h-ut.	0,0200	125,00	2,50
32	08-01-087-3	Constructii metalice sub utilaj	t			23 283,48
	1	Muncitor	h-om	52,2000	46,38	2 405,32
	1011924	Electrozi 342A, diametru 4 mm	kg	4,2000	39,75	166,92




1	2	3	4	5	6	7
	2019408	Constructii din otel individuale, grilaje sudate, masa pina la 0,1 t	t	1,0000	19 450,00	19 450,00
	040502	Instalatii pentru sudare manuala cu arc electric (de curent continuu)	h-ut.	15,1000	36,00	543,58
	400002	Automobile cu bord, tonaj pina la 8 t	h-ut.	1,7400	125,00	217,66
33	08-02-305-4	Traversa pe stilp	buc			38,35
	1	Muncitor	h-om	0,4100	46,38	22,82
	021102	Macara pe sasiu auto la lucrari de montare a utilajului tehnologic (cu exceptia conductelor principale), 10 t	h-ut.	0,0010	210,00	0,21
	031050	Turle telescopice, 25 m	h-ut.	0,1900	80,00	15,20
	400002	Automobile cu bord, tonaj pina la 8 t	h-ut.	0,0010	125,00	0,13
34	08-01-053-1	Izolztori	buc			84,46
	1	Muncitor	h-om	1,4300	46,38	79,59
	400002	Automobile cu bord, tonaj pina la 8 t	h-ut.	0,0390	125,00	4,88
35	08-02-407-3	Teava din otel pe constructii instalate pe pereti, fixare cu scoabe, diametru pina la 50 mm	100 m			2 015,80
	1	Muncitor	h-om	27,4000	46,38	1 525,00
	1011924	Electrozi Ø42A, diametru 4 mm	kg	1,0500	39,75	42,20
	5009031	Scoabe	10 buc	4,1000	25,00	102,40
	040502	Instalatii pentru sudare manuala cu arc electric (de curent continuu)	h-ut.	6,4200	36,00	231,20
	400002	Automobile cu bord, tonaj pina la 8 t	h-ut.	0,9100	125,00	115,00
36	08-02-407-4	Teava din otel pe constructii instalate pe pereti, fixare cu scoabe, diametru pina la 80 mm	100 m			3 770,44
	1	Muncitor	h-om	57,5000	46,38	3 200,22
	1011924	Electrozi Ø42A, diametru 4 mm	kg	2,0000	39,75	79,44
	5009031	Scoabe	10 buc	3,1000	25,00	77,56
	040502	Instalatii pentru sudare manuala cu arc electric (de curent continuu)	h-ut.	6,4200	36,00	231,22
	400002	Automobile cu bord, tonaj pina la 8 t	h-ut.	1,4500	125,00	182,00
37	p.f.	Consola D42-60mm	buc			100,00
	2-1	Consola D42-60mm	buc	1,0000	100,00	100,00
38	p.f.	Cablu AVVGng 3*2.5	m			3,39
	2-2	Cablu AVVGng 3*2.5	m	1,0000	3,39	3,39
39	p.f.	Cablu AVVGng 2*25	m			14,50
	2-3	Cablu AVVGng 2*25	m	1,0000	14,50	14,50
40	p.f.	Cablu SIP-2A 1*35+1*54.6	m			20,83
	2-4	Cablu SIP-2A 1*35+1*54.6	m	1,0000	20,83	20,83
41	p.f.	Banda F2007	m			7,92

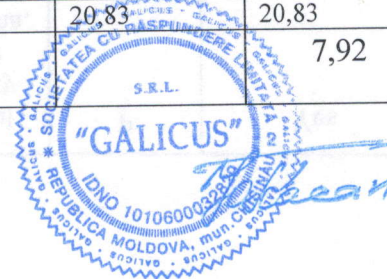

1	2	3	4	5	6	7
	2- 5	Banda F2007	m	1,0000	7,92	7,92
42	p.f.	Screpa A200	buc			2,17
	2- 6	Screpa A200	buc	1,0000	2,17	2,17
43	p.f.	Clema ES-1500	buc			53,33
	2- 7	Clema ES-1500	buc	1,0000	53,33	53,33
44	p.f.	Consola CA-1500	buc			32,50
	2- 8	Consola CA-1500	buc	1,0000	32,50	32,50
45	p.f.	Clema PA-1500	buc			41,58
	2- 9	Clema PA-1500	buc	1,0000	41,58	41,58
46	p.f.	Clema P2*95	buc			22,50
	2- 10	Clema P2*95	buc	1,0000	22,50	22,50
47	p.f.	Clema CZEP-13	buc			21,00
	2- 11	Clema CZEP-13	buc	1,0000	21,00	21,00
48	p.f.	Clema CDR/CN IS 95 UK	buc			20,83
	2- 12	Clema CDR/CN IS 95 UK	buc	1,0000	20,83	20,83
49	p.f.	Clema PIC-1-1	buc			15,83
	2- 13	Clema PIC-1-1	buc	1,0000	15,83	15,83
50	p.f.	Curea CSB	buc			1,75
	2- 14	Curea CSB	buc	1,0000	1,75	1,75
51	p.f.	Capac elastic CECT 6-35	buc			3,33
	2- 15	Capac elastic CECT 6-35	buc	1,0000	3,33	3,33
52	p.f.	Bandaj p/u fixarea	buc			14,17
	2- 16	Bandaj p/u fixarea	buc	1,0000	14,17	14,17
53	p.f.	Tub de plastic gofrat d.20	m			3,44
	2- 17	Tub de plastic gofrat d.20	m	1,0000	3,44	3,44
54	p.f.	Tub metalic gofrat izolat d.50	m			24,17
	2- 18	Tub metalic gofrat izolat d.50	m	1,0000	24,17	24,17
55	p.f.	Taimer TƏ-15	buc			375,00
	2- 19	Taimer TƏ-15	buc	1,0000	375,00	375,00
56	p.f.	Fir PV1 2.5mm2	m			3,25
	2- 20	Fir PV1 2.5mm2	m	1,0000	3,25	3,25
57	p.f.	Conductor de legare la pamint	m			10,00
	2- 21	Conductor de legare la pamint	m	1,0000	10,00	10,00
58	p.f.	Otel rotund d.16	kg			14,50

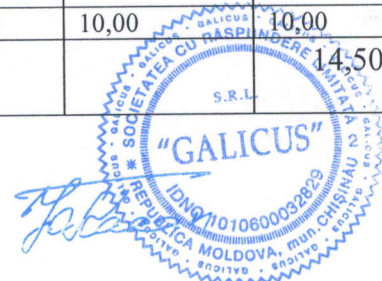

1	2	3	4	5	6	7
	2- 22	Otel rotund d.16	kg	1,0000	14,50	14,50
59	p.f.	Otel rotund d.10	kg			13,30
	2- 24	Otel rotund d.10	kg	1,0000	13,30	13,30
60	p.f.	Dispozitiv de fixare p/u consola	buc			60,00
	2- 25	Dispozitiv de fixare p/u consola	buc	1,0000	60,00	60,00
61	p.f.	Beton M200	m3			750,00
	2-26	Beton M200	m3	1,0000	750,00	750,00
62	p.f.	Terminal cablu A35	buc			2,75
	2- 30	Terminal cablu A35	buc	1,0000	2,75	2,75
63	p.f.	Terminal cablu A50	buc			3,58
	2- 31	Terminal cablu A50	buc	1,0000	3,58	3,58
64	p.f.	Sina PE	buc			23,33
	2- 32	Sina PE	buc	1,0000	23,33	23,33
65	p.f.	Sina Dn L-0.5	buc			8,50
	2- 33	Sina Dn L-0.5	buc	1,0000	8,50	8,50
		3. Utilaj				
66	p.f.	Corpuri de iluminat cu surse LED 14W IP65	buc			2 044,38
	3-1	Corpuri de iluminat cu surse LED 14W IP65	buc	1,0000	2 044,38	2 044,38
67	p.f.	Corpuri de iluminat cu surse LED 37W IP65	buc			2 100,35
	3-021	Corpuri de iluminat cu surse LED 37W IP65	buc	1,0000	2 100,35	2 100,35
68	p.f.	Dulap de comanda	buc			921,00
	3- 4	Dulap de comanda	buc	1,0000	921,00	921,00
69	p.f.	Contor electronic 112A	buc			416,67
	3- 5	Contor electronic 112A	buc	1,0000	416,67	416,67
70	p.f.	Dulap la 12 mod. IP54	buc			475,00
	3- 6	Dulap la 12 mod. IP54	buc	1,0000	475,00	475,00
71	p.f.	Releu de tensiune 220V	buc			415,67
	3- 8	Releu (de tensiune 220V	buc	1,0000	415,67	415,67
72	p.f.	Contactator 220V	buc			398,33
	3- 9	Contactator 220V	buc	1,0000	398,33	398,33
73	p.f.	Automat 1p B25 A	buc			21,09
	3- 10	Automat 1p B25A	buc	1,0000	21,09	21,09

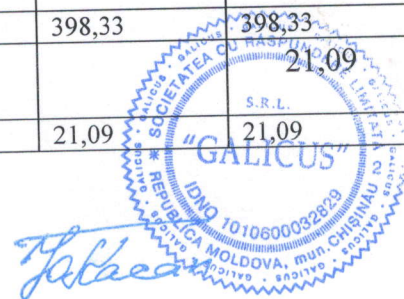

1	2	3	4	5	6	7
74	p.f.	Automat 1p C25 A	buc			21,09
	3- 11	Automat 1p C25 A	buc	1,0000	21,09	21,09
75	p.f.	Automat 1p C32 A	buc			21,09
	3- 12	Automat 1p C32 A	buc	1,0000	21,09	21,09
76	p.f.	Separator de sarcina 1p 63A	buc			21,91
	3- 13	Separator de sarcina 1p 63 A	buc	1,0000	21,91	21,91
77	p.f.	Descarcator B 1p	buc			116,67
	3- 131	Descarcator B 1p	buc	1,0000	116,67	116,67
78	p.f.	Detensionator OPIB1B	buc			375,00
	3- 14	Detensionator OPIB1B	buc	1,0000	375,00	375,00
79	p.f.	Siguranta 2A	buc			5,83
	3- 15	Siguranta 2A	buc	1,0000	5,83	5,83
80	p.f.	Fotoreleu	buc			375,00
	3- 7	Fotoreleu	buc	1,0000	375,00	375,00

Intocmit

(funcția, semnătura)

Verificat

(funcția, semnătura)

