



MINISTERIO
DE INDUSTRIA, COMERCIO Y
TURISMO

DIRECCIÓN GENERAL DE INDUSTRIA Y
DE LA PEQUEÑA Y MEDIANA EMPRESA

SUBDIRECCIÓN GENERAL DE
CALIDAD Y SEGURIDAD INDUSTRIAL



E9-02.1253 Ext 06
Página / Page 1/2

Relativa a / Concerning: - ~~la concesión de la homologación / approval granted~~
- ~~la extensión de homologación / approval extended~~
- ~~la denegación de la homologación / approval refused~~
- ~~la retirada de la homologación / approval withdrawn~~
- ~~el cese definitivo de la producción / production definitely discontinued~~

de un tipo de neumático para vehículos de motor de conformidad con el Reglamento nº 30 / *of a type of pneumatic tyre for motor vehicles pursuant to Regulation No. 30*

Nº de homologación / Approval No.: E9-02.1253

Nº de extensión / Extension No.: 06

1. Nombre y dirección del fabricante /
Manufacturer's name and address : SHANDONG LONGYUE RUBBER CO., LTD.
The South of Yalujiang Road, Wenzhuang Village Qinghe Agency
of Cao County, Heze City, Shandong Province, P.R. China
2. Designación de tipo de neumático /
Tyre type designation : 185/65R15 88H
- 2.1. Marca(s) / *Trade mark(s)* : GRENLANDER; ARIVO; CONSTANCY; ILINK; LUXXAN;
RHINO; BESTRICH; CRYSTAL; **T TYRE; ROCKBLADE;**
FRONWAY; SAILWIN; XBRI
- 2.2. Banda de rodadura / *Tread pattern* : LY688; L-COMFORT68; INSPIRER C2; COMFORT355; E02;
Cruise; ASPIRER C3; PREMIO ARZ2; **SAFEWAY 68;**
ANTARES 68; FASTWAY; ROCK 688; LY166; L-GRIP16;
INSPIRER E2; ECO155; TWO; E01; ECOLOGY; Enduring;
ECOGREEN 16; POLARIS 16; ROCK 666; LY266; L-
SPORT26; INSPIRER S2; UHP255; LY288; L-POWER28;
DURAMAX 28; RACINGMAX 28; TRANSITO ARZ6-M;
CITYMAX; INSPIRER L6; GTR501; E33; Strength; ROCK
818
3. Si procede, nombre y dirección del
representante del fabricante /
*If applicable, name and address of
the manufacturer's representative* : ---
4. Descripción resumida / *Summarised
description* :
- 4.1. Designación tamaño neumático /
Tyre size designation : 185/65R15
- 4.2. Categoría de uso /
Category of use : normal / ~~nieve~~ / ~~uso temporal~~ / ~~uso especial~~
normal / ~~snow~~ / ~~temporary use~~ / ~~special use~~
- 4.3. Estructura /
Structure : ~~diagonal~~ / ~~diagonal-cinturado~~ / ~~radial~~ / ~~autoportante~~
~~diagonal~~ / ~~bias belted~~ / ~~radial~~ / ~~run-flat tyre~~



MINISTERIO
DE INDUSTRIA, COMERCIO Y
TURISMO

DIRECCIÓN GENERAL DE INDUSTRIA Y
DE LA PEQUEÑA Y MEDIANA EMPRESA

SUBDIRECCIÓN GENERAL DE
CALIDAD Y SEGURIDAD INDUSTRIAL



E9-02.1253 Ext 06
Página / Page 2/2

- 4.4. Símbolo de la categoría de velocidad / *Speed category symbol* : H
- 4.5. Índice de capacidad de carga / *Load capacity index* : 88
5. Servicio técnico y, en su caso, laboratorio de ensayo acreditado para la homologación o la verificación de la conformidad / *Technical service and, where applicable, test laboratory approved for purposes of approval or of verification of conformity* : IDIADA
6. Fecha del informe expedido por este servicio / *Date of report issued by that service* : 16/10/2018
7. Número del informe expedido por este servicio / *Number of report issued by that service* : CN13030182; CN14050245; CN15010167; CN15050070; CN15080156; CN16030071; **CN18100483**
8. Motivos de la extensión (en su caso) / *Reason(s) of extension (if applicable)* : Ver informe de ensayo número CN18100483 / See Test Report Num CN18100483
9. Observaciones / *Any remarks* : ---
10. Lugar / *Place* : Madrid
11. Fecha / *Date* : Ver firma electrónica / *See digital signature*
12. Firma / *Signature* :
- EL SUBDIRECTOR GENERAL DE CALIDAD Y SEGURIDAD INDUSTRIAL
Resolución P.D. del DIRECTOR GENERAL DE INDUSTRIA Y DE LA PYME de 25-10-2012
13. La lista de los documentos que figuran en el expediente de homologación los cuales son depositados en los servicios administrativos que han expedido la homologación y que podrán obtenerse bajo petición. / *The list of documents in the approval file which are deposited at the administrative service having delivered the approval and which can be obtained upon request*
- Formulario de solicitud referente a la autorización ECE para neumático en cumplimiento del Reglamento número 30 / *Application form relating to ECE approval for a pneumatic tyre pursuant to Regulation number 30.*
 - Dibujo del costado del neumático, banda de rodadura y sección transversal / *The drawing of the tyre's sidewalls, tread and dimensioned cross-section.*
 - El informe mencionado en el punto 7 / *The test report as mentioned in item 7.*


INFORME N° / REPORT No. CN18100483

HOMOLOGACIÓN DE NEUMÁTICOS PARA AUTOMÓVILES
Y SUS REMOLQUES SEGÚN EL REGLAMENTO 30.02 ECE /
*APPROVAL OF PNEUMATIC TYRES FOR MOTOR VEHICLES
AND THEIR TRAILERS REFERRING TO REGULATION 30.02 ECE*

EXTENSION VI

Fabricante / *Manufacturer* : SHANDONG LONGYUE RUBBER CO., LTD.
The South of Yalujiang Road, Wenzhuang Village Qinghe
Agency of Cao County, Heze City, Shandong Province, P.R.
China

Marca(s) / *Trade mark(s)* : GRENLANDER; ARIVO; CONSTANCY; ILINK; LUXXAN;
RHINO; BESTRICH; CRYSTAL; **T TYRE; ROCKBLADE; FRONWAY; SAILWIN; XBRI**

Banda de rodadura / *Tread pattern* : LY688; L-COMFORT68; INSPIRER C2; COMFORT355; E02;
Cruise; ASPIRER C3; PREMIO ARZ2; **SAFEGWAY 68; ANTARES 68; FASTWAY; ROCK 688; LY166; L-
GRIP16; INSPIRER E2; ECO155; TWO; E01; ECOLOGY; Enduring; ECOGREEN 16; POLARIS 16;
ROCK 666; LY266; L-SPORT26; INSPIRER S2; UHP255; LY288; L-POWER28; DURAMAX 28;
RACINGMAX 28; TRANSITO ARZ6-M; CITYMAX; INSPIRER L6; GTR501; E33; Strength; ROCK 818**

Designación de tipo de neumático / *Tyre type designation(s)* : 185/65R15 88H

Designación dimensional del neumático / *Tyre size designation* : 185/65R15

Lugar y fecha de emisión del informe / *Place and date of test report issue* : L'Albornar, Santa Oliva (Tarragona)
16/10/2018

CONCLUSIONES / CONCLUSIONS: Las modificaciones introducidas en el neumático, como se detallan en el Anexo a este Informe, son objeto de extensión de homologación respecto al tipo homologado (Informe CN13030182; CN14050245; CN15010167; CN15050070; CN15080156; CN16030071) y **CUMPLEN** con las prescripciones relativas a la homologación de neumáticos según el Reglamento No.30.02 ECE / *Modifications introduced to the tyre, as detailed in the Annex to this report, grant-grounds for approval extension with respect to formerly certified tyre-type (Test Report No. CN13030182; CN14050245; CN15010167; CN15050070; CN15080156; CN16030071) and FULFILS the requirements of pneumatic tyres according to Regulation 30.02 ECE.*

Realizado/ *Performed by*

V. B°./ *Revised by:*


Zhaocai(frank) Yu
INGENIERO DE ENSAYOS
TEST ENGINEER



Lluís Sans Gomis
JEFE DE DEPARTAMENTO
DEPARTMENT MANAGER

- * LOS RESULTADOS PRESENTADOS SE REFIEREN ÚNICAMENTE A LA MUESTRA ENSAYADA.
THE PRESENTED RESULTS REFER ONLY TO THE TESTED SAMPLE
- * QUEDA TERMINANTEMENTE PROHIBIDA LA REPRODUCCIÓN PARCIAL DE ESTE INFORME SIN PERMISO EXPRESO DE IDIADA.
THE PARTIAL REPRODUCTION OF THIS REPORT WITHOUT THE PERMISSION OF IDIADA IS COMPLETELY FORBIDDEN



ANEXO AL INFORME / ANNEX TO THE REPORT

MOTIVOS DE EXTENSIÓN / EXTENSION REASON

- Inclusión de marca / *Addition of trade mark* : **T TYRE; ROCKBLADE; FRONWAY; SAILWIN; XBRI**
- Inclusión de banda de rodadura / *Addition of tread pattern* : **SAFEWAY 68; ANTARES 68; FASTWAY; ROCK 688; LY166; L-GRIP16; INSPIRER E2; ECO155; TWO; E01; ECOLOGY; Enduring; ECOGREEN 16; POLARIS 16; ROCK 666; LY266; L-SPORT26; INSPIRER S2; UHP255; LY288; L-POWER28; DURAMAX 28; RACINGMAX 28; TRANSITO ARZ6-M; CITYMAX; INSPIRER L6; GTR501; E33; Strength; ROCK 818**
- Supresión de marca / *Deletion of trade mark* : **SHINEROAD; TECHKING; KINGRUN; TRANSKING; LONGYUE; LONGYEAR; TAUROPPOWER; GREFORCE**
- Supresión de banda de rodadura / *Deletion of tread patterns* : **ECOSTAR T320; TR200; TLH59; SPEEDLINE; GECO H2**

1. DESCRIPCIÓN TÉCNICA DEL NEUMÁTICO / TECHNICAL DESCRIPTION OF THE PNEUMATIC TYRE:

Marca(s) / <i>Trade Mark(s)</i>	: GRENLANDER; ARIVO; CONSTANCY; ILINK; LUXXAN; RHINO; BESTRICH; CRYSTAL; T TYRE; ROCKBLADE; FRONWAY; SAILWIN; XBRI
Banda de rodamiento / <i>Tread pattern</i>	: LY688; L-COMFORT68; INSPIRER C2; COMFORT355; E02; Cruise; ASPIRER C3; PREMIO ARZ2; SAFEWAY 68; ANTARES 68; FASTWAY; ROCK 688; LY166; L-GRIP16; INSPIRER E2; ECO155; TWO; E01; ECOLOGY; Enduring; ECOGREEN 16; POLARIS 16; ROCK 666; LY266; L-SPORT26; INSPIRER S2; UHP255; LY288; L-POWER28; DURAMAX 28; RACINGMAX 28; TRANSITO ARZ6-M; CITYMAX; INSPIRER L6; GTR501; E33; Strength; ROCK 818
Designación de tipo de neumático / <i>Tyre type designation</i>	: 185/65R15 88H
Designación dimensional del neumático / <i>Tyre-size designation</i>	: 185/65R15
Categoría de utilización / <i>Category of use</i>	: normal / nieve / especial / uso temporal normal / snow / special / temporary use
Estructura / <i>Structure</i>	: diagonal / diagonal-cinturado / radial / autoportante diagonal / bias-belted / radial / run-flat tyre
Símbolo de categoría de velocidad / <i>Speed category symbol</i>	: H
Índice de capacidad de carga / <i>Load-capacity index</i>	: 88
Sección transversal del neumático / <i>Tyre cross-section</i>	: Ver documentación técnica / <i>See technical documentation</i> Zhaocai(frank) Yu INGENIERO DE ENSAYOS TEST ENGINEER

* LOS RESULTADOS PRESENTADOS SE REFIEREN ÚNICAMENTE A LA MUESTRA ENSAYADA.

THE PRESENTED RESULTS REFER ONLY TO THE TESTED SAMPLE

* QUEDA TERMINANTEMENTE PROHIBIDA LA REPRODUCCIÓN PARCIAL DE ESTE INFORME SIN PERMISO EXPRESO DE IDIADA.

THE PARTIAL REPRODUCTION OF THIS REPORT WITHOUT THE PERMISSION OF IDIADA IS COMPLETELY FORBIDDEN

DOCUMENTACIÓN TÉCNICA /
TECHNICAL DOCUMENTATION

**APPLICATION FOR APPROVAL OF A TYPE OF PNEUMATIC TYRE FOR PRIVATE CARS ACCORDING TO ECE
REGULATION No. 30, 02 SERIES OF AMENDMENTS**

- | | | | |
|------|---|---|---|
| 1. | Tyre type designation | : | 185/65R15 88H |
| 1.1 | Trade mark(s) | : | GRENLANDER; ARIVO; CONSTANCY; ILINK; LUXXAN;
RHINO; BESTRICH; CRYSTAL; <u>T TYRE</u> ; <u>ROCKBLADE</u> ;
<u>FRONWAY</u> ; SAILWIN; XBRI |
| 1.2 | Tread pattern | : | LY688; L-COMFORT68; INSPIRER C2; <u>COMFORT355</u> ;
E02; Cruise; ASPIRER C3; PREMIO ARZ2; <u>SAFEWAY 68</u> ;
<u>ANTARES 68</u> ; <u>FASTWAY</u> ; <u>ROCK 688</u> ; <u>LY166</u> ; <u>L-GRIP16</u> ;
<u>INSPIRER E2</u> ; <u>ECO155</u> ; <u>TWO</u> ; <u>E01</u> ; <u>ECOLOGY</u> ; <u>Enduring</u> ;
<u>ECOGREEN 16</u> ; <u>POLARIS 16</u> ; <u>ROCK 666</u> ; <u>LY266</u> ; <u>L-</u>
<u>SPORT26</u> ; <u>INSPIRER S2</u> ; <u>UHP255</u> ; <u>LY288</u> ; <u>L-POWER28</u> ;
<u>DURAMAX 28</u> ; <u>RACINGMAX 28</u> ; <u>TRANSITO ARZ6-M</u> ;
<u>CITYMAX</u> ; <u>INSPIRER L6</u> ; <u>GTR501</u> ; <u>E33</u> ; <u>Strength</u> ; <u>ROCK</u>
<u>818</u> |
| 2. | Manufacturer's name and address | : | SHANDONG LONGYUE RUBBER CO., LTD.
The South of Yalujiang Road, Wenzhuang Village Qinghe
Agency of Cao County, Heze City, Shandong Province, P.R.
China |
| 3. | If applicable, name and address of
manufacturer's representative | : | --- |
| 4. | Summarised description, | | |
| 4.1. | Tyre size designation | : | 185/65R15 |
| 4.2. | Category of use | : | normal/ snow / <u>special use</u> / <u>temporary use</u> ⁽¹⁾ |
| 4.3. | Structure | : | diagonal / bias belted / <u>radial</u> / <u>run flat tyre</u> ⁽¹⁾ |
| 4.4. | Speed category symbol | : | H |
| 4.5. | Load capacity index | : | 88 |
| 5. | Factor 'x' | : | 0.70 |
| 6. | Ply-rating number for diagonal (bias-ply) tyres | : | Not applicable |
| 7. | Rims on which the tyre can be mounted | : | 5.5J |
| 8. | Measuring rim and test rim | : | see attached test report |
| 9. | State whether the tyre is | : | tubeless / tube type ⁽¹⁾ |
| 10. | State whether the tyre is | : | standard / reinforced / <u>T-type temporary use spare tyre</u> ⁽¹⁾ |
| 11. | Submitted for approval on (date) | : | 2018/9/26 |

We herewith declare that we have not applied and will not apply for approval with another Contracting Party of the ECE for the same type of product.

MANUFACTURER'S STAMP

Signature :

.....



Name:

THIS APPLICATION IS ACCOMPANIED BY:

- Application form, relating to ECE approval for pneumatic tyre pursuant Regulation No.30
- A drawing of the tyre's side wall, tread and dimensioned cross section.
- The test report.

(1) Strike out what does not apply.

(2) Modified points are underlined for extension.

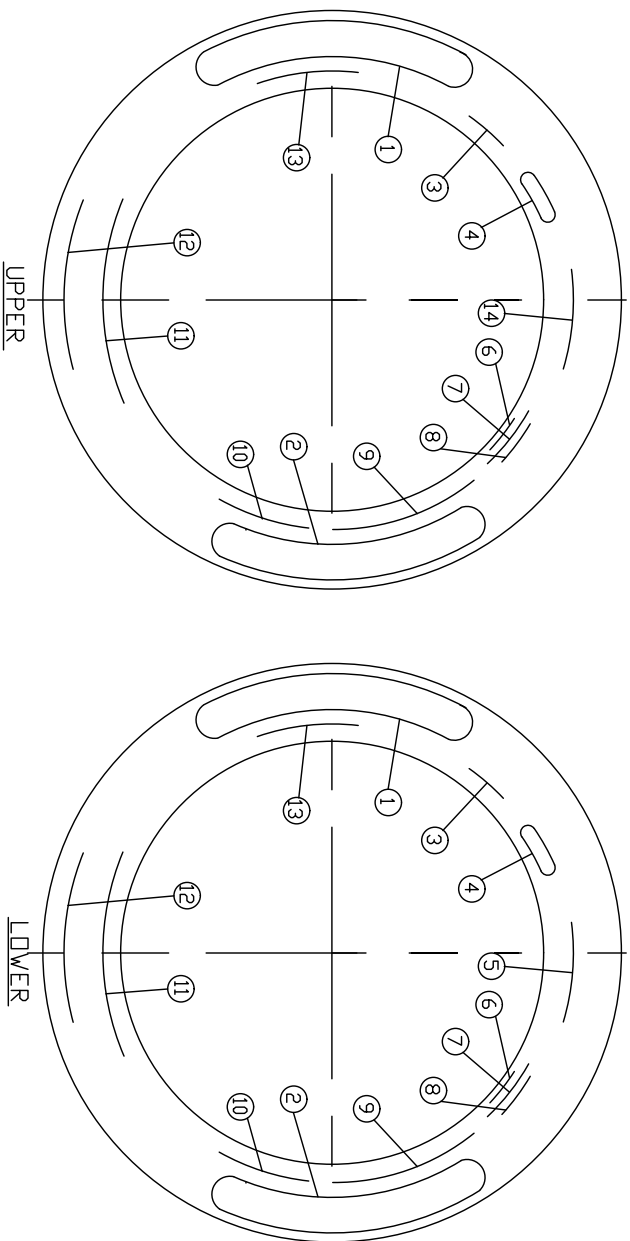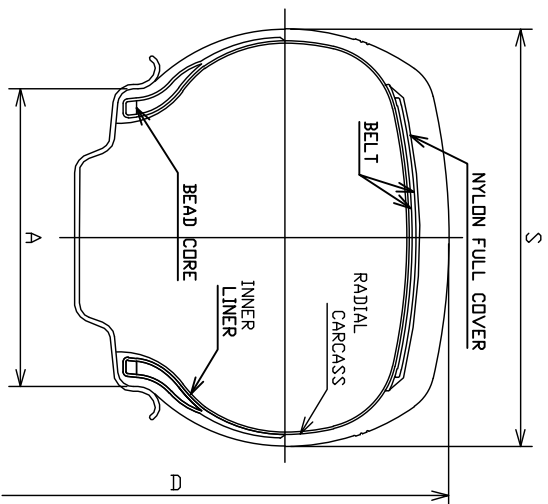

TREAD PATTERNS

REFER TO ATTACHMENT NO.11

1	GRENLANDER; ARIVO; CONSTANCY; ILINK; LUXXAN; RHINO; BESTRICH; CRYSTAL; I. TYRE; ROCKBLADE; FROWWAY; SAILWIN; XBR1	9	PLIES: TREAD 1P POLYESTER+STEEL+NYLON SIDEWALL 1P POLYESTER
2	LY688; L-COMFORT68; INSPIRER C2; COMFORT355; EO2; Cruise; PREMIO AR22; SAFEWAY 68; ANTARES 68; FASTWAY; ROCK 688	10	MAX LOAD 560kg (1235LBS) MAX PRESS 300kPa (44PSI)
3	RADIAL TUBELESS	11	SAFETY WARNING
4	ECE APPROVAL MARK	12	TREADWEAR 380 TRACTION A TEMPERATURE A
5	DOT 7BPF AD5 XXXX(DATE CODE)	13	185/65R15 88H
6	MADE IN CHINA	14	DOT 7BPF AD5
7	STANDARD RIM: 5 1/2J		
8	MULD No.		

TYRE SIZE	D(mm)	S(mm)	A(mm)	LOAD INDEX	REMARK
185/65R15	621	189	139.5	88H	

SCALE : FREE DATE : 2018.10.07

DESIGNED BY

Wang Tong

CHECKED BY

Li Ying



APPROVED BY

Shen Maoqiao


DRAWING NO.

TITLE

185/65R15 88H

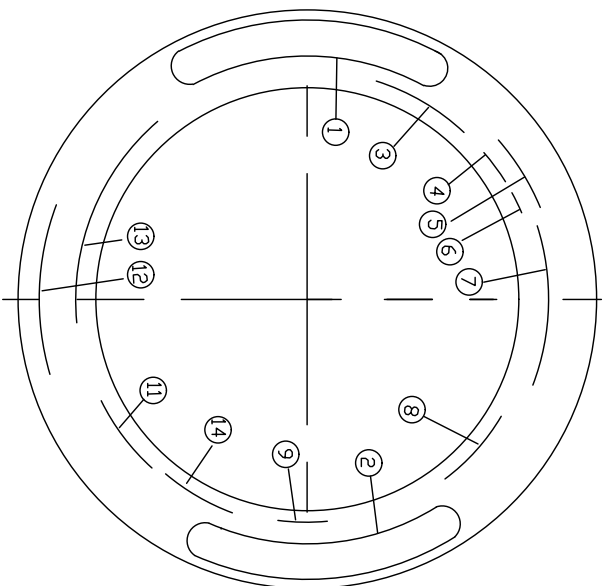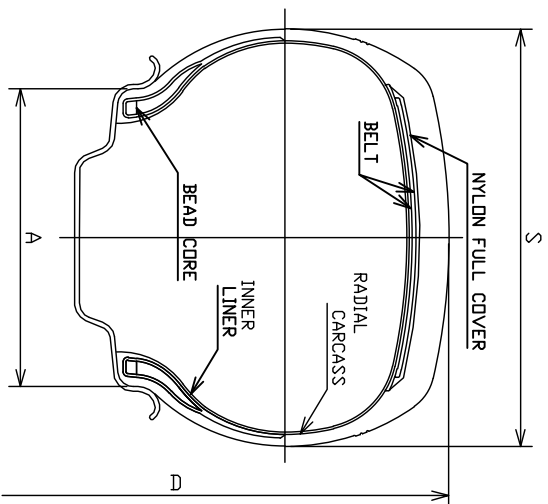

UPPER

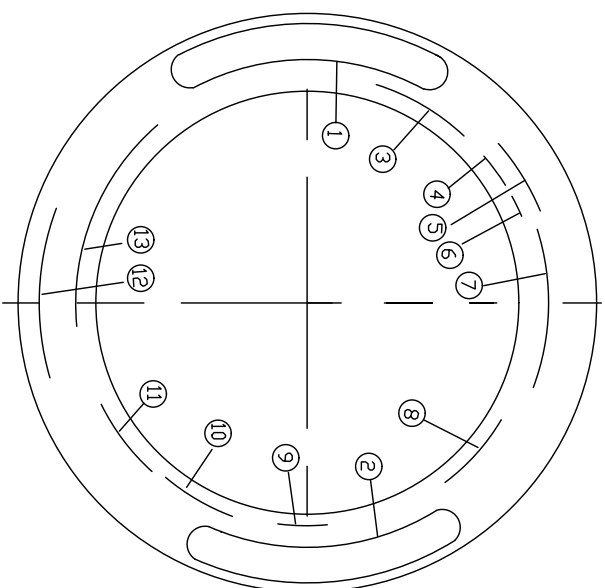

LOWER




TREAD PATTERNS

REFER TO ATTACHMENT NO.11

1	GRENLANDER;ARIVO;CONSTANCY;LINK;LUXXAN;RHINO;BESTRICH;CRYSTAL;I.TYRE;ROCKBLADE;FRONWAY;SAILMN;XBRI	8	MAX LOAD 560kg (1235LBS) MAX PRESS 300kPa (44PSI)
2	LY166;INSPIRE;E21-GRIPI6;Enduring;ECOGREEN 16;PREMIO ARZ2;EOL;ECO155;ECOLOG;TMO;POLARIS 16;ROCK 666	9	MADE IN CHINA
3	PLIES:TREAD 1POL.YESTER+2STEEL+1NYLON SIDEWALL 1POL.YESTER	10	DOT 17B XXXXXX XXXX(DATE CODE)
4	RIMS 1/2 J	11	ECE APPROVAL MARK
5	RADIAL TUBELESS	12	TREADWEAR XXX TRACTION X TEMPERATURE X
6	MULD No.	13	SAFETY WARNING
7	185/65R15 88H	14	DOT 17B XXXXXX

TIRE SIZE	D(mm)	S(mm)	A(mm)	LOAD INDEX	REMARK
185/65R15	621	189	139.5	88H	_____

SCALE : FREE	DATE : 2018.10.07	DESIGNED BY	CHECKED BY	APPROVED BY	DRAWING NO.	
SHANDONG LONGYUE RUBBER CO., LTD.		Wang Tong	Li Ying	Shen Maoqiao	TITLE	185/65R15 88H

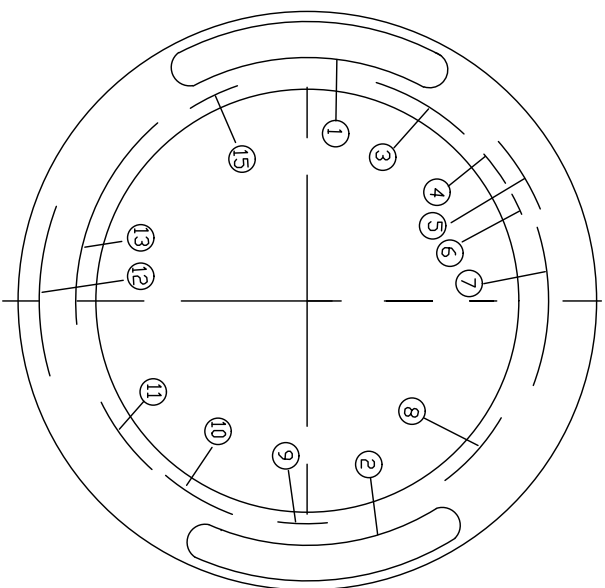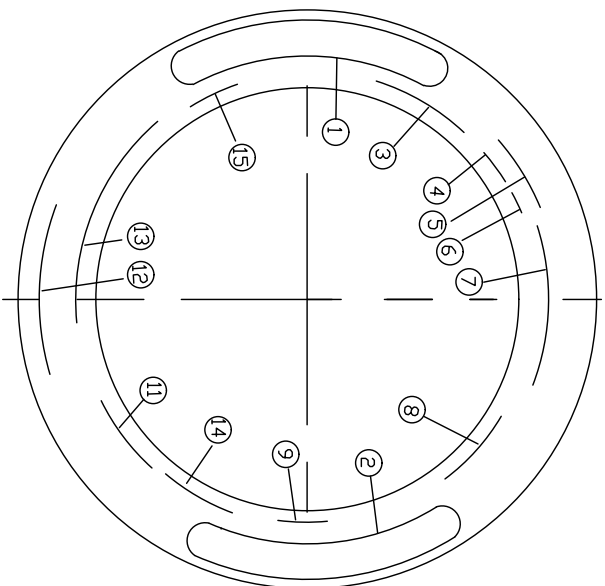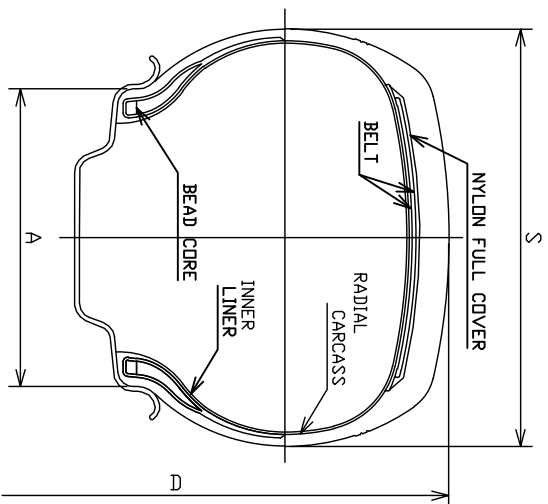

UPPER

LOWER



TREAD PATTERNS

REFER TO ATTACHMENT NO.11


1	GRENLANDER;ARIVO;CONSTANCY;LINK;LUXXAN;RHINO; BESTRICH;T TYRE;CRYSTAL;ROCKBLADE;FROMWAY; SAILWIN;XBRI	8	MAX LOAD 560kg (1235LS) MAX PRESS 300kPa (44PSI)
2	L Y266;L-SPORT26;UHP255;INSPIRER S2	9	MADE IN CHINA
3	PLIES:TREAD 1POL.YESTER+2STEEL+1NYLON SIDEWALL 1POL.YESTER	10	DOT 17B XXXXXX XXXX(DATE CODE)
4	RIMS 1/2 J	11	ECE APPROVAL MARK
5	RADIAL TUBELESS	12	TREADWEAR XXX TRACTION X TEMPERATURE X
6	MULD NO.	13	SAFETY WARNING
7	185/65R15 88H	14	DOT 17B XXXXXX
		15	OUTSIDE(LOWER)/INSIDE(UPPER)

TIRE SIZE	D(mm)	S(mm)	A(mm)	LOAD INDEX	REMARK
185/65R15	621	189	139.5	88H	

SCALE : FREE	DATE : 2018.10.07	DESIGNED BY	CHECKED BY	APPROVED BY	DRAWING NO.	
SHANDONG LONGYUE RUBBER CO., LTD.		Wang Tong	Li Ying	Shen Maoqiao	TITLE	185/65R15 88H

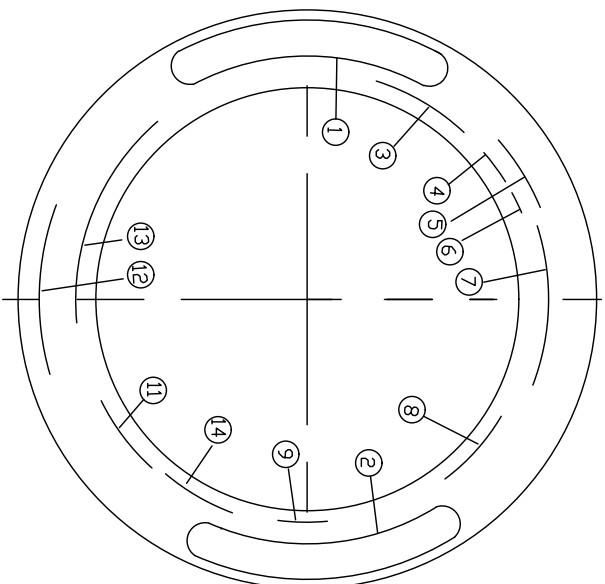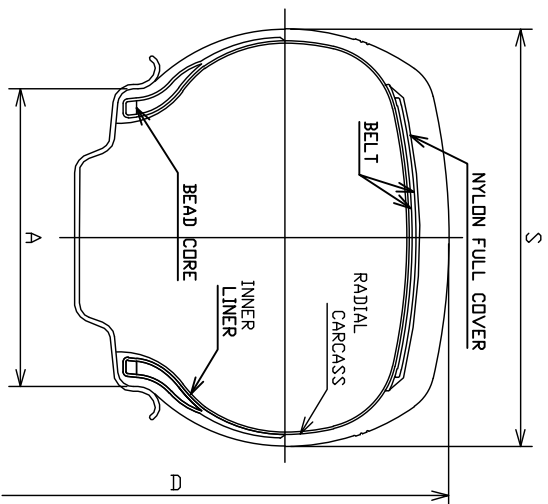

UPPER

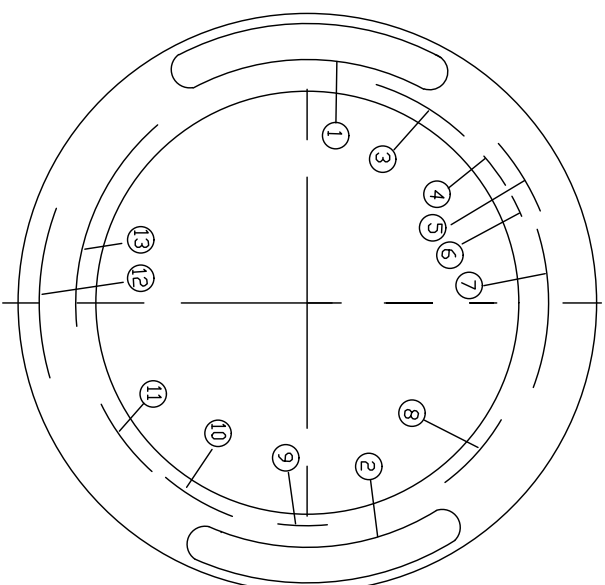

LOWER



TREAD PATTERNS

REFER TO ATTACHMENT NO.11

1	GRENLANDER;ARIVO;CONSTANCY;LINK;LUXXAN;RHINO; BESTRICH;T TYRE;CRYSTAL;ROCKBLADE;FROMWAY; SAILWIN;XBRL	8	MAX LOAD 560kg (1235LBS) MAX PRESS 300kPa (44PSI)
2	L728RL-POWER28;E33;CITMAX;DURAMAX 28;Strength;INSPIRER LG; TRANSITO ARZ6-M;ROCK 818;GIRSOI;RACINGMAX 28	9	MADE IN CHINA
3	PLIES:TREAD 1POLYESTER+2STEEL+1NYLON SIDEWALL 1POLYESTER	10	DOT 17B XXXXXX XXXX(DATE CODE)
4	RIMS 1/2 J	11	ECE APPROVAL MARK
5	RADIAL TUBELESS	12	TREADWEAR XXX TRACTION X TEMPERATURE X
6	MULD No.	13	SAFETY WARNING
7	185/65R15 88H	14	DOT 17B XXXXXX

TIRE SIZE	D(mm)	S(mm)	A(mm)	LOAD INDEX	REMARK
185/65R15	621	189	139.5	88H	

SCALE : FREE	DATE : 2018.10.07	DESIGNED BY	CHECKED BY	APPROVED BY	DRAWING NO.	
SHANDONG LONGYUE RUBBER CO., LTD.		Wang Tong	Li Ying	Shen Maoqiao	TITLE	185/65R15 88H

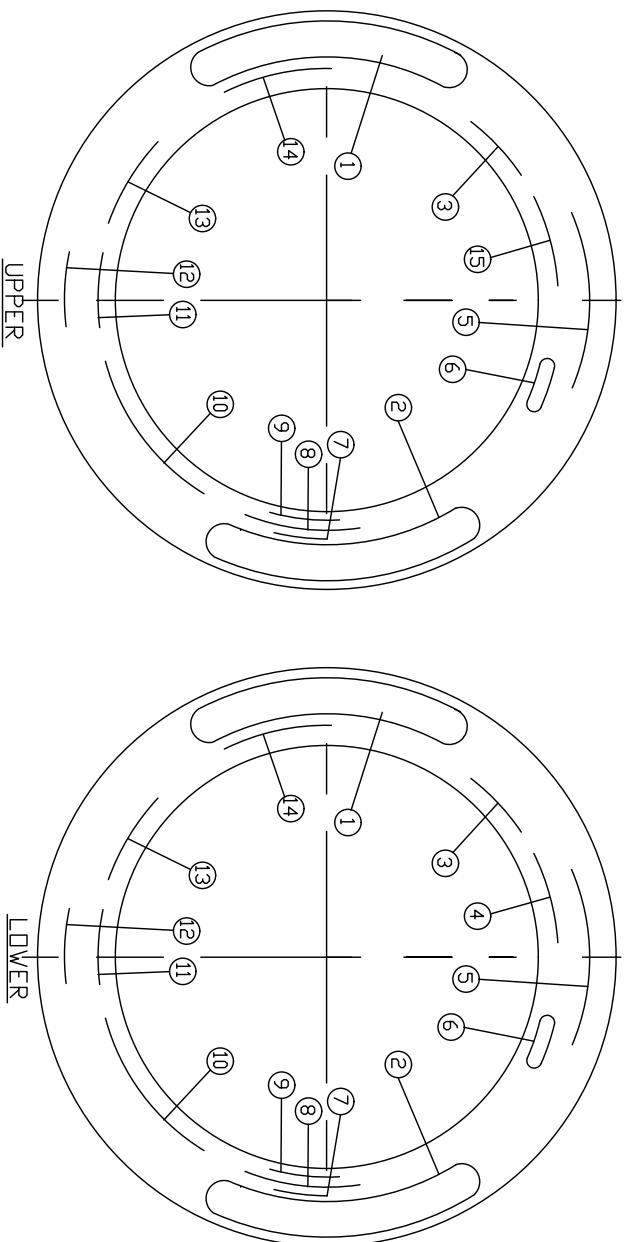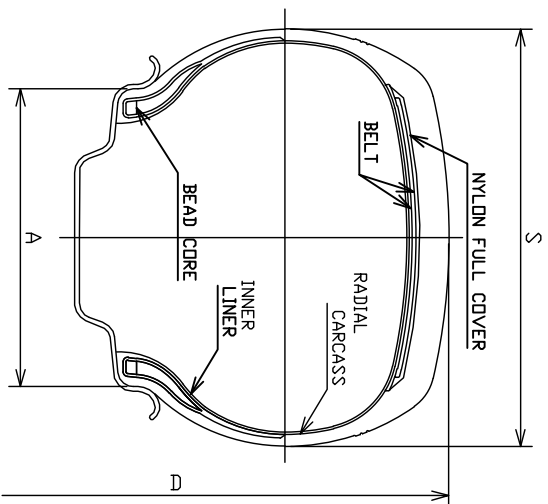

TREAD PATTERNS

REFER TO ATTACHMENT NO.11


1	LUXXAN	9	MADE IN CHINA
		10	SAFETY WARNING
2	ASPIRER C3	11	MAX LOAD 560kg (1235LBS) MAX. PRESS 300kPa (44PSI)
3	RADIAL TUBELESS STEEL BELTED	12	OUTSIDE(LOWER)/INSIDE(UPPER)
4	DOT 7BBF BML XXXX(DATE CODE)	13	TREAD 4 PLYES, 1POLYESTER+2STEEL+1NYLON SIDEWALL 1 POLYESTER
5	TREADWEAR 380 TRACTION A TEMPERATURE A	14	185/65R15 88H
6	ECE APPROVAL MARK	15	DOT 7BBF BML
7	MOLD No.		
8	STANDARD RIM 5 1/2J		

TIRE SIZE	D(mm)	S(mm)	A(mm)	LOAD INDEX	SPEED CODE	REMARK
185/65R15	621	189	139.5	88H		


SCALE : FREE	DATE : 2018.10.07	DESIGNED BY	CHECKED BY	APPROVED BY	DRAWING NO.	
SHANDONG LONGYUE RUBBER CO., LTD.		Wang Tong	Li Ying	Shen Maoqiao	TITLE	185/65R15 88H

ATTACHMENT NO.11


TIRE SIZE 185/65R15 88H




LY166-INSPIRER E2: L-GRIPI6;Enduring; ECOGREEN 16; PREMIO AR22;E01; ECO155;ECOLOGY;TWC; POLARIS 16;ROCK 666	SKID
	DEPTH
	8.0




LY266-L-SPORT26; UHP255; INSPIRER SZ	SKID
	DEPTH
	8.2



ASPIRER C3	SKID
	DEPTH
	8.2



LY288-L-POWER28;E33; CITIMAX;DURAMAX 28; Strength;INSPIRER L6; TRANSITO AR26-M; ROCK 818;GTR501; RACINGMAX 28	SKID
	DEPTH
	8.0



LY688-L-COMFORT68; Cruise;ANTARES 68; SAFEMAY 68;FASTWAY; COMFORT355; INSPIRER C2; E02;ROCK 688	SKID
	DEPTH
	8.5

DRAWN BY

Wang Tong

CHECKED BY

Wangshilun

APPROVED BY

Shen Maoqiao

SHANDONG LONGYUE RUBBER TYRE CO.,LTD.