

CITYBAC®

120L



SULO®

Citybac® 120L


PRODUCT DETAILS



- 1 Standard Lid
- 2 Handles 2x
- 3 Lid rivet 2x
- 4 Marking areas

- A Body
- B Continuous handle bar
- C DIN comb lifting system, double stage
- D SULO sticker / Marking areas
- E External wheels
- F Chip nest as standard
- G Lateral grip surfaces with wave profile



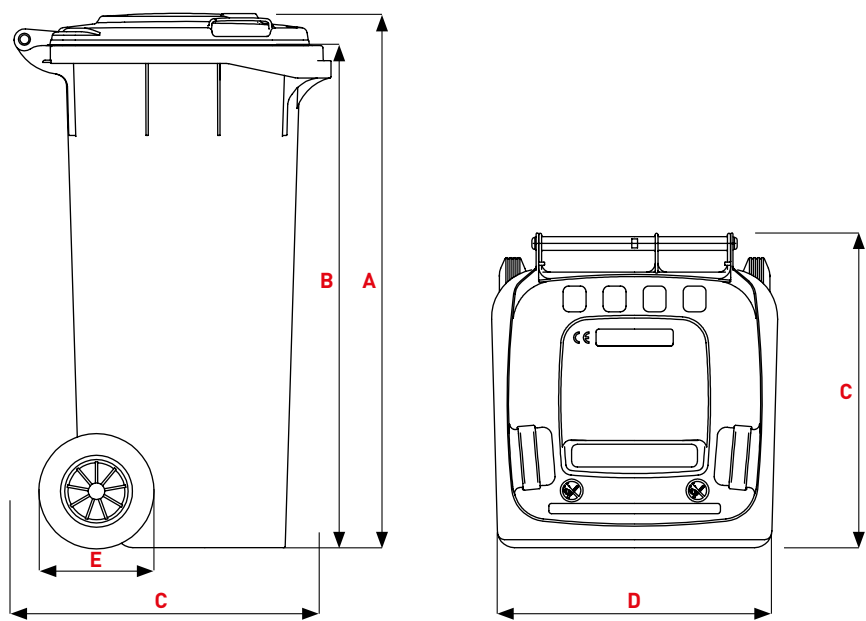

STANDARD LID

Dimensions (mm)

A Height total ~	933
B Comb height ~	871
C Bin depth ~	550
D Width total ~	500
E Wheel diameter ~	200

Weights

Tubular axle	
Nominal volume (L)	120
Empty weight (kg) ~	8,9
Max. filling weight (kg) ~	48
Max. total weight (kg) ~	60

CLIP LID

Dimensions (mm)

A Height total ~	934
B Comb height ~	871
C Bin depth ~	550
D Width total ~	500
E Wheel diameter ~	200

Weights

Tubular axle	
Nominal volume (L)	120
Empty weight (kg) ~	8,9
Max. filling weight (kg) ~	48
Max. total weight (kg) ~	60

Dimensions may vary due to production conditions. The specified empty weights are rounded average based on the standard specifications. The actual weight may be different as a result of production conditions and specifications.

Citybac® 120L

PRODUCT DETAILS

COLOURING

Bin bodies made from 100 % recycled material with a minimum of 60 % post-consumer recycled material.



GREY
RAL 7021
AT
ECO FRIENDLY
■ ■ ■ ■ ■

Perfectly set in scene with coloured **lids** for fraction identification



GREY
RAL
7021
AT



GREEN
RAL
6011
VJ



BROWN
RAL
8025
MR



BLUE
RAL
5023
BN



YELLOW
RAL
1018
JA



RED
RAL
3000
RN

ALTERNATIVE COLOURS FOR THE BIN BODY



GREEN
RAL
6011
VJ
ECO FRIENDLY
■ ■ ■ ■ ■



BROWN
RAL
8025
MR
ECO FRIENDLY
■ ■ ■ ■ ■



BLUE
RAL
5023
BN
ECO FRIENDLY
■ ■ ■ ■ ■



YELLOW
RAL
1018
JA
ECO FRIENDLY
■ ■ ■ ■ ■

Colours may vary due to production. The colour values given according to RAL are guide colours.

FRACTION MARKING



Clip available in the colours

● ● ● ● ● ●

Label for Clip Lid, individual printing possible

BIO-FILTER LID



Lid available in the colours

● ● ●

Bio-filter lid - with active bio-filter material

LID SLOT SYSTEMS

Glasss



Round slot with rubber rosette
Ø 150 mm

Paper



Opening Slot
250 x 30 mm

PEDAL



Opening by pushing the foot pedal

NOISE REDUCTION SYSTEMS



Lid Opening Noise Reduction



Lid closing damper

WHEELS



Ø 200 mm Wheel



Ø 250 mm Wheel



Triangular Locks



Padlock Fixtures



Cylinder lock with automatic function



Cylinder lock without automatic function

Citybac® Wheel2Rad

TECHNISCHE INFORMATIONEN

120 LITER	
MATERIAL OPTIONS	
Extrastarkes Polyethylen	■
COLOURS	
Standard Farben	■
Antistatische Farben	■
LID SYSTEMS	
Standard Deckel	■
Clip Deckel (RED 02)	■
Design Deckel	
Silent Deckel	
Butterfly Deckel (Zweiwegedeckel)	
Bio-Filterdeckel	■
Kabelschlitz für Clip-Deckelklappung, Beleuchtung möglich	■
LIFTING SYSTEMS	
EN 840 / DIN 60250 Aufnahme	■
LID SLOT SYSTEMS	
Glass	
50 mm slot in Blende und 150 mm slot in Blende	■
Papier	
Papier Slot 250 x 30 mm	■
Papier Slot 300 x 30 mm	
Papier Slot 300 x 60 mm	
Papier Papier mit Hebelblue	
Verpackung	
Deckel und Deckel (DID)	
LID OPENING SYSTEM	
Deckelöffnungssystem (D06) pedal	■
NOISE REDUCTION SYSTEMS	
Deckelungsbildungsempfänger	■
Deckelungsbildungsempfänger	■
VARIO SYSTEM	
VARIO Behälter in Behälter 40L Einsatz 40L	■
VARIO Behälter in Behälter 60L Einsatz 60L	■
VARIO Behälter in Behälter 80L Einsatz 80L	■
CHASSIS	
Roburachse	■
Vollachse	■

120 LITER

WHEELS

Ø 200 mm	■
Ø 250 mm	■
Ø 300 mm	

LOCKING SYSTEMS

Part lock key for Vorhängeschloss 1x	■
--------------------------------------	---

Drinkgutachloss

with Offenspelstung	■
with Offenspelstung	■

Zylinderschloss ohne Automatikfunktion

garnschlüssel	■
gruppenschlüssel	■
verschiedene schlüssel	■

Zylinderschloss mit Automatikfunktion

garnschlüssel	■
gruppenschlüssel	■
verschiedene schlüssel	■

CHIP INSTALLATION

RFID-Chip installiert ohne Barcode-Aufkleber	■
RFID-Chip installiert mit Barcode-Aufkleber	■

RFID CHIP

Transponder 134kHz HDX + HID Inlay versenden	■
Transponder 134kHz FDX versenden	■
Transponder 134kHz FDX Südschloß	■
Transponder 134kHz HDX + Glass	■
Transponder 125kHz FDX versenden	■
Transponder 125kHz FDX Südschloß	■
Transponder 13,56 MHz	■

LABELLING**Body**

SULO Aufkleber	■
Kunden Aufkleber	■
Hotspiegelung	■
Raumfinder Nummer (farblos / ss, black / white)	■

Deckel

Bestückungsplan	■
Hotspiegelung	■
Raumfinder Nummer (farblos / ss, black / white)	■
Druckprägung	■
Printaufkleber (Clip Deckel)	■

■ Standardführung
■ Option

sulo.com