


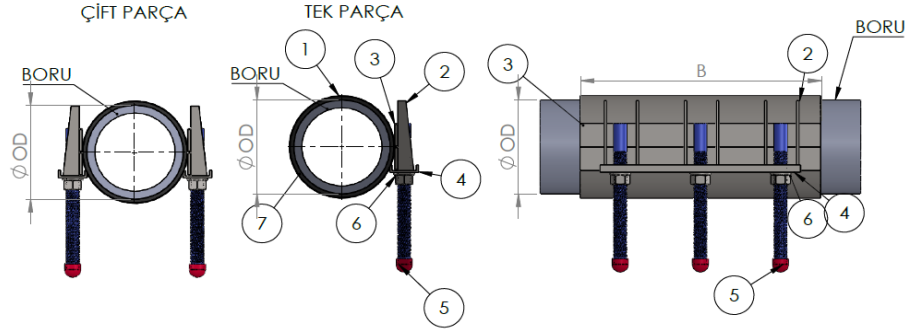

		W2 (Standard)	W5	W6
1.	Body	AISI 304	AISI 316	GGG40
2.	Side Mounts	AISI 304	AISI 316	
3.	Side Support	AISI 304	AISI 316	
4.	U Flange	AISI 304	AISI 316	
5.	Stud Bolt	AISI 304	AISI 316	
6.	Nut & Washer	AISI 304	AISI 316	
7.	Gasket (EPDM)	Temperature: -20°C to +120°C Fluid: Water, wastewater, air, solids and chemical products		
7.	Gasket (NBR) / (SİLİKON)	Temperature: -20°C to +100°C / Higher temperatures with silicone rubber Fluid: Water, gas, oil, petroleum and other hydrocarbons		

EASY 20 Repair Clamp

STANDARD PRODUCTION UP TO 16 BAR PRESSURE - THE VALUES BELOW ARE DETERMINED ACCORDING TO THE PRESSURE IN THE

Nominal Diameter	Range	Range	Pressure	Body Width	Bolt	Key Size	Torque
DN	One Piece	Two Pieces		(B)			(Max)
mm	mm	mm	bar	mm	mm	mm	Nm
80		88-110	16	300	M14	22	118
100		108-128	16	300	M14	22	118
150		159-175	16	300	M14	22	118
200		215-235	16	300	M14	22	118
250		268-288	16	300	M14	22	118
300	-	310-330	16	300	M16	24	180
PLEASE INQUIRE ABOUT MEASUREMENTS AND PRESSURES NOT LISTED IN THE TABLE.							