



Self-contained ice maker - Sprayer system Daily production up to 44 kg


| | |
|---------------|----------------------|
| Hotel | ████████████████████ |
| Restaurant | ████████████████████ |
| Fast food | ████████████████████ |
| Bar | ████████████████████ |
| Disco | ████████████████████ |
| Fish market | ████████████████████ |
| Supermarket | ████████████████████ |
| Medical & SPA | ████████████████████ |
| Industry | ████████████████████ |

► Position n°



► Features & Plus

- Compact and crystal cube
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C
- Adjustable Stainless Steel feet
- Removable and cleanable air filter
- Air or water cooling system
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF rocker switch
- Standard and special voltages
- HFC Free
- Automatic Washing system



Green-Tech Design



Side openings for better ventilation




Double water inlet (W models only)



Plug-in electrical connection

► Available ice cube size

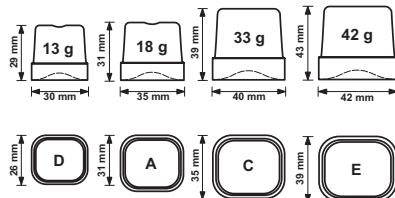

► Prod. 24h

| Air temp. | Water temp. | kg | lbs | | |
|-----------|-------------|-------|-------|------|-------|
| | | 10° C | 50° F | 7° C | 45° F |
| 21° C | 70° F | 15° C | 60° F | 42 | 93 |

2 Years Warranty
subject to limitations

► Certifications available for this model






Ice Cube

CB 416 HC



Self-contained ice maker - Sprayer system Daily production up to 44 kg

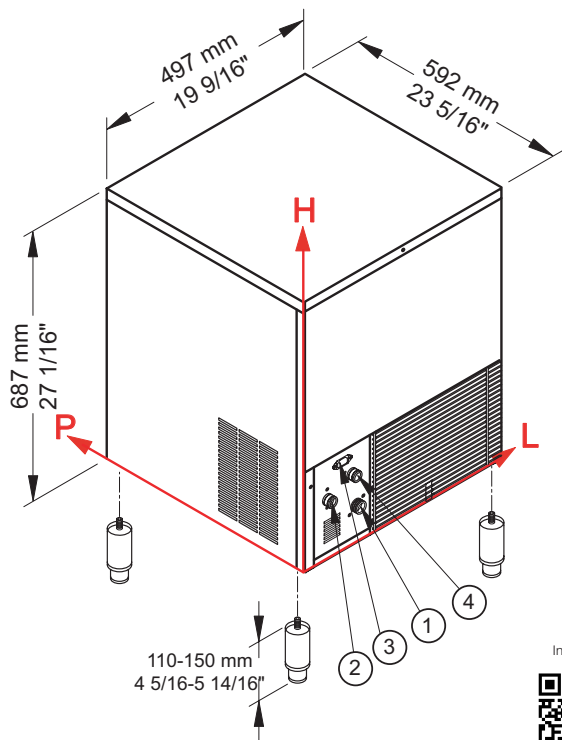

► Working conditions

- Location: **Indoor**

| | Min | Max |
|----------------------|-----------------|-----------------|
| Ambient temperature | +10° C / +50° F | +43° C / 110° F |
| Water temperature | +3° C / +37° F | +32° C / +90° F |
| Voltage | -10% | +10% |
| Water inlet pressure | 1bar (14 psi) | 6bar (84 psi) |

► Performances

| Air temperature | Water temperature | Water temperature | | | | | |
|-----------------|-------------------|-------------------|--------|-------|--------|-------|-------|
| | | 7° C | 45° F | 15° C | 60° F | 21° C | 70° F |
| 10° C | 44 kg | | | | | | |
| 50° F | 97 lbs | | | | | | |
| 21° C | | | 42 kg | | | | |
| 70° F | | | 93 lbs | | | | |
| 32° C | | | | | 32 kg | | |
| 90° F | | | | | 71 lbs | | |

► Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water in.: 130 mm / 5 2/16" - 95 mm / 3 12/16" - 3/4" ② Water out.: 56 mm / 2 3/16" - 155 mm / 6 2/16" - 24 mm / 15/16"
- ③ Electrical connections: 95 mm / 3 12/16" - 225 mm / 8 14/16" ④ Cond. water in: 119 mm / 4 11/16" - 181 mm / 7 2/16" - 3/4"
- ④ Only for water cooling systems

► Technical information

| | | | |
|---------------------------|----------------------------|----------------------------|--|
| Production in 24h | 42 kg / 93 lbs | Water consumption | A: 3 l/kg - 35,9 gal/100 lbs |
| Store capacity, up to | 16 kg / 35 lbs | | W: 15 l/kg - 179,7 gal/100 lbs |
| Cooling system | A - W | Sizes (L-P-H mm) | 497 - 592 - 687 |
| Kind of cube | A-18g, C-33g, D-13g, E-42g | (L-P-H in) | 19 9/16 - 23 5/16 - 27 1/16 |
| Refrigerant | R290 | Sizes with pack (L-P-H mm) | 550 - 660 - 860 |
| Standard voltage | 220-240 V ~ 50 Hz | (L-P-H in) | 21 10/16 - 26 - 33 14/16 |
| Average power consumption | 455 W | Net weight | 43 kg / 95 lbs |
| Fuse | 10 A | Gross weight | 51 kg / 112 lbs |
| Electrical consumption | 22 kWh/100kg | Finish | AISI 304 stainless steel, scotch brite |

All the technical information must be considered at the following conditions:

- Sizes without feet
- Standard Cube (18 g)
- Ambient temperature +21° C
- Water temperature +15° C
- Electrical consumption at +32° C (standard voltage)
- Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Rev. 00 - Issued October 2021



www.bremaice.it
info@bremaicegroup.it

We are Brema

