



RDW

Vehicle Technology Division



THE NETHERLANDS
(N E D E R L A N D)



COMMUNICATION

Concerning ⁽¹⁾ :

- ~~- approval granted~~
- approval extended
- ~~- approval refused~~
- ~~- approval withdrawn~~
- ~~- production definitely discontinued~~

of a type of tyre for motor vehicles pursuant to Regulation number 30.

Approval number: E4-30R-02101578

Extension number: 03

- | | |
|--|--|
| 1. Manufacturer's name and address | : Continental Reifen Deutschland GmbH
Vahrenwalder Str. 9
30165 Hannover
Germany |
| 2. Tyre type designation ⁽²⁾ | |
| 2.1 Brand-name(s)/trademark(s) | : CONTINENTAL, GISLAVED |
| 2.2 Trade description(s)/Commercial name(s) | : GISLAVED, NORD*FROST 200
GISLAVED, SOFT*FROST 200
CONTINENTAL, ICECONTACT 2
<u>CONTINENTAL, VikingContact 7</u> |
| 3. If applicable, name and address of the manufacturer's representative | : not applicable |
| 4. Summarized description | |
| 4.1 Tyre size designation | : 245/45 R 19 |
| 4.2 Category of use | : normal /snow / special use / temporary use ⁽¹⁾ |
| 4.3 Structure | : diagonal / bias belted / radial/ run-flat tyre ⁽¹⁾ |
| 4.4 Speed category symbol | : T |
| 4.5 Load-capacity index | : 102 |
| 5. Technical Service and, where applicable, test laboratory approved for purposes of approval or of verification of conformity | : Continental Reifen Deutschland GmbH
Vahrenwalder Str. 9
30165 Hannover
Germany |
| 6. Date of report issued by that service | : 31.05.2017 |
| 7. Number of report issued by that service | : 5110830, 5110827 |
| 8. Reason(s) of extension (if applicable) | : Tyre Type Designation added |
| 9. Any remarks | : Reinforced/Extra Load |



Approval number: E4-30R-02101578

Extension number: 03

10. Place : Zoetermeer
11. Date : 05-DEC-2017
12. Signature :



T. H. K. Spatz

13. The list of documents in the approval file which are deposited at the administrative service having delivered the approval and which can be obtained upon request.

- Application form relating to ECE approval for a pneumatic tyre pursuant to Regulation number 30.


-
- The drawing of the tyre's sidewalls, tread and dimensioned cross-section.
 - The test report as mentioned in item 7.

(1) Strike out what does not apply.

(2) A list of Brand name(s)/trademark(s) or Trade description(s)/ Commercial name(s) may be annexed to this communication




The drawing may contain more position numbers than required by UNECE type approval.

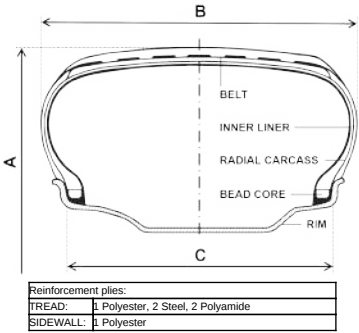


										Design Dimensions (calculated /Annex-5)		
Position	Description	min height	Tire Side	TSL Content	Position	Description	min height	Tire Side	TSL Content	Overall diameter	A (mm)	703
1/194	Brand Name (Trade mark)		both	CONTINENTAL	116	"Inside"/"Outside" marking		SS	OUTSIDE	Section Width	B (mm)	243
2 or 3	Trade description (Commercial name)		both	VikingContact 7	117	"Inside"/"Outside" marking		OSS	INSIDE	Measuring rim	C (Rim Code)	8.0Jx19
4	Tire size designation	>6 (or 9	both	245/45 R 19	134	Date of manufacturing	>4 mm	SS	[WWYY]			
6	Structure	>4 mm	both	RADIAL	179	Alpine Symbol		both	#ALPINE SYMBOL#			
7 or 8	Service description (LI / SSY)	>6 mm	both	102 T	184	Runflat Symbol		both	-			
9 or 10	Additional service description	>6 mm	both		191	"FRT" marking	>4 mm	both	-	Approval No.	E4-30R-02101578	
13 or 14	"M+S" (or "M.S" or "M&S")		both	M+S	135	UN approval mark	>12 mm	both	E4	Extension:	03	
15	Tube type / Tubeless		both	TUBELESS	137	UN R30/R54/R75 approval no.		both	02101578	Name:	D. Schoenfelder	
17	Extra Load or Reinforced	>6 mm	both	EXTRA LOAD						Drawing No.:	1	
19	PSI index	>2 mm	both	-						Date:	11/22/17 5:58 PM	
27	Regroovability		both	-	If Pos 78 is used	Tread depth			-	Pattern	9999.99	
32	"TEMPORARY USE ONLY"	>12,7 mm	both	-		Surface void/ fill ratio			-			
34	"INFLATE TO 420 kPa (60 PSI)"	>12,7 mm	both	-	If Pos 79 is used	Number of circumferential ribs			-			
78	Mark for special use tires	>4 mm	both	-		Number of block-like elements			-			
79	"TRACTION"	>4mm	both	-		Depth of lateral grooves/sipes >=50%of main groove depth?			-			





The drawing may contain more position numbers than required by UNECE type approval.

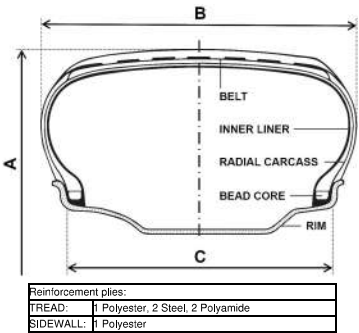


Position	Description	min height	Tire Side	TSL Content
1/194	Brand Name (Trade mark)		both	GISLAVED
2 or 3	Trade description (Commercial name)		both	SOFT*FROST 200
4	Tire size designation	>6 (or 9	both	245/45 R 19
6	Structure	>4 mm	both	RADIAL
7 or 8	Service description (LI / SSY)	>6 mm	both	102 T
9 or 10	Additional service description	>6 mm	both	
13 or 14	"M+S" (or "M.S" or "M&S")		both	M+S
15	Tube type / Tubeless		both	TUBELESS
17	Extra Load or Reinforced	>6 mm	both	EXTRA LOAD
19	PSI index	>2 mm	both	-
27	Regroovability		both	-
32	"TEMPORARY USE ONLY"	>12,7 mm	both	-
34	"INFLATE TO 420 kPa (60 PSI)"	>12,7 mm	both	-
78	Mark for special use tires	>4 mm	both	-
79	"TRACTION"	>4mm	both	-


Position	Description	min height	Tire Side	TSL Content
116	"Inside"/"Outside" marking		SS	OUTSIDE
117	"Inside"/"Outside" marking		OSS	INSIDE
134	Date of manufacturing	>4 mm	SS	[WWYY]
179	Alpine Symbol		both	#ALPINE SYMBOL#
184	Runflat Symbol		both	-
191	"FRT" marking	>4 mm	both	-
135	UN approval mark	>12 mm	both	E4
137	UN R30/R54/R75 approval no.		both	02101578
If Pos 78 is used	Tread depth		-	-
If Pos 79 is used	Surface void/ fill ratio		-	-
If Pos 79 is used	Number of circumferential ribs		-	-
If Pos 79 is used	Number of block-like elements		-	-
If Pos 79 is used	Depth of lateral grooves/sipes >=50%of main groove depth?		-	-

Design Dimensions (calculated / Annex 5)		
Overall diameter	A (mm)	703
Section Width	B (mm)	243
Measuring rim	C (Rim Code)	8.0Jx19
Approval No.	E4-30R-02101578	
Extension:	02	
Name:	D. Schoenfelder	
Drawing No.:	1	
Date:	10/13/17 11:05 AM	
Pattern	3119.61	



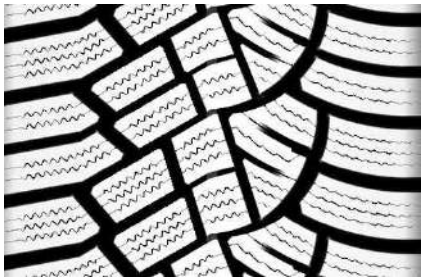

The drawing may contain more position numbers than required by UNECE type approval.

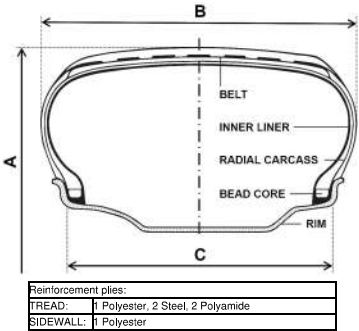

Position	Description	min height	Tire Side	TSL Content
1/194	Brand Name (Trade mark)		both	CONTINENTAL
2 or 3	Trade description (Commercial name)		both	ICECONTACT 2
4	Tire size designation	>6 (or 9	both	245/45 R 19
6	Structure	>4 mm	both	RADIAL
7 or 8	Service description (LI / SSY)	>6 mm	both	102 T
9 or 10	Additional service description	>6 mm	both	
13 or 14	"M+S" (or "M.S" or "M&S")		both	M+S
15	Tube type / Tubeless		both	TUBELESS
17	Extra Load or Reinforced	>6 mm	both	EXTRA LOAD
19	PSI index	>2 mm	both	-
27	Regroovability		both	-
32	"TEMPORARY USE ONLY"	>12,7 mm	both	-
34	"INFLATE TO 420 kPa (60 PSI)"	>12,7 mm	both	-
78	Mark for special use tires	>4 mm	both	-
79	"TRACTION"	>4mm	both	-


Position	Description	min height	Tire Side	TSL Content
116	"Inside"/"Outside" marking		SS	OUTSIDE
117	"Inside"/"Outside" marking		OSS	INSIDE
134	Date of manufacturing	>4 mm	SS	[WWYY]
179	Alpine Symbol		both	#ALPINE SYMBOL#
184	Runflat Symbol		both	-
191	"FRT" marking	>4 mm	both	-
135	UN approval mark	>12 mm	both	E4
137	UN R30/R54/R75 approval no.		both	02101578
If Pos 78 is used	Tread depth			-
	Surface void/ fill ratio			-
If Pos 79 is used	Number of circumferential ribs			-
	Number of block-like elements			-
	Depth of lateral grooves/sipes >=50%of main groove depth?			-

Design Dimensions (calculated / Annex 5)		
Overall diameter	A (mm)	703
Section Width	B (mm)	243
Measuring rim	C (Rim Code)	8.0Jx19
Approval No.	E4-30R-02101578	
Extension:	01	
Name:	D. Schoenfelder	
Drawing No.:	1	
Date:	7/19/17 4:13 PM	
Pattern	3873.03	





The drawing may contain more position numbers than required by UNECE type approval.

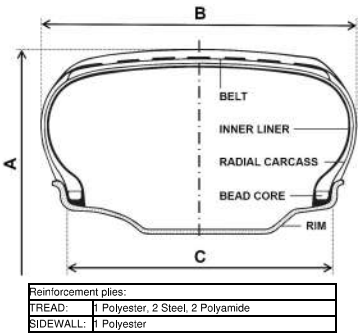

Position	Description	min height	Tire Side	TSL Content
1/194	Brand Name (Trade mark)		both	GISLAVED
2 or 3	Trade description (Commercial name)		both	NORD*FROST 200
4	Tire size designation	>6 (or 9	both	245/45 R 19
6	Structure	>4 mm	both	RADIAL
7 or 8	Service description (LI / SSY)	>6 mm	both	102 T
9 or 10	Additional service description	>6 mm	both	
13 or 14	"M+S" (or "M.S" or "M&S")		both	M+S
15	Tube type / Tubeless		both	TUBELESS
17	Extra Load or Reinforced	>6 mm	both	EXTRA LOAD
19	PSI index	>2 mm	both	-
27	Regroovability		both	-
32	"TEMPORARY USE ONLY"	>12,7 mm	both	-
34	"INFLATE TO 420 kPa (60 PSI)"	>12,7 mm	both	-
78	Mark for special use tires	>4 mm	both	-
79	"TRACTION"	>4mm	both	-

Position	Description	min height	Tire Side	TSL Content
116	"Inside"/"Outside" marking		SS	OUTSIDE
117	"Inside"/"Outside" marking		OSS	INSIDE
134	Date of manufacturing	>4 mm	SS	[WWYY]
179	Alpine Symbol		both	#ALPINE SYMBOL#
184	Runflat Symbol		both	-
191	"FRT" marking	>4 mm	both	-
135	UN approval mark	>12 mm	both	E4
137	UN R30/R54/R75 approval no.		both	02101578
If Pos 78 is used	Tread depth		-	-
	Surface void/ fill ratio		-	-
If Pos 79 is used	Number of circumferential ribs		-	-
	Number of block-like elements		-	-
	Depth of lateral grooves/sipes >=50%of main groove depth?		-	-

Design Dimensions (calculated / Annex 5)		
Overall diameter	A (mm)	703
Section Width	B (mm)	243
Measuring rim	C (Rim Code)	8.0Jx19
Approval No.	E4-30R-02101578	
Extension:	00	
Name:	D. Schoenfelder	
Drawing No.:	1	
Date:	6/9/17 12:35 PM	
Pattern	3059.80	



Company proprietary
Unauthorized duplication prohibited