



RDW

Division Vehicle Regulation & Admission



THE NETHERLANDS
(N E D E R L A N D)



COMMUNICATION

Concerning ⁽¹⁾ :

- ~~- approval granted~~
- approval extended
- ~~- approval refused~~
- ~~- approval withdrawn~~
- ~~- production definitely discontinued~~

of a type of tyre for motor vehicles pursuant to Regulation number 30.


Approval number: E4*30R02/20*102955*02

1. Manufacturer's name and address : Continental Reifen Deutschland GmbH
Vahrenwalder Str. 9
30165 Hannover
Germany
2. Tyre type designation ⁽²⁾
 - 2.1 Brand-name(s)/trademark(s) : CONTINENTAL, GISLAVED
 - 2.2 Trade description(s)/Commercial name(s) : GISLAVED, SOFT*FROST 200
GISLAVED, NORD*FROST 200
CONTINENTAL, ICECONTACT 2
CONTINENTAL, CONTIVIKINGCONTACT 6
CONTINENTAL, VikingContact 7
CONTINENTAL, IceContact 3
3. If applicable, name and address of the manufacturer's representative : not applicable
4. Summarized description
 - 4.1 Tyre size designation : 255/55 R 18
 - 4.2 Category of use : ~~normal~~ / snow / ~~special use~~ / ~~temporary use~~ ⁽¹⁾
 - 4.3 Structure : ~~diagonal~~ / ~~bias belted~~ / radial / ~~run-flat tyre~~ ⁽¹⁾
 - 4.4 Speed category symbol : T
 - 4.5 Load-capacity index : 109
5. Technical Service and, where applicable, test laboratory approved for purposes of approval or of verification of conformity : Continental Reifen Deutschland GmbH
Vahrenwalder Str. 9
30165 Hannover
Germany
6. Date of report issued by that service : 03.07.2017, 06.07.2017
7. Number of report issued by that service : 5156443, 5156442



Approval number: E4*30R02/20*102955*02

8. Reason(s) of extension (if applicable) : Tyre Type Designation added
9. Any remarks : Reinforced/Extra Load
10. Place : Zoetermeer
11. Date : 13-NOV-2018
12. Signature :

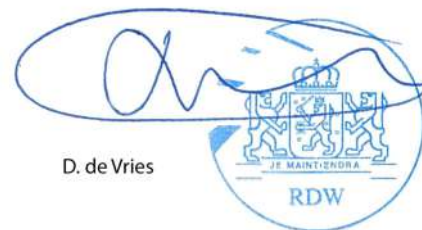

13. The list of documents in the approval file which are deposited at the administrative service having delivered the approval and which can be obtained upon request.

- Application form relating to ECE approval for a pneumatic tyre pursuant to Regulation number 30.


-
- The drawing of the tyre's sidewalls, tread and dimensioned cross-section.
 - The test report as mentioned in item 7.

⁽¹⁾ Strike out what does not apply.

⁽²⁾ A list of Brand name(s)/trademark(s) or Trade description(s)/ Commercial name(s) may be annexed to this communication

Serial Side (SS)

Off Serial Side (OSS)

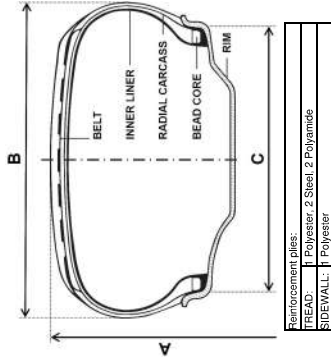

The drawing may contain more position numbers than required by UNECE type approval.



Position	Description	min height	Tire Side	TSL Content	Position	Description	min height	Tire Side	TSL Content
1/194	Brand Name (Trade mark)		both	CONTINENTAL	116	"Inside"/"Outside" marking		SS	OUTSIDE
2 or 3	Trade description (Commercial name)		both	IceContact 3	117	"Inside"/"Outside" marking		OSS	INSIDE
4	Tire size designation	>6 (or 9	both	255/55 R 18	134	Date of manufacturing	>4 mm	SS	[WWYY]
6	Structure	>4 mm	both	RADIAL	179	Alpine Symbol		both	#ALPINE SYMBOL#
7 or 8	Service description (LI / SSV)	>6 mm	both	109 T	184	Runflat Symbol		both	-
9 or 10	Additional service description	>6 mm	both		191	"FRT" marking	>4 mm	both	-
13 or 14	"M+S" (or "M.S" or "M&S")		both	M+S	135	UN approval mark	>12 mm	both	E4
15	Tube type / Tubeless		both	TUBELESS	137	UN R30/R54/R75 approval no.		both	02102955
17	Extra Load or Reinforced	>6 mm	both	EXTRA LOAD	If Pos 78 is used				
19	PSI index	>2 mm	both						
27	Regroovability		both						
32	"TEMPORARY USE ONLY"	>12.7 mm	both		If Pos 79 is used				
34	"INFLATE TO 420 kPa (60 PSI)"	>12.7 mm	both						
73	Test inflation Pressure in kPa	>2 mm	both						
78	Mark for special use tires	>4 mm	both		Depth of lateral grooves/sipes >=50% of main groove depth?				
79	"TRACTION"	>4mm	both						

Design Dimensions (calculated / Annex 5)			
Overall diameter	A (mm)	737	
Section Width	B (mm)	265	
Measuring rim	C (Rim Code)	8.0Jx18	
Approval No.	E4*30R02/20*102955*02		
Name:	D. Schoenfelder		
Drawing No.:	1		
Date:	11/5/18 3:42 PM		
Pattern	4789.03.01		

Continental




Company proprietary
Unauthorized duplication prohibited

Serial Side (SS)

Off Serial Side (OSS)



The drawing may contain more position numbers than required by UNECE type approval.

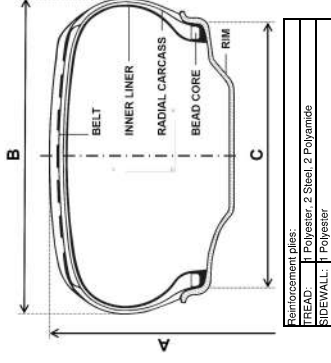

Position	Description	min height	Tire Side	TSL Content	Position	Description	min height	Tire Side	TSL Content
1/194	Brand Name (Trade mark)		both	CONTINENTAL	116	"Inside"/"Outside" marking		SS	OUTSIDE
2 or 3	Trade description (Commercial name)		both	VikingContact 7	117	"Inside"/"Outside" marking		OSS	INSIDE
4	Tire size designation	>6 (or 9	both	255/55 R 18	134	Date of manufacturing	>4 mm	SS	[WWYY]
6	Structure	>4 mm	both	RADIAL	179	Alpine Symbol		both	#ALPINE SYMBOL#
7 or 8	Service description (LI / SSY)	>6 mm	both	109 T	184	Runflat Symbol		both	-
9 or 10	Additional service description	>6 mm	both		191	"FRT" marking	>4 mm	both	-
13 or 14	"M+S" (or "M.S" or "M&S")		both	M+S	135	UN approval mark	>12 mm	both	E4
15	Tube type / Tubeless		both	TUBELESS	137	UN R30/R54/R75 approval no.		both	02102955
17	Extra Load or Reinforced	>6 mm	both	EXTRA LOAD	If Pos 78 is used				
19	PSI index	>2 mm	both		Tread depth				
					Surface void/ fill ratio				
					Pattern				
					Date: 8/25/17 5:13 PM				
					9999.99				


Design Dimensions (calculated / Annex 5)			
Overall diameter	A (mm)		737
Section Width	B (mm)		265
Measuring rim	C (Rim Code)		8.0Jx18
Approval No.	E4-30R-02102955		
Extension:	01		
Name:	D. Schoenfelder		
Drawing No.:	1		
Date:	8/25/17 5:13 PM		
Pattern	9999.99		

Continental


Company proprietary
Unauthorized duplication prohibited

Serial Side (SS)

Off Serial Side (OSS)

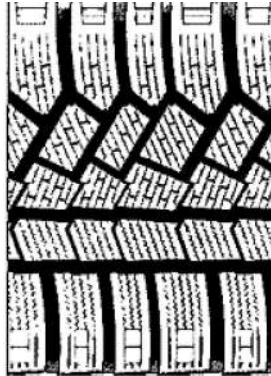

The drawing may contain more position numbers than required by UNECE type approval.

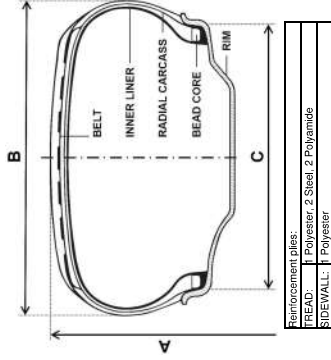


Position	Description	min height	Tire Side	TSL Content	Position	Description	min height	Tire Side	TSL Content	Design Dimensions (calculated / Annex-5)
1/194	Brand Name (Trade mark)		both	GISLAVED	116	"Inside"/"Outside" marking		SS	OUTSIDE	Overall diameter A (mm) 737
2 or 3	Trade description (Commercial name)		both	GISLAVED SOFT*FROST 200	117	"Inside"/"Outside" marking		OSS	INSIDE	Section Width B (mm) 265
4	Tire size designation	>6 (or 9)	both	255/55 R 18	134	Date of manufacturing	>4 mm	SS	[WWYY]	Measuring rim C (Rim Code) 8.0Jx18
6	Structure	>4 mm	both	RADIAL	179	Alpine Symbol		both	#ALPINE SYMBOL#	
7 or 8	Service description (LI / SSY)	>6 mm	both	109T	184	Runflat Symbol		both	-	
9 or 10	Additional service description	>6 mm	both		191	"FRT" marking	>4 mm	both	-	
13 or 14	"M+S" (or "M.S" or "M&S")		both	M-S	135	UN approval mark	>12 mm	both	E4	Approval No. E4-30R-02102955
15	Tube type / Tubeless		both	TUBELESS	137	UN R30/R54/R75 approval no.		both	02102955	Extension: 00
17	Extra Load or Reinforced	>6 mm	both	EXTRA LOAD						Name: D. Schoenfelder
19	PSI index	>2 mm	both							Drawing No.: 1
27	Regroovability		both							Date: 7/19/17 9:46 AM
32	"TEMPORARY USE ONLY"	>12.7 mm	both							Pattern 3088.01
34	"INFLATE TO 420 kPa (60 PSI)"	>12.7 mm	both							
78	Mark for special use tires	>4 mm	both							
79	"TRACTION"	>4mm	both							

Continental



Company proprietary
Unauthorized duplication prohibited

Serial Side (SS)

Off Serial Side (OSS)



The drawing may contain more position numbers than required by UNECE type approval.


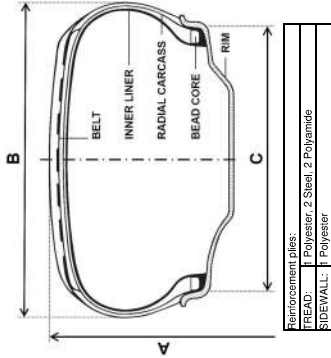


Position 1/194 2 or 3	Description Brand Name (Trade mark) Trade description (Commercial name)	min height	Tire Side	TSL Content GISLAVED GISLAVED NORD*FROST 200	Position	Description "Inside"/"Outside" marking "Inside"/"Outside" marking Date of manufacturing Alpine Symbol Runflat Symbol "FRT" marking UN approval mark UN R30/R54/R75 approval no.	min height	Tire Side	TSL Content OUTSIDE INSIDE [WWYY] #ALPINE SYMBOL#	Design Dimensions (calculated / Annex 57)		
										Overall diameter	A (mm)	737
										Section Width	B (mm)	265
										Measuring rim	C (Rim Code)	8.0Jx18
4	Tire size designation	>6 (or 9	both	255/55 R 18	179		both			Approval No.: E4-30R-02102955 Extension: 00 Name: D. Schoenfelder Drawing No.: 2 Date: 7/19/17 9:46 AM Pattern 3488.01		
6	Structure	>4 mm	both	RADIAL	184		both					
7 or 8	Service description (LI / SSV)	>6 mm	both	109T	191	"FRT" marking	>4 mm	both				
9 or 10	Additional service description	>6 mm	both		135	UN approval mark	>12 mm	both				
13 or 14	"M+S" (or "M.S" or "M&S")		both	M+S	137	UN R30/R54/R75 approval no.	both	02102955				
15	Tube type / Tubeless		both	TUBELESS								
17	Extra Load or Reinforced	>6 mm	both	EXTRA LOAD	If Pos 78 is used	Tread depth	-					
19	PSI index	>2 mm	both			Surface void/ fill ratio	-					
27	Regroovability		both	-	If Pos 79 is used	Number of circumferential ribs	-					
32	"TEMPORARY USE ONLY"	>12,7 mm	both	-		Number of block-like elements	-					
34	"INFLATE TO 420 kPa (60 PSI)"	>12,7 mm	both	-		Depth of lateral grooves/sipes >=50% of main groove depth?	-					
78	Mark for special use tires	>4 mm	both									
79	"TRACTION"	>4mm	both	-								

Continental



The drawing may contain more position numbers than required by UNECE type approval.


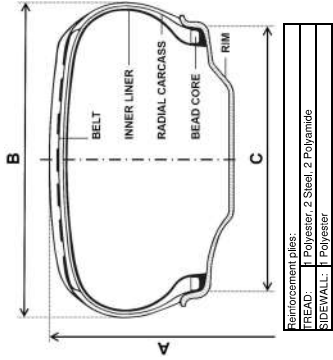


Position		Description	min height	Tire Side	TSL Content	Design Dimensions			(calculated / Annex-57)				
1/194	Brand Name (Trade mark)			both	CONTINENTAL	Position	Description	min height	Tire Side	TSL Content	Overall diameter	A (mm)	737
2 or 3	Trade description (Commercial name)			both	CONTINENTAL IOECONTACT 2	116	"Inside"/"Outside" marking		SS	OUTSIDE	Section Width	B (mm)	265
						117	"Inside"/"Outside" marking		OSS	INSIDE	Measuring rim	C (Rim Code)	8.0Jx18
4	Tire size designation		>6 (or 9	both	255/55 R 18	134	Date of manufacturing	>4 mm	SS	[WWYY]			
6	Structure		>4 mm	both	RADIAL	179	Alpine Symbol		both	#ALPINE SYMBOL#			
7 or 8	Service description (LI / SSY)		>6 mm	both	109T	184	Runflat Symbol		both	-			
9 or 10	Additional service description		>6 mm	both		191	"FRT" marking	>4 mm	both	-			
13 or 14	"M+S" (or "M.S" or "M&S")			both	M-S	135	UN approval mark	>12 mm	both	E4	Approval No.	E4-30R-02102955	
15	Tube type / Tubeless			both	TUBELESS	137	UN R30/R54/R75 approval no.		both	02102955	Extension:	00	
17	Extra Load or Reinforced		>6 mm	both	EXTRA LOAD	If Pos 78 is used							
19	PSI index		>2 mm	both									
27	Regroovability			both									
32	"TEMPORARY USE ONLY"		>12,7 mm	both		If Pos 79 is used							
34	"INFLATE TO 420 kPa (60 PSI)"		>12,7 mm	both									
78	Mark for special use tires		>4 mm	both									
79	"TRACTION"		>4mm	both		Depth of lateral grooves/sipes >=50% of main groove depth?							
						Tread depth							
						Surface void/ fill ratio							
						Number of circumferential ribs							
						Number of block-like elements							
						Depth of lateral grooves/sipes >=50% of main groove depth?							
						Approval No.							
						Extension:							
						Name:							
						Drawing No.:							
						Date:							
						Pattern							
						Approval No.							
						Extension:							
						Name:							
						Drawing No.:							
						Date:							
						Pattern							

Continental



The drawing may contain more position numbers than required by UNECE type approval.

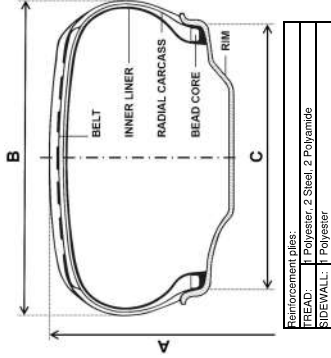

Position	Description	min height	Tire Side	TSL Content	Position	Description	min height	Tire Side	TSL Content	Design Dimensions (calculated / Annex-5)
1/194	Brand Name (Trade mark)		both	CONTINENTAL	116	"Inside"/"Outside" marking		SS	OUTSIDE	Overall diameter A (mm) 737
2 or 3	Trade description (Commercial name)		both	CONTINENTAL CONTINUINGCONTACT 6	117	"Inside"/"Outside" marking		OSS	INSIDE	Section Width B (mm) 265
4	Tire size designation	>6 (or 9	both	255/55 R 18	134	Date of manufacturing	>4 mm	SS	[WWYY]	Measuring rim C (Rim Code) 8.0Jx18
6	Structure	>4 mm	both	RADIAL	179	Alpine Symbol		both	#ALPINE SYMBOL#	
7 or 8	Service description (LI / SSY)	>6 mm	both	109T	184	Runflat Symbol		both	-	
9 or 10	Additional service description	>6 mm	both		191	"FRT" marking	>4 mm	both	-	
13 or 14	"M+S" (or "M.S" or "M&S")		both	M-S	135	UN approval mark	>12 mm	both	E4	Approval No. E4-30R-02102955
15	Tube type / Tubeless		both	TUBELESS	137	UN R30/R54/R75 approval no.		both	02102955	Extension: 00
17	Extra Load or Reinforced	>6 mm	both	EXTRA LOAD		Tread depth				Name: D. Schoenfelder
19	PSI index	>2 mm	both		If Pos 78 is used	Surface void/ fill ratio				Drawing No.: 4
27	Regroovability		both		If Pos 79 is used	Number of circumferential ribs				Date: 7/19/17 9:46 AM
32	"TEMPORARY USE ONLY"	>12.7 mm	both			Number of block-like elements				Pattern 3726.01
34	"INFLATE TO 420 kPa (60 PSI)"	>12.7 mm	both			Depth of lateral grooves/sipes >=50% of main groove depth?				
78	Mark for special use tires	>4 mm	both							
79	"TRACTION"	>4mm	both							