




FlexScan®
Business Monitor Solutions

CHOOSE EIZO





CHOOSE EIZO WORK BETTER

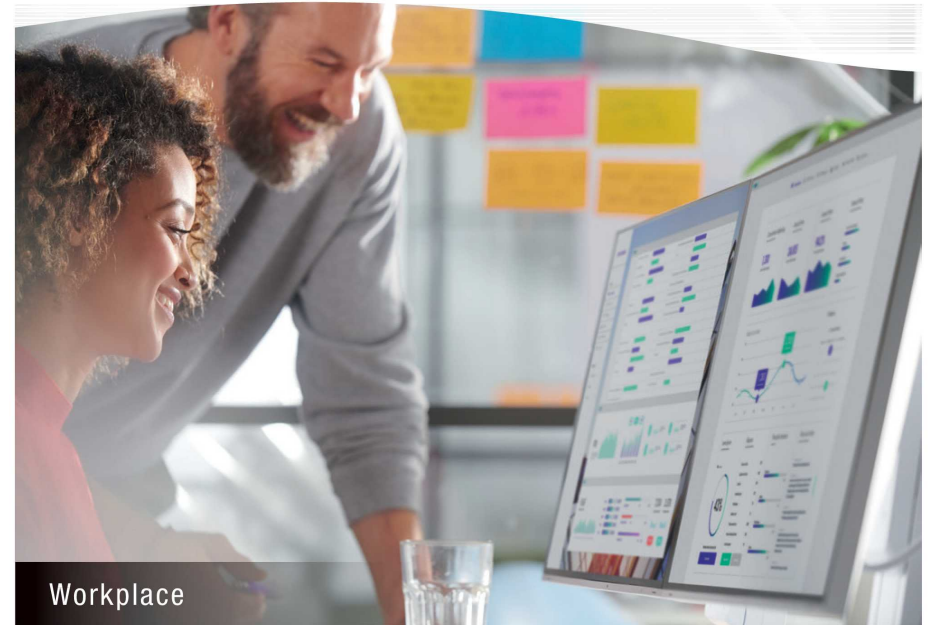

Workplace



Home Office

The FlexScan Solution for a Better Working Experience

Premium				New Standard			Basic						
I need a stable network connection for web meetings See page 7 I need to use multiple monitors with less cable clutter See page 6													
Having my battery always fully charged allows me to focus on work See page 7													
I prefer to work with an external mouse and keyboard when using my laptop See page 7							I'm using a desktop PC and need a good monitor						
Eye care and ergonomics are important to me										See pages 10 - 12			
I want to brighten the office to improve the ambience										See pages 8 - 9			
Inputs	USB Type-C®	✓	✓	✓	✓	✓	✓						
	• Network Connection	✓	✓	✓									
	• Daisy Chain		✓	✓									
	• Power Delivery	✓	✓	✓	✓	✓	✓						
	• Connect Peripherals	✓	✓	✓	✓	✓	✓						
	DisplayPort	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓
	HDMI	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓
	DVI-D								✓	✓	✓		
	D-Sub									✓	✓	✓	✓
Eye Care Functions		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Color / Frameless		□ White ■ Black	□ White ■ Black	□ White ■ Black	□ White ■ Black	□ White ■ Black	□ White ■ Black	□ White ■ Black	□ White ■ Black	□ White ■ Black	□ White ■ Black	□ White ■ Black	□ White ■ Black
USB Ports		4	4	4	2	2	4	4	4	2	4	2	2
Panel Size		37.5"	27"	24.1"	31.5"	27"	23.8"	27"	24.1"	24.1"	23.8"	23.8"	22.5"
Native Resolution		UWQHD+ 3840×1600	WQHD 2560×1440	WUXGA 1920×1200	4K 3840×2160	4K 3840×2160	Full HD 1920×1080	WQHD 2560×1440	WUXGA 1920×1200	WUXGA 1920×1200	Full HD 1920×1080	Full HD 1920×1080	WUXGA 1920×1200
		NEW  EV3895	NEW  EV2795	NEW  EV2495	 EV3285	 EV2785	NEW  EV2480	 EV2760	 EV2457	 EV2456	 EV2460	 EV2451	 EV2360

See pages 18 - 21 for a detailed list and specifications of the complete FlexScan lineup, including square and wide monitors.

Streamlined Connection with USB Type-C



Power Delivery

Power delivery via USB Type-C reliably charges laptops and small desktop PCs. This eliminates the need for a laptop's bulky power supply unit, freeing up desk space.

Compatible Models EV3895 / EV2795 / EV2495 / EV3285 / EV2785 / EV2480



A Better Working Experience

USB Type-C compatible monitors make it faster and easier to connect a laptop when moving between workstations, or when working away from the office.



Visit Our Website

Infographic: "What is USB Type-C?"



Daisy Chain

With a daisy chain users can connect multiple monitors via a single video signal output. Connecting monitors in daisy chain simplifies cable management, tidying up the back of the desk for an even cleaner office aesthetic.

Compatible Models EV2795 / EV2495



Visit Our Website

What do I need to know about daisy chaining?



Network Connection

While many modern laptops are not equipped with a dedicated LAN port, a USB Type-C compatible monitor with a built-in LAN adapter provides users with access to the network via the monitor. This allows users to conduct conference calls or data transfers reliably and at high speed.

Compatible Models EV3895 / EV2795 / EV2495



Connect Peripherals

Laptops often have limited connectivity options for peripherals. Connecting to a USB Type-C compatible monitor gives access to a hub with multiple USB Type-A ports for easily connecting an external keyboard, mouse, web camera, or storage device.

Compatible Models EV3895 / EV2795 / EV2495 / EV3285 / EV2785 / EV2480



Bask in Beauty




Frameless

Bezels that are Barely There

These monitors are virtually frameless. Even with the black borders along the perimeter of the LCD there is very little distance between the display area of each screen in a multi-monitor configuration which makes for almost seamless viewing.

Minimalist Front Surface Design

EIZO's no-compromises approach to design and functionality ensures the switches on the front of the monitor are easy to operate. Even with the minimalist front bezel, we achieved frameless design which incorporates an auto brightness sensor along with power and setting control switches by miniaturizing all these components.



Visualize your Workspace with AR

Scan the QR code using your iPhone or iPad to see how EIZO fits into your workspace with augmented reality.



EV3895



EV2795



EV2495

A Natural Beauty

Reducing the use of volatile organic compounds (VOCs) found in material production, such as some paints, is a global concern. EIZO uses its expertise cultivated from extensive years of research to manufacture its monitor cabinets with a smooth, uniform color and texture without using paint.



Elegant from Front to Back

White Cables for a White Cabinet

The aesthetically-pleasing design of the monitor extends to the cables. White cables come bundled with the white cabinet option for full color coordination.

Cable Management

To keep your desktop tidy, a cable holder and/or a cable cover are included.






Say Goodbye to Tired Eyes

Blue Light Reduction

Paper Mode

Do you find that your screen is often too bright to read text comfortably? FlexScan monitors are equipped with Paper Mode which reduces blue light to simulate paper, making it less straining on your eyes. When used in conjunction with the Auto EcoView function, blue light is even further reduced.


- Brightness
- Contrast Ratio
- + Low Color Temperature

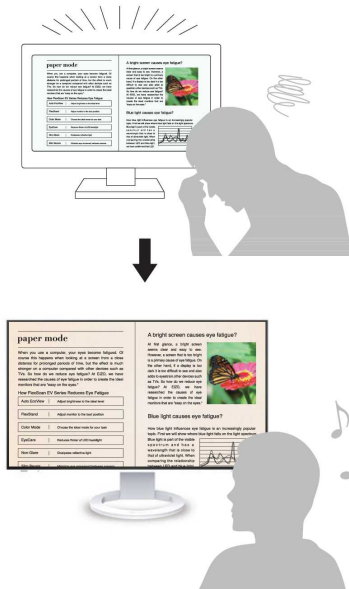

Auto Brightness Control

Always the Ideal Brightness

The Auto EcoView function automatically adjusts the brightness of your monitor according to ambient lighting. This ensures your monitor is always at the optimal brightness for reducing eye fatigue.

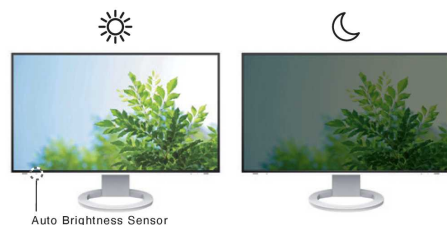

Flicker-Free Viewing

EyeCare Dimming Mode

In low brightness ranges, users may perceive flicker on a typical LED backlight, causing eye fatigue and often headaches. EyeCare is a dimming function that cuts flicker to a degree that human eyes cannot detect, reducing eye fatigue and flicker-related headaches, without affecting color stability of the monitor.

FlexScan monitors are certified by TÜV Rheinland to have low blue light and be flicker-free.



Stable Image Even at Low Brightness

Reduce Brightness to Approximately 1 cd/m²



Frameless and wide monitors can be adjusted to a brightness of approximately 1 cd/m² without negatively impacting the color or stability of the screen.



Glare Reduction

Anti-Glare Coating

FlexScan monitors are treated with an anti-glare coating to reduce screen reflections caused by ambient lighting. The coating scatters incoming light, reducing the amount of light reflected into your eyes.

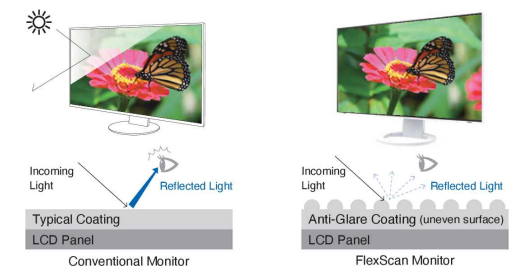

The Perfect Position




Versatile Stand

The stands feature height adjustment, tilt and swivel, while saving space and remaining stylish. Quickly and smoothly adjust your monitor to the perfect position.

The specific movement ranges of stands varies by model. See pages 18 - 21 for specifications of all monitors.


■ EV2795

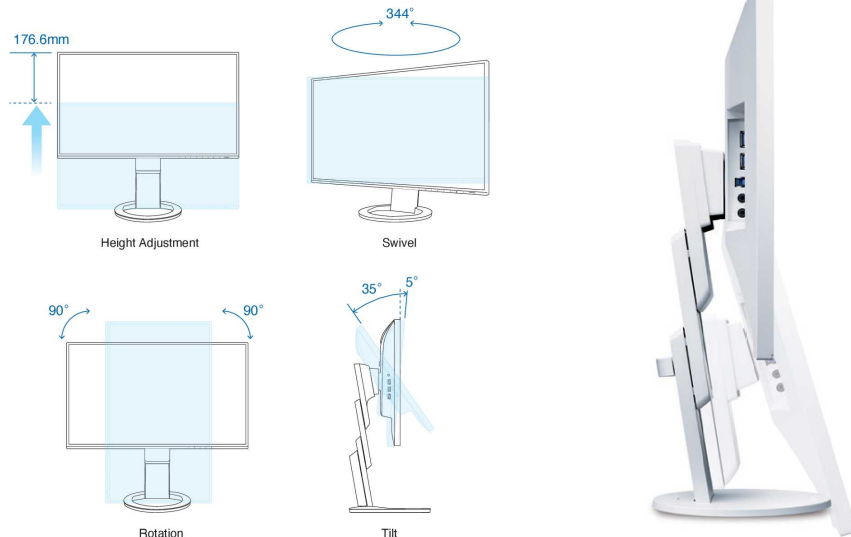

Wide Height Adjustment Range

The ergonomic stand allows you to adjust the monitor to the most comfortable position suited for the workplace or home office.


The specific movement ranges of stands varies by model. See pages 18 - 21 for specifications of all monitors.

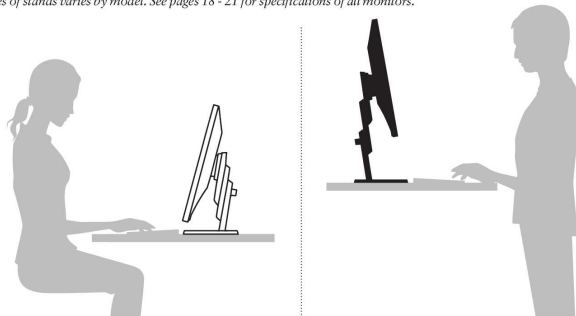

Space-Saving Positioning

For the most limited workspaces, a laptop can fit comfortably under the monitor with the stand at maximum height. This allows you to use the laptop as a second screen without taking up valuable desktop space.


■ EV2480

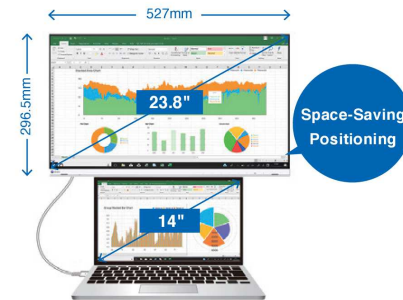

Portrait Mode

View web pages and documents more easily by switching the monitor to portrait mode simply by rotating the screen.

The specific movement range of stands varies by model. See pages 18 - 21 for specifications of all monitors.

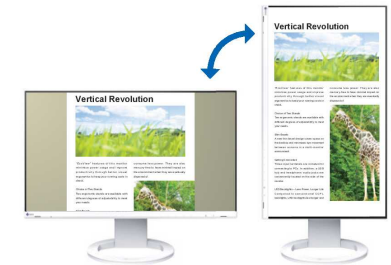


Free Up Your Workspace

The PCSK-03 / PCSK-03R is a VESA-compliant bracket for easily mounting a client terminal such as a thin client or mini PC to the back of the monitor's stand. The space the client terminal previously occupied is now freed up so you can make better use of your desktop.

Even with the client terminal attached you can adjust the monitor's stand freely.

Please check EIZO website for supported models.

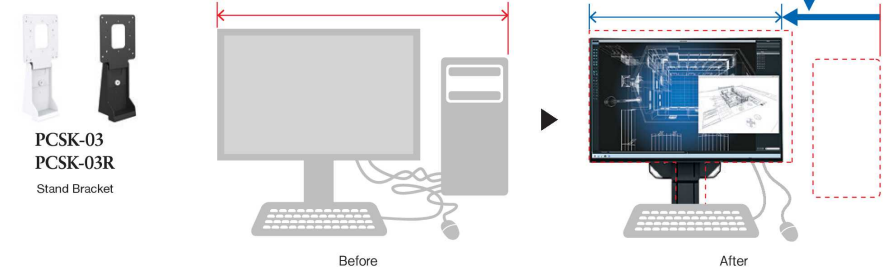

The stand has been tested with several companies' client terminals. When installed correctly the bracket does not interfere with the balance of the monitor so that even a heavy client terminal will not cause your monitor to overbalance.




Intelligent Software to Work Better

SCREEN INSTYLE

EIZO's free Screen InStyle software automatically optimizes your monitor to make your user environment more comfortable.

See pages 18 - 21 for compatible monitors.

Compatible OS Windows 10 / 8.1

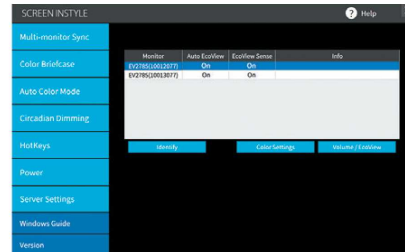

Automatically Change the Color Mode for Each Application

Auto Color Mode


FlexScan monitors have multiple color modes designed for different uses. Use the Auto Color Mode to assign a color mode to turn on when using specific applications such as those for writing documents, photo viewing, creating illustrations or watching movies. When an application is opened the screen will automatically switch to the assigned color mode, making manual switching unnecessary.



Take Your Settings with You

Color Briefcase


This function allows you to effortlessly maintain your individual screen preferences and take them with you, even to different monitors. Your settings are automatically reflected simply by connecting your laptop to a monitor supported by Screen InStyle. This is useful in environments with hot-desking or shared workspaces, providing enhanced comfort and work efficiency.

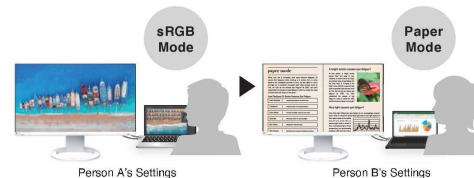

Easily Switch Between Inputs / Color Modes

Assign Hotkeys for Switching Input Signals and Color Modes


You can assign keyboard hotkeys to switch between color modes or input signals of two PCs connected to your monitor.



Multi-Monitor Convenience


Synchronize Screen Adjustments

When using multiple monitors, save time by synchronizing all the monitors with each other. If you change the color mode, brightness or color temperature of one monitor, the rest will automatically change to the same.

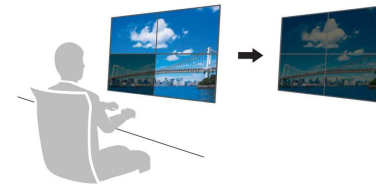

On/Off All at Once

When one monitor's power is turned off, all other monitors will also turn off. Save energy by easily turning off all monitors at once.

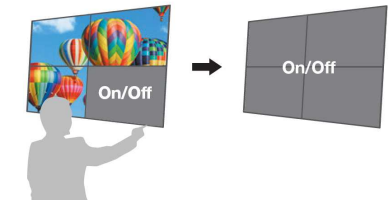


Screen InStyle Server

Effectively Monitor Asset Management

Automatically Receive Monitor or PC Information

With Screen InStyle Server receive information such as the model name and serial number of any monitor connected to your network. Additionally, see information from the computer that each monitor is connected to, such as the OS, IP address and computer name.



Control Settings on Multiple Monitors at Once

Manage Multiple Monitors from One Location


Control multiple monitors' settings such as color mode, brightness, and eco functions from a remote location. Furthermore, prevent unintended setting changes by locking the operation switch.

Conserve Power with Central Management

Manage various power settings of networked PCs and monitors. Set the monitor to turn off or the PC to sleep after a set period of inactivity.

Improve Security with Automatic Locking

Improve office security by setting networked PCs to automatically lock after a certain period of inactivity. This ensures the PC remains secure after the user leaves their desk.



Download Screen InStyle and Screen InStyle Server



Care for the Environment

Our Contribution to SDGs

As part of its corporate social responsibility (CSR) activities, EIZO is contributing towards the United Nations' Sustainable Development Goals (SDGs). FlexScan are environmentally friendly monitors that are built with continually improved energy efficiency, made using recycled plastics and sustainable procured materials, boxed in recyclable packaging, and supported by a responsible after-service recycling system.

Major activities:

- Increased the usage ratio of recycled plastics
- Increased the usage ratio of recycled materials in packaging
- Conducted a Life Cycle Assessment (LCA) of the FlexScan EV series
- Obtained ISO 50001 environmental management system certification



Visit Our Website

More on EIZO's CSR activities in the Integrated Report >>>



Major Sustainability Standards

EIZO's FlexScan frameless monitors are certified by worldwide comprehensive sustainability certifications such as EnergyStar, EPEAT, and TCO Certified Generation 8. This provides evidence to companies that need to verify conformance with their own procurement requirements according to ESG (environmental, social, and governance) investment or SDGs policy.



Automatically Reduce Power Consumption

Brightness Control with Auto EcoView

Auto EcoView automatically controls the brightness of the monitor to match ambient lighting. No more fiddling with brightness settings throughout the day, simply turn Auto EcoView on and save power while maintaining optimal visibility.



Control the Backlight with EcoView Optimizer 2

Save more power with EcoView Optimizer 2, which reduces the brightness of the backlight according to the content being displayed, all while maintaining maximum visibility.

Excludes EV2730Q, S1934, S1703-A, and S1503-A.



Eco-Friendly Packing Customization

EIZO offers corporate customers an option for collective packing, where multiple monitors can be packed together in a single box. This lowers environmental impact by reducing packing materials used for a single shipment.



Warranty and Accessories

Warranty

Five-Year Warranty

A 5-year manufacturer's warranty covers all components including the LCD panel to ensure a long service life.



Zero Bright Pixels

EIZO guarantees zero bright sub-pixels for six months from the purchase date.

See pages 18 - 21 for applied models.



Accessories

Please check the EIZO website for supported models.

Wall Mount Arm

The LA-011-W is a single-axis arm with a minimum profile and tilt/swivel.



Protection Panels

These panels protect against dust and scratches. They come in reversible glossy and anti-glare sides.








Screen Cleaner Kit

Keep your screen free from dust and fingerprints with this screen cleaner kit. Includes pump spray and cloth.




FlexScan

FlexScan®			Basic			Wide
			EV2460	EV2451	EV2360	EV2430
Model Variations	With Stand	Black Gray	EV2460-BK -	EV2451-BK -	EV2360-BK -	EV2430-BK EV2430-GY
	Without Stand	White Black Gray White	EV2460-WT EV2460-FBK -	EV2451-WT EV2451-FBK -	EV2360-WT EV2360-FBK -	- EV2430-FBK EV2430-FGY -
Panel	Type	EV2460-FWT	EV2451-FWT	EV2360-FWT	-	
	Backlight	IPS	IPS	IPS	IPS	
Video Signals	Size	LED	LED	LED	LED	
	Native Resolution	23.8" / 60.5 cm	23.8" / 60.4 cm	22.5" / 57.2 cm	24.1" / 61.1 cm	
	Viewable Image Size (H x V)	1920 x 1080 (16: 9 aspect ratio)	1920 x 1080 (16: 9 aspect ratio)	1920 x 1200 (16:10 aspect ratio)	1920 x 1200 (16:10 aspect ratio)	
	Pixel Pitch / Pixel Density	527 x 296.5 mm	527 x 296.5 mm	488.2 x 297.2 mm	518.4 x 324 mm	
	Display Colors	0.275 x 0.275 mm / 93 ppi	0.275 x 0.275 mm / 93 ppi	0.254 x 0.248 mm / 101 ppi	0.270 x 0.270 mm / 94 ppi	
	Brightness (typ.)	16.77 million	16.77 million	16.77 million	16.77 million	
	Viewing Angles (H / V, typ.)	178° / 178°	178° / 178°	178° / 178°	178° / 178°	
	Brightness (typ.)	250 cd/m ²	250 cd/m ²	300 cd/m ²	300 cd/m ²	
	Contrast Ratio (typ.)	1000:1	1000:1	1000:1	1000:1	
	Response Time (typ.)	5 ms (gray-to-gray)	5 ms (gray-to-gray)	5 ms (gray-to-gray)	14 ms (gray-to-gray)	
Input Terminals	DisplayPort (HDCP 1.3), HDMI (HDCP 1.4), DVI-D (HDCP 1.4), D-Sub mini 15 pin	DisplayPort (HDCP 1.3), HDMI (HDCP 1.4), DVI-D (HDCP 1.4), D-Sub mini 15 pin	DisplayPort (HDCP 1.3), HDMI (HDCP 1.4), DVI-D (HDCP 1.4), D-Sub mini 15 pin	DisplayPort (HDCP 1.3), HDMI (HDCP 1.4), D-Sub mini 15 pin	DisplayPort (HDCP 1.3), DVI-D (HDCP 1.4), D-Sub mini 15 pin	
	Output Terminals	-	-	-	-	
Digital Scanning Frequency (H / V)	DisplayPort: 31 - 68 kHz / 59 - 61 Hz HDMI: 15 - 68 kHz / 49 - 51, 59 - 61 Hz DVI: 31 - 68 kHz / 59 - 61 Hz	DisplayPort: 31 - 68 kHz / 59 - 61 Hz HDMI: 15 - 68 kHz / 49 - 51 Hz, 59 - 61 Hz DVI: 31 - 68 kHz / 59 - 61 Hz	DisplayPort: 31 - 75.5 kHz / 59 - 61 Hz HDMI: 15 - 68 kHz / 49 - 51 Hz, 59 - 61 Hz DVI: 31 - 75.5 kHz / 49 - 51 Hz, 59 - 61 Hz	DisplayPort: 31 - 76 kHz / 59 - 61 Hz		
	Analog Scanning Frequency (H / V)	31 - 68 kHz / 59 - 61 Hz	31 - 81 kHz / 55 - 76 Hz	31 - 75.5 kHz / 59 - 61 Hz	31 - 76 kHz / 55 - 61 Hz	
Sync Formats	Separate	Separate	Separate	Separate		
	Upstream	USB 3.1 Gen 1: Type-B	USB 3.1 Gen 1: Type-B	USB 3.1 Gen 1: Type-B	USB 2.0: Type-B	
Downstream	USB 3.1 Gen 1: Type-A x 4	USB 3.1 Gen 1: Type-A x 2	USB 3.1 Gen 1: Type-A x 2	USB 2.0: Type-A x 2		
	USB LAN Adapter	-	-	-	-	
Speakers	1.0 W + 1.0 W	1.0 W + 1.0 W	1.0 W + 1.0 W	1.0 W + 1.0 W		
	Output Terminals	Headphones (Stereo mini jack)	Headphones (Stereo mini jack)	Headphones (Stereo mini jack)	Headphones (Stereo mini jack)	
Power Requirements	AC 100 - 240 V, 50 / 60 Hz	AC 100 - 240 V, 50 / 60 Hz	AC 100 - 240 V, 50 / 60 Hz	AC 100 - 240 V, 50 / 60 Hz		
	Typical Power Consumption	10 W	13 W	11 W	12 W	
Maximum Power Consumption	50 W	42 W	37 W	36 W		
	Power Save Mode	0.5 W or less	0.5 W or less	0.5 W or less	0.3 W or less	
Preset Modes	User1, User2, sRGB, Paper, Movie, DICOM	User1, User2, sRGB, Paper, Movie, DICOM	User1, User2, sRGB, Paper, Movie, DICOM	User1, User2, sRGB, Paper, Movie, DICOM		
	Auto EcoView	Yes	Yes	Yes	Yes	
Dimensions (Landscape, W x H x D)	537.8 x 333.6 - 473.6 x 233 mm	537.7 x 322.7 - 495.4 x 190 mm	499 x 333.9 - 473.9 x 233 mm	552.5 x 368 - 499 x 233 mm		
	Dimensions (Without Stand, W x H x D)	537.8 x 320.4 x 53.6 mm	537.7 x 313.1 x 45.5 mm	499 x 321.3 x 53.6 mm	552.5 x 358 x 56.9 mm	
Net Weight	5.9 kg	5.5 kg	5.5 kg	6.7 kg		
	Net Weight (Without Stand)	3.8 kg	3.5 kg	3.4 kg	4.3 kg	
Height Adjustment Range	140 mm	172.7 mm	140 mm	131 mm		
	Tilt	35° Up, 5° Down	35° Up, 5° Down	35° Up, 5° Down	35° Up, 5° Down	
Swivel	344°	344°	344°	344°		
	Pivot	90° (both clockwise and counter clockwise)	90° (both clockwise and counter clockwise)	90° (both clockwise and counter clockwise)	90° (clockwise)	
Hole Spacing (VESA Standard)	100 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm		
	TCO Certified Generation 8, EPEAT 2018 (US), TÜV/Ergonomics, TÜV/Low blue light content, TÜV/Flicker Free, TÜV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TÜV/S, PSE, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, China Energy Label Grade2, EAC					
Supported			Supported			
Dedicated Software	Monitor Control Utility Screen inStyle	Supported	Supported	Supported	Supported	
	Signal Cables	DisplayPort (2 m)	DisplayPort (2 m)	DisplayPort (2 m)	DisplayPort (2 m), DVI-D (2 m)	
Others	AC power cord (2 m), USB Type-A - USB Type-B cable (2 m), VESA mounting screw x 4, setup guide	AC power cord (2 m), USB Type-A - USB Type-B cable (2 m), cable cover (EV2451), VESA mounting screw x 4, CD-ROM (PDF user's manual), setup guide	AC power cord (2 m), USB Type-A - USB Type-B cable (2 m), VESA mounting screw x 4, setup guide	AC power cord (2 m), VESA mounting screw x 4 (EV2430-F), setup guide		
	Warranty ¹	Five Years	Five Years	Five Years	Five Years	
Zero Bright Pixels ²	Yes	Yes	Yes	Yes		
Dimension Diagrams (Unit: mm)						

EV2730Q		S2133		S1934		S1703-A		S1503-A	
EV2730Q-BK		S2133-HBK		S1934-HBK (Height Adjustable Stand) S1934-TBK (Tilt Stand)		S1703-AHBK (Height Adjustable Stand) S1703-ATBK (Tilt Stand)		S1503-ATBK	
EV2730Q-GY		S2133-HGY		S1934-HGY (Height Adjustable Stand) S1934-TGY (Tilt Stand)		S1703-AHGY (Height Adjustable Stand) S1703-ATGY (Tilt Stand)		S1503-ATGY	
-		-		-		-		-	
EV2730Q-FBK EV2730Q-FGY		S2133-FBK S2133-FGY		S1934-FBK S1934-FGY		S1703-AFBK S1703-AFGY		S1503-AFBK S1503-AFGY	
-		-		-		-		-	
IPS		IPS		IPS		TN		TN	
LED		LED		LED		LED		LED	
26.5" / 67 cm		21.3" / 54 cm		19" / 48 cm		17" / 43.3 cm		15" / 38 cm	
1920 x 1920 (1:1 aspect ratio)		1600 x 1200 (4:3 aspect ratio)		1280 x 1024 (5:4 aspect ratio)		1280 x 1024 (5:4 aspect ratio)		1024 x 768 (4:3 aspect ratio)	
475.7 x 475.7 mm		432 x 324 mm		374.8 x 299.8 mm		337.9 x 270.3 mm		304.1 x 228.1 mm	
0.248 x 0.248 mm / 103 ppi		0.270 x 0.270 mm / 94 ppi		0.293 x 0.293 mm / 87 ppi		0.264 x 0.264 mm / 96 ppi		0.297 x 0.297 mm / 86 ppi	
16.77 million		16.77 million		16.77 million		16.77 million		16.77 million	
178° / 178°		178° / 178°		178° / 178°		170° / 160°		160° / 160°	
300 cd/m ²		420 cd/m ²		250 cd/m ²		250 cd/m ²		400 cd/m ²	
1000:1		1500:1		1000:1		1000:1		600:1	
5 ms (gray-to-gray)		6 ms (gray-to-gray)		14 ms (gray-to-gray)		5 ms (black-white-black)		8 ms (black-white-black)	
DisplayPort (HDCP 1.3), DVI-D (HDCP 1.4)		DisplayPort (HDCP 1.3), DVI-D (HDCP 1.4), D-Sub mini 15 pin		DisplayPort (HDCP 1.3), DVI-D (HDCP 1.4), D-Sub mini 15 pin		DVI-D (HDCP 1.4), D-Sub mini 15 pin		DVI-D, D-Sub mini 15 pin	
-		-		-		-		-	
31 - 127 kHz / 59 - 61 Hz		31 - 76 kHz / 59 - 61 Hz		31 - 64 kHz / 59 - 61 Hz		31 - 64 kHz / 59 - 61 Hz		31 - 49 kHz / 59 - 61 Hz	
-		24 - 80 kHz / 49 - 76 Hz		31 - 64 kHz / 55 - 61 Hz		31 - 64 kHz / 55 - 61 Hz		31 - 49 kHz / 55 - 61 kHz	
-		Separate, Composite		Separate		Separate		Separate	
USB 2.0: Type-B		USB 2.0: Type-B		-		-		-	
USB 2.0: Type-A x 2		USB 2.0: Type-A x 2		-		-		-	
-		-		-		-		-	
1.0 W + 1.0 W		-		0.5 W + 0.5 W		0.5 W + 0.5 W		0.5 W + 0.5 W	
Headphones (Stereo mini jack)		-		Headphones (Stereo mini jack)		Headphones (Stereo mini jack)		-	
AC 100 - 240 V, 50 / 60 Hz		AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz		AC 100 - 240 V, 50 / 60 Hz		AC 100 - 240 V, 50 / 60 Hz		AC 100 - 240 V, 50 / 60 Hz	
25 W		13 W		9 W		8 W		5 W	
64 W		45 W		21 W		18 W		16 W	
0.5 W or less		0.3 W or less		0.5 W or less		0.5 W or less		0.5 W or less	
User1, User2, sRGB, Paper, Movie		User, sRGB, Paper, Movie, DiCOM		User1, User2, sRGB, Paper, DiCOM		User1, User2, sRGB, Paper		User1, User2, sRGB, Paper	
Yes		Yes		Yes		Yes		Yes	
497 x 512.5 - 613.5 x 245 mm		465 x 453 - 535 x 208.5 mm		S1934-H: 405 x 406.5 - 506.5 x 205 mm S1934-T: 405 x 414 x 205 mm		S1703-AH: 367 x 391.5 - 491.5 x 205 mm S1703-AT: 367 x 384 x 188 mm		346 x 349 x 157 mm	
497 x 501.5 x 56 mm		465 x 361 x 64 mm		405 x 334 x 61.5 mm		367 x 304 x 59 mm		346 x 280 x 69 mm	
7.1 kg		8.6 kg		S1934-H: 5.6 kg, S1934-T: 4.6 kg		S1703-AH: 5.4 kg, S1703-AT: 4.4 kg		4.7 kg	
4.2 kg		5.6 kg		3.8 kg		3.6 kg		3.4 kg	
101 mm		82 mm		S1934-H: 100 mm, S1934-T: -		S1703-AH: 100 mm, S1703-AT: -		-	
35° Up, 5° Down		40° Up, 0° Down		S1934-H: 30° Up, 0° Down S1934-T: 30° Up, 5° Down		S1703-AH: 30° Up, 0° Down S1703-AT: 30° Up, 5° Down		30° Up, 0° Down	
344°		35° Right / 35° Left		S1934-H: 35° Right / 35° Left, S1934-T: -		S1703-AH: 35° Right / 35° Left, S1703-AT: -		-	
90° (clockwise)		90° (clockwise)		S1934-H: 90° (clockwise) S1934-T: -		S1703-AH: 90° (clockwise) S1703-AT: -		-	
100 x 100 mm		100 x 100 mm		100 x 100 mm		100 x 100 mm		100 x 100 mm, 75 x 75 mm	
TÜV/Ergonomics, TÜV/Low blue light content, TÜV/Flicker Free, TÜV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TÜV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, China Energy Label Grade3, EAC		TÜV/Ergonomics, TÜV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TÜV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, China Energy Label Grade2, EAC		TÜV/Ergonomics, TÜV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TÜV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, China Energy Label Grade2, EAC		TÜV/Ergonomics, TÜV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TÜV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, China Energy Label Grade2, EAC		TÜV/Ergonomics, TÜV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TÜV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, China Energy Label Grade2, EAC	
-		-		-		-		-	
DisplayPort (2 m), Dual Link DVI-D (2 m)		DVI-D (2 m), D-Sub mini 15 pin (1.8 m)		DVI-D (2 m), D-Sub mini 15 pin (1.8 m)		DVI-D (2 m), D-Sub mini 15 pin (1.8 m)		DVI-D (2 m), D-Sub mini 15 pin (1.8 m)	
AC power cord (2 m), Cable holder (EV2730Q-F), EIZO LCD Utility Disk (PDF user's manual), setup guide		AC power cord (2 m), USB Type-A - USB Type-B cable (1.8 m), VESA mounting screw x 4 (S2133-F), EIZO LCD Utility Disk (PDF user's manual), ScreenManager Pro for LCD [DDC/C], EIZO ScreenSlicer software)		AC power cord (2 m), audio cable (2.1 m), VESA mounting screw x 4, CD-ROM (PDF user's manual), setup guide		AC power cord (2 m), audio cable (2.1 m), VESA mounting screw x 4, setup guide		AC power cord (2 m), audio cable (2.1 m), VESA mounting screw x 4 (S1503-AF), setup guide	
Five Years		Five Years		Five Years		Five Years		Five Years	
Yes		-		-		-		-	
									
Height Adjustable Stand						Tilt Stand			

With current LCD technology, a panel may contain a limited number of missing or flickering pixels. If the monitor is left on continuously over a long period of time, dark smudges or burn-in may appear. To maximize the life of the monitor, we recommend the monitor be turned off periodically. ¹ Usage time is limited to 30,000 hours. ² 6 months from the date of purchase.

Extensive Market Reach



Creative Work



Healthcare



Security & Surveillance / Maritime



Air Traffic Control



Home Entertainment



Business Enterprise

50+ Years of Expertise

Visual Technology Company



Research and Development



Manufacturing



Quality Control



Customization

Innovative Solutions

Built-In Calibration Sensors




Automatically calibrates while you work

IP Decoding Solutions



In-House Optical Bonding

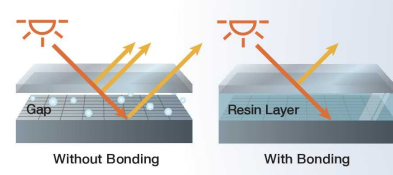


Market-Focused Cloud Solutions



Software for Improved Workflow



Use a single mouse across two PCs



Synchronized adjustment of multiple monitors



Simplified CMS with automatic software and printer settings adjustment

EIZO Corporation

153 Shimokashiwano, Hakusan, Ishikawa 924-8566 Japan
Phone +81-76-277-6794 Fax +81-76-277-6793

www.eizoglobal.com

All product names are trademarks or registered trademarks of their respective companies. EIZO, the EIZO logo, RadiForce, RadiCS, RadiNET, CuratOR, FlexScan, ColorEdge, DuraVision, FORIS, Raptor, and ScreenManager are registered trademarks of EIZO Corporation. EIZO Monitor Configurator, EIZO ScreenSlider, ReVue, SafeGuard, Screen InStyle, and ScreenCleaner are trademarks of EIZO Corporation. The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing, LLC in the United States and other countries. DICOM is the registered trademark of the National Electrical Manufacturers Association for its standards publications relating to digital communications of medical information. VESA is a registered trademark of Video Electronics Standards Association. USB Type-C, USB-C are registered trademarks of USB Implementers Forum, Inc. iPad, iPhone, macOS Sierra are registered trademarks of Apple Inc. ENERGY STAR is a registered trademark of the United States Environmental Protection Agency in the United States and other countries. Some screen images are used with permission from Microsoft. Specifications are subject to change without notice.

Copyright © 2021 EIZO Corporation. All rights reserved. (210102)



WORK BETTER