


EAGLE Standard Split Eco
EG2VE 0895 750 L87 BB0288 CJA NI1

Project Moldova Airport
Customer CAPITAL SRL




Color **RAL 7035**

Electrical	Power factor	-0.06
	Inrush current	20 A / 1320 µs
	Stand-by power	0.5 W
Optical	Luminous flux	123822 lm ±10%
	Luminous efficacy	138 lm/W
	Constant light output	No
Lifetime	Lumen depreciation	L90 after 100 000 h
Protection	Surge protection L-N	10 kV
	Surge protection L/N-PE	10 kV
	LED module thermal protection w/ NTC	No
	Max products per MCB B16	1
	Increased corrosion resistance	Primer
Controls	Dimming	No dimming

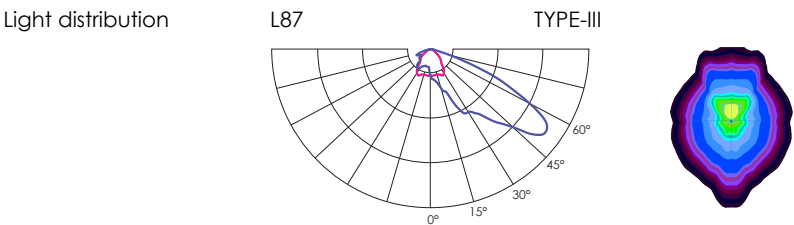

Dimensions A x B x C (mm): 540 x 868 x 705

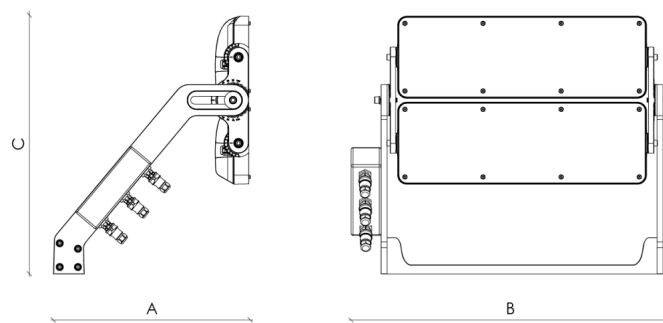

Product images

