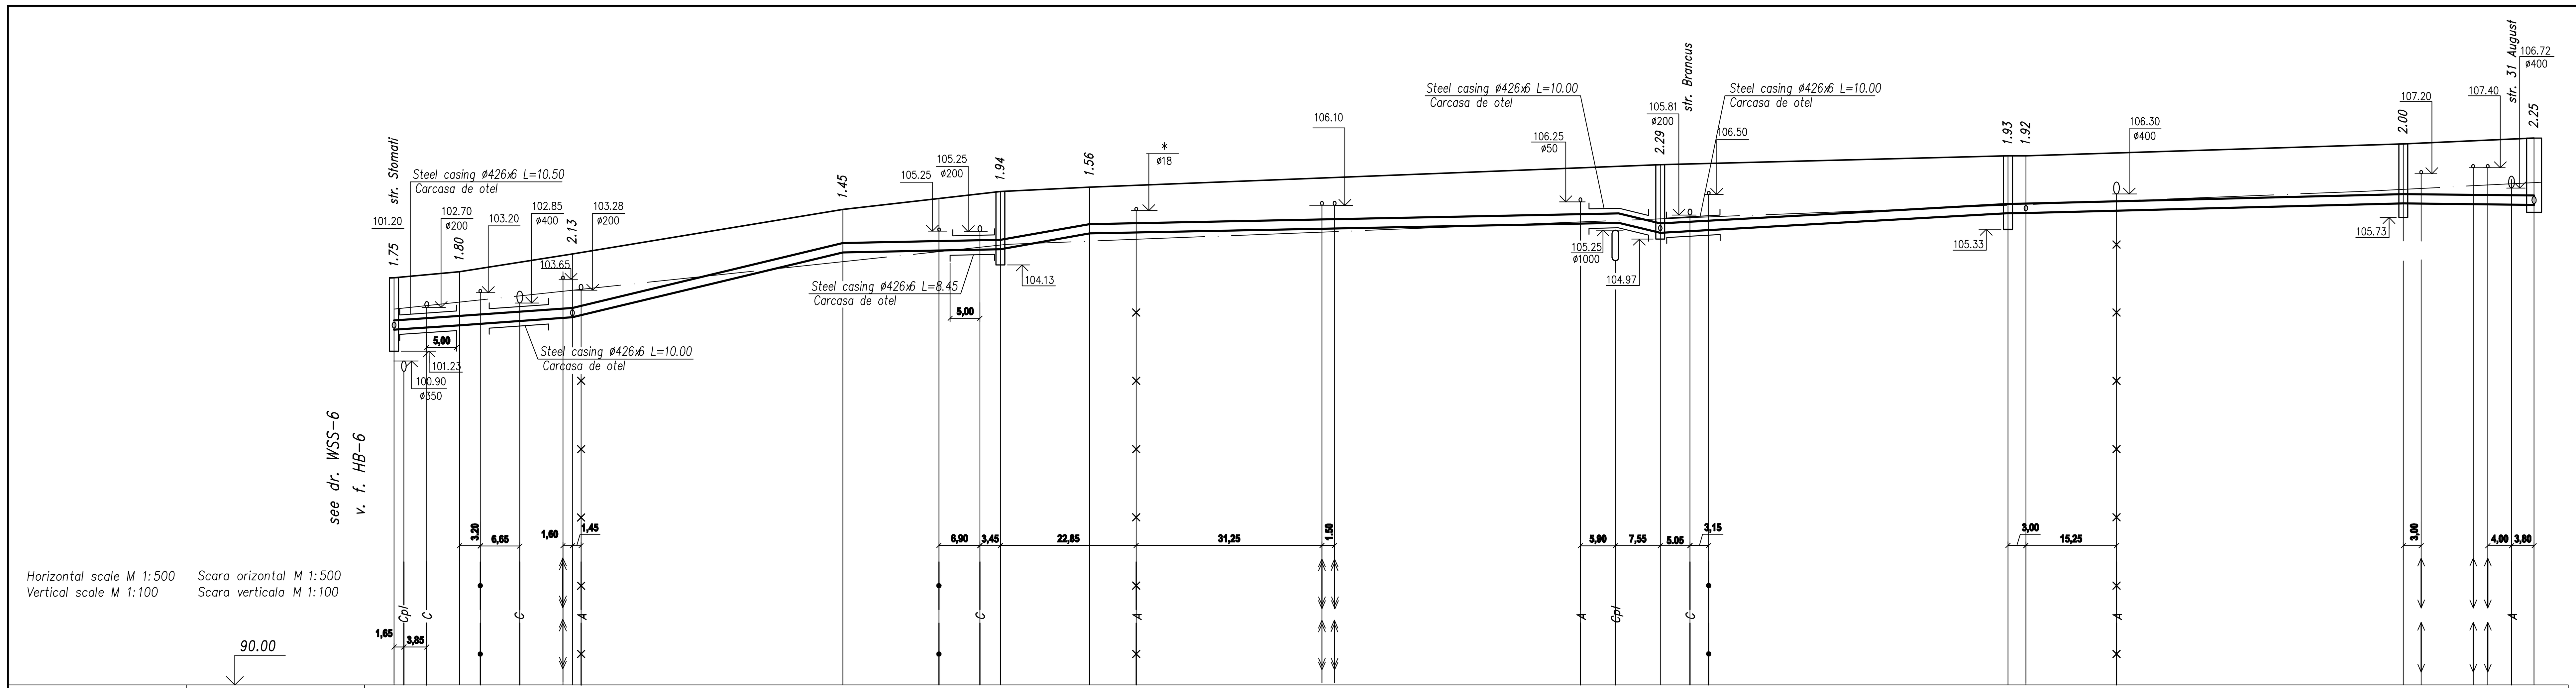

Level of pipe bottom	Cota de jos a tevii	101.95, 102.01, 102.10, 102.24, 102.37, 104.55, 104.65, 104.66, 105.19, 105.55, 105.21, 105.26, 105.87, 105.88, 105.95, 106.20, 106.15
Designed ground level	Cota de proiect a terenului	
Natural ground level	Cota terenului	103.70, 103.90, 104.50, 106.00, 106.60, 106.75, 106.85, 106.90, 107.50, 107.80, 107.80, 108.20, 108.55
Type of pipe	Marcare tevii si tipul de izolare	P I P E PE100 SDR17 PN10 ø315; T E A V A PE100 SDR17 PN10 ø315
Base	Fundatie	Sand h=150mm K⩾0.95 Crushed rock h=150mm; Nisip h=150mm K⩾0.95 Pietris h=150mm
Length, m / Slope	Lungime, m / Panta	0.0142 46.25; 0.048 45.50; 0.004 26.50; 0.0353 15.00; 0.004 89.30; 0.049 7.10; 0.0113 58.40; 0.005 67.20; 0.0023 22.00
Distance between manholes and turning points	Distanta	12.10, 18.65, 72.00, 111.40, 58.40, 3.00, 64.20, 22.00
Number of manholes, turning points	Nr. caminului, punctului, unghiului cotului	6, T.1, T.2, ПГ-9, 10, ПГ-11 T.3, 13, 14

NOTE:

1. Existing crossing electric cables shall put in casing of asbestos-cement pipe cut along axis ø100 L=2m.
2. Before earth work commencement all points of determination to existing bends shall dig out and shall specify.
3. The distance between top of water pipe-line casing and trench bottom of heating main should be not less than 500mm at the water pipe-line and heating main crossing point.
4. Levels of existing services of crossing points shall cpecify on-site.
5. * - location of existing distribution pipe-line shall be changed temporarily if it is necessary.
6. Water pipe-line should lay into casing L=1.0m at the crossing points of power cables and communication cables.

NOTA:

1 Cablurile electrice existente se imbraca in carcasa din teava de azbestociment ø100 L=2m.
2. pana la demararea lucrarilor de terasament se descopera toate locurile de conectare la bransamentele existente si se precizeaza cota.
3. In locul intersectiei apeductului cu traseul termic distanta intre partea de sus a mantalei conductei si fundul canalului transeului termic trebuie sa fie de minimum 500 mm.
4. Cotele retelelor existente se precizeaza la fata locului.
5. * - conducta de distributie existenta temporar se reamplaseaza in cazul in care e necesar.
6. In locurile de intersectie cu cablurile electrice si legarile de cablu apeductul se instaleaza in carcasa L=1.0m.

3660-6-WSS

Rehabilitation of the land supply system in Balti municipality. Aqueduct from Fyodor Dostoevsky Street to Independentei Street, Sportiva Street to str. N. Gluhovski (stage I from str. Alexandr Puskin to str. N. Gluhovski).

External water supply network

Change	No.part	Page	No.doc	Signature	Date
Chief spec.	Gubareva				09.20
Designed	Vainer				09.20
Checked	Gubareva				09.20

Stage	Page	Total
WP	7	

Longitudinal profile of pipe-line from well 6 up to wel 14.

ITN INTEXNAUCA S.A. Chisinau 2020

3660-6-AE

Reabilitarea sistemului de alimentare cu apa in mun. Balti.Apeduct de pe str. Fiodor Dostoievski pe str.Independentei, str. Sportiva pina la str. N. Gluhovski (etapa I de la str. Alexandr Puskin pina la str. N. Gluhovski).

Reţea exterioară de alimentare cu apă

Schim	Nr.sect.	Foaia	Nr.doc	Semnat.	Data
Sp. prin.	Gubareva				09.20
Elabor	Vainer				09.20
N. contr.	Gubareva				09.20

Faza	Foaia	Foi
PE	7	

Profilul retelei de la caminul 6 pana la caminul 14.

ITN INTEXNAUCA S.A. Chisinau 2020

format A3x3

Инв. № подл. | Подпись и дата | Взам. инв. №