

DL22A-M Digital Podium

The DL22A-M is designed to be cost-effective solution compared to DL23B. It is convenient for short speeches like at small, press or hotel conference rooms. It is easy to connect your projector and sound systems to DL22A-M. On/Off buttons and easily accessible communication connectors to transfer files into built-in PC.

DL22A-M

- 22" Multi touch capacitive touch screen
- 22" Front screen
- Ergonomic functional design
- Lifting column for height adjustment
- Multiple color options
- Built-in high performance PC.
- Professional microphones




The touch screen is designed with IPS Technology to prevent picture loss during angle change. Large display size makes the various documents to read easy.



22" Front screen



On/Off buttons and easily accessible communication connectors to transfer files into built-in PC.




Electrical lift system to adjust the height of the podium up/downward




The front screen has built in signage media player and content management software

DL22A-M Technical Specifications

Main Specifications	
Lecturer Screen	22" Multi touch capacitive
Front Screen	22" with built-in signage media player
Built-in PC for Speaker Screen	intel i3 4GB Ram, 120 SSD, Win 10 Embedded IoT
Microphone	2 pcs 18" Gooseneck Condenser Microphone
Lifting Column	Available
Front Panel	
	22"
Resolution	1920x1080FHD
Brightness	250 cd/m2
Aspect ratio	16:9
Panel Type	IPS
Front Panel Player	Built-in Digital Signage Media Player
Front Panel Content Management Software	Available
Lecturer Panel	
	22"
Resolution	1920x1080 FHD
Brightness	250 cd/m2
Aspect ratio	16:9
Touch Screen Technology	Capacitive
Touch Points	10 points
Lecturer Panel PC Specifications	
CPU	4th Generation Intel Core i3
RAM	4 GB DDR4
HDD	120 GB SSD
Operating System	Windows Embedded 10 IoT
Microphone	
Length	18"
No of microphone	2 pcs
Output Connector	3-way XLR (Male)
Microphone Type	Cardioid
Frequency Response	50 -18 kHz
Sensitivity (at 1,000Hz)	-60dB ± 3dB
Impedance	220Ω
Power ON indicator	LED
Power requirement	2xPhantom Power (48V)
Inputs (on Speaker Panel)	
230V Plug (Max 5A)	Available
USB	USB 2.0 X 4 (for internal PC)
Outputs (Bottom of Podium)	
HDMI	Available
Ethernet	Available
XLR for microphone	Available
USB	USB 2.0 x 2 (for internal PC)
Height Adjust Engine	
Movement	Vertical (Up/Down)
Control	By Buttons (Up/Down)
Speed	Max speed: 38 mm/s
Lifting strength	700N
Locking System	Automatic Locking when engine not working
Engine Type	Electrical
Power	
Power Input	230V 50Hz
Power Consumption	450W (max)
Peripherals & other features	
Clock &Timer	Available
Color	Black speaker panel and base, gray body
Packing	Wooden box export packing
Mechanical Specs	
Outline Dimension (mm)	Set: 550 x 800 x 890 Package: 700 x 950 x 1270
Weight (kg)	Set: 79 kg Package: 117 kg
Optional features	Front screen PC Flight case

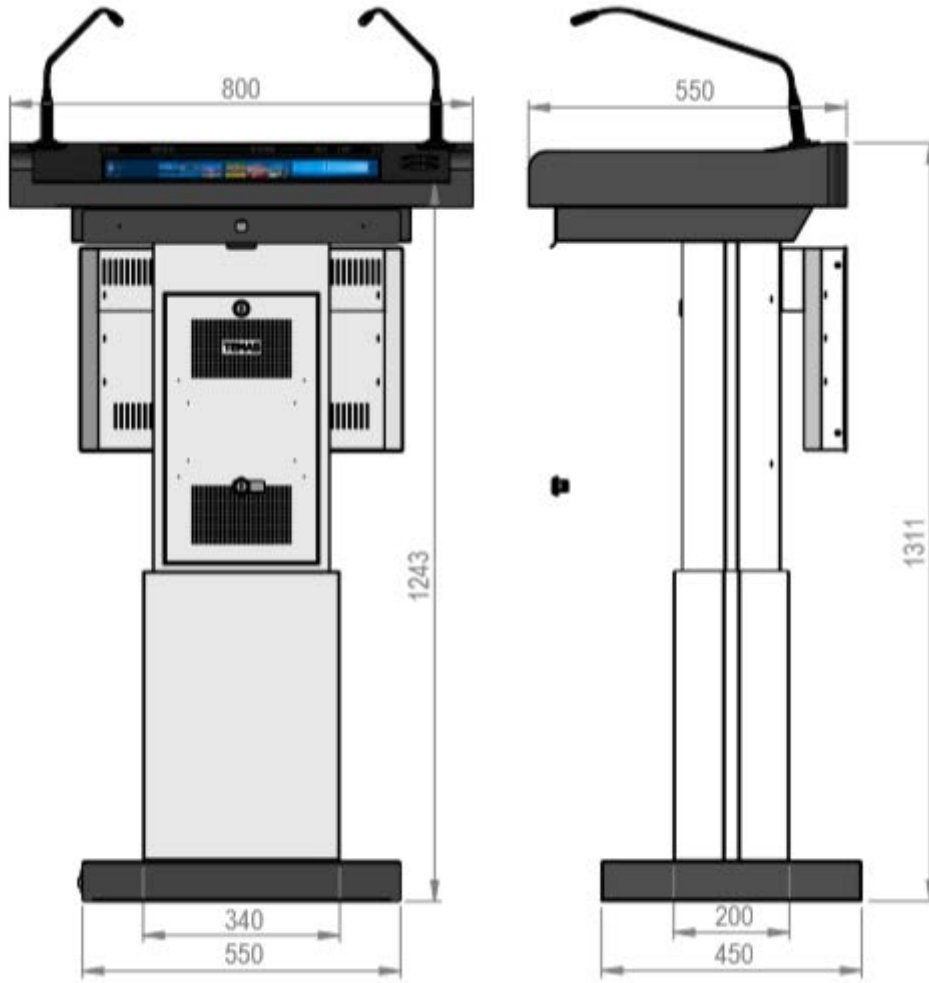

Maximum Height

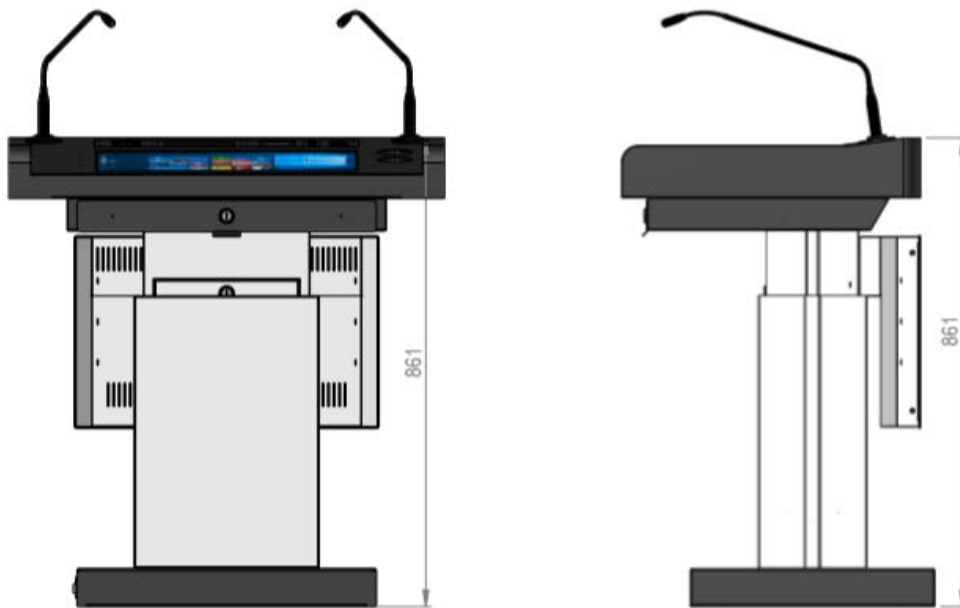

Minimum Height