



Cisternske nadgradnje ATRIK model PRA/PV


Te vrste nadgradenj so namenjene transportu pitne ali tehnološke vode ter pranju prometnih površin. Odvisno od izbrane opreme je možno prečrpavanje vode v druge rezervoarje, zajemanje vode iz naravnih virov, strojno ali ročno pranje prometnih površin, sten tunelov, obcestnih ograj in ostale prometne infrastrukture ter čiščenje in prebijanje vertikalnih in horizontalnih jaškov in cevovodov.

Tank superstructures ATRIK model PRA/PV

The superstructures are intended for the transport of drinking and industrial water and for washing of the road surfaces. Depending on chosen equipment it is possible to deliver water into other reservoirs, water filling from natural resources, machine or manual washing of road surfaces, tunnel walls, road railings, parapets and other traffic infrastructures. Cleaning of manholes and the sewage and drain systems is also possible by means of high pressure water.

Cisternske nadgradnje ATRIK model PRA/PV

Ove vrste nadgradnje namenjene su transportu pitke i tehnološke vode te pranju ulica. Zavisno od izabrane opreme, moguće je prečrpavanje vode u druge rezervare, uzimanje vode iz prirodnih izvora, mašinsko ili ručno pranje ulica, tunela, ograda, kao i ostale putne infrastrukture i čišćenja te probijanja vertikalnih i horizontalnih cevi i cevovoda.

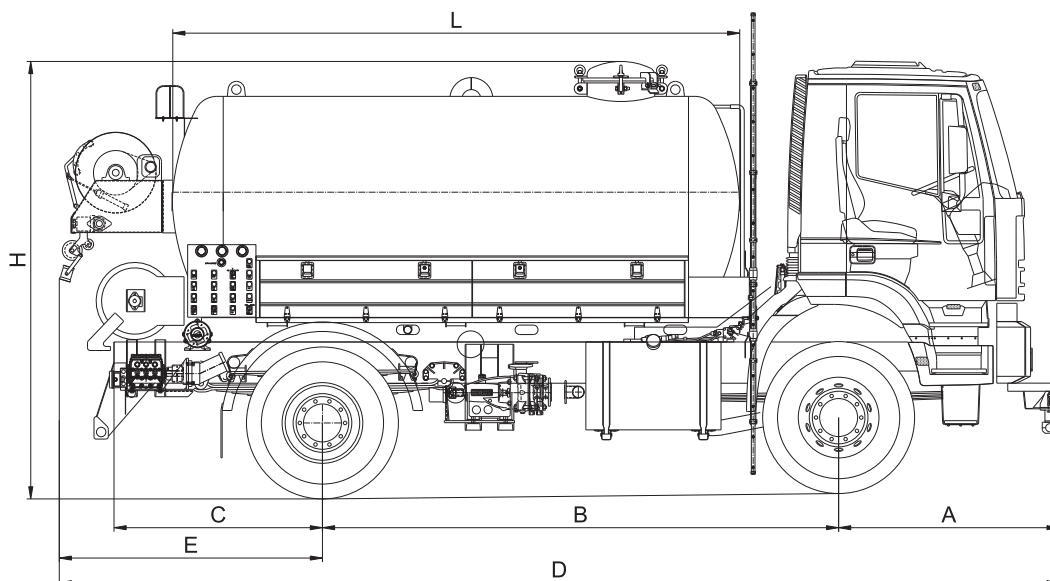

Tip / Type			PRA - PV - KAPRA			
Prostornina rezervoarja za vodo Water reservoir volume	okrogli / eliptični cilindrical / elliptical	m ³	min	1	max	16
Vodna črpalka Water pump	Kapaciteta / Capacity	l/min	min	400	max	860
	Tlak / Pressure	bar	min	6	max	11,5

Mere Dimensions	A	mm	min	1.300	max	1.600
	B	mm	min	2.500	max	4.200+(1.350-1.400)
	C	mm	min	900	max	2.500
	D	mm	min	7.500	max	10.500
	E	mm	min	1.000	max	3.000
	H	mm	min	2.500	max	4.000
	L	mm	min	2.000	max	6.000
	Širina / Width	mm	min	1.800	max	2.550
Masa nadgradnje / Bodywork mass		kg	min	700	max	5.000
Masa neobremenjenega vozila / Total weigh		kg	min	2.400	max	12.000
Tovor teoretično / Theoretical payload		kg	min	1.100	max	16.000
Primerna šasija / Recommended chassis	Skupna dov. masa / G.V.W.	kg	min	3.500	max	28.000

PODATKI SO ZGOLJ INFORMATIVNEGA ZNAČAJA - FOR INFORMATION ONLY

Opcije / Option			PRA - PV - KAPRA			
Prednja pralna letev - čiščenje površin spredaj Front washing bar - front surfaces cleaning			Širina pranja Washing width	2,8 m	max. 860 l/min max. 11,5 bar	
Zadnja pralna letev - čiščenje (polivanje) zadaj Rear washing bar - rear cleaning (watering)			Širina pranja Washing width	2,8 m	max. 400 l/min 0,5 ... 6 bar	
Navijalni bobn - ročno pranje površin Hose reel - manual surface cleaning			m -R"	min 10m - ½"	max	60 m - ¾"
Visokotlačna vodna črpalka High pressure water pump	Kapaciteta / Capacity	l/min	min	40	max	390
	Tlak / Pressure	bar	min	80	max	240
Bočna pralna letev - čiščenje tunelov in ograj Side washing bar - tunnel and railings cleaning			Višina pranja Washing width	3,7 m	max. 390 l/min max. 240 bar	
Prebijalni navijalni bobn - čiščenje jaškov High pressure hose reel - manhole cleaning			m -R"	min 60 - ¾"	max	120 m - 1"

Prevoz pitne vode / Drinking water transport
Cisterna iz nerjavne pločevine / Stainless stell reservoir; Polirano s krožčkanim vzorcem / Circular pattern polishing
Zajem vode iz rek in jezer / Water filling from natural resources
Prečrpavanje v druge rezervoarje / Pumping into other reservoirs
Ročna pralna pištola / Manual washing spray gun
Bočni zaboji za opremo / Side mounted equipment boxes
Prenosna delovna svetilka / Portable working light, Daljinske radijske komande / Radio remote control