



i-SENSYS X 1440i Series

TRANSFORM PRINTING AND SCANNING PROCESSES WITH COMPACT YET POWERFUL MULTI-FUNCTION DEVICES



PRODUCTIVITY



SECURITY



CONNECTIVITY



COMPACT DESIGN



CONTROL &
MAINTENANCE



SUSTAINABILITY

Canon

i-SENSYS X 1440i Series

PRODUCTIVITY

- Intuitive display with tablet like operability
- Fast print and scan speeds
- Automatic double-sided printing
- Up to 900 sheets paper input

CONNECTIVITY

- Connect to cloud directly from the device for simple storage solutions or through Canon's uniFLOW Online for secure advanced scan workflows
- Print and scan from mobile devices wherever you are

CONTROL AND MAINTENANCE

- Cloud based output management for centralised control
- Flexible user management solutions
- Remote access to device control functions
- Toner status tool reduces downtime

SECURITY

- Embedded User Authentication secures access to device
- Encrypted Secure Print function prevents unauthorised viewing of printed material
- Encrypted PDF protects you documents
- Verify System at Start-up enhances device integrity

COMPACT DESIGN

- Small footprint, ideal as a desktop configuration
- All-in-one cartridge with increased toner yield
- Optional cassettes for enhanced input capacity
- Easy access to replace consumables

SUSTAINABILITY

- Low TEC (Typical Electrical Consumption) decreases power consumption to save energy and lower running costs
- Sleep mode and low melting point toner reduce energy consumption further
- Auto Duplex Print saves on paper wastage

QUICK FACTS


i-SENSYS X 1440iF:

- Print, Copy, Scan, Send and Fax
- 5-inch/12.7cm TFT LCD touchscreen
- Print Speed: 40ppm (A4)
- Automatic double-sided printing
- Scan speed: up to 100ipm
- uniFLOW compatibility
- Network, Wi-Fi, USB and QR code connectivity
- Max paper input capacity: 900 sheets

i-SENSYS X 1440i:

- Print, Copy, Scan and Send
- 5-inch/12.7cm TFT LCD touchscreen
- Print Speed: 40ppm (A4)
- Automatic double-sided printing
- Scan speed: up to 100ipm
- uniFLOW compatibility
- Network, Wi-Fi, USB and QR code connectivity
- Max paper input capacity: 900 sheets

TAILORED SOLUTIONS TO MEET EVERY CHALLENGE

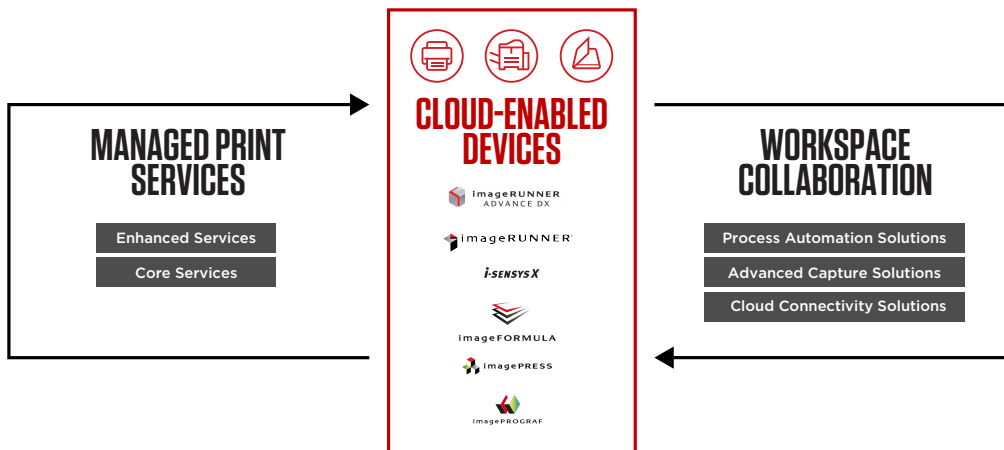

Canon's Digital Transformation Services (DTS), bring together our leading hardware and software into an integrated technology ecosystem, designed to support your transformation journey. This offering combines Managed Print Services and Workspace Collaboration solutions, to help you gain transparency and control over the entire document lifecycle.

TECHNICAL SPECIFICATIONS

i-SENSYS X 1440i Series

PRODUCT NAME		Speed dials	Up to 281dials
Machine type	Mono Laser All-In-One	Group dials/destinations	Max. 299 dials / Max. 299 destinations
Available functions	i-SENSYS X 1440iF:Print, Copy, Scan and Fax i-SENSYS X 1440i:Print, Copy, Scan	Sequential broadcast	Max. 310 destinations
PRINTER		Memory backup	Permanent fax memory backup (Backup with flash memory)
Print speed	Single sided: Up to 40 ppm (A4) Up to 65.4 ppm(A5-Landscape) Double sided: Up to 33.6 ipm (A4)	Double sided faxing	Yes (Transmit and Receive)
Printing method	Monochrome laser beam printing	Other features	Fax Forwarding, Dual Access, Remote Reception, PC Fax (TX only) DRPD, ECM, Auto Redial, Fax Activity Reports, Fax Activity Result Reports, Fax Activity Management Reports
Print resolution	Up to 1200 x 1200 dpi	MEDIA HANDLING	
Warm-up time	Approx. 14 seconds or less from power on	Scanner type	Platen, 2-sided ADF (single pass)
First Print Out Time	Approx: 5.0 seconds	Scanner type	Platen, 2-sided ADF (single pass)
Printer languages	UFRII, PCL 5e ² , PCL6, Adobe® PostScript3	Paper input (Standard)	250-sheet cassette 100-sheet multi-purpose tray 50-sheet ADF
Fonts	93 PCL fonts 136 PostScript fonts	Paper input (Option)	550-sheet cassette
Print margins	5 mm-top, bottom, left and right 10 mm-top, bottom, left and right (Envelope)	Maximum paper input capacity	900-sheet
Toner saver mode	Yes	Paper output	150-sheet
Advanced printing features	Encrypted Secure Print Secure Print Print from USB memory key (JPEG/TIFF/PDF) Print from Cloud: uniFLOW Online, Dropbox, GoogleDrive, OneDrive (PDF/JPEG) Microsoft Universal Print support Barcode Print ⁵ iOS: AirPrint, Canon PRINT Business app Android: Mopria certified, Canon PRINT Business app, Canon Print Service Plug-in	Media types	Plain paper, Recycled paper, Heavy Paper, Thin paper, Label, Post card, Envelope
COPIER		Media sizes	Cassette (Standard and optional): A4, A5, A5 (Landscape), A6, B5, Legal, Letter, Executive, Statement, OFFICIO, B-OFFICIO, M-OFFICIO, GLTR, GLGL, Foolschap, 16K, Custom sizes: Min. 105 x 148 mm Max. 216.0 x 355.6 mm. Multi-purpose tray: A4, A5, A5 (Landscape), A6, B5, Legal, Letter, Executive, Statement, OFFICIO, B-OFFICIO, M-OFFICIO, GLTR, GLGL, Foolschap, 16K, Indecard, Envelope (COM10, Monarch, C5, DL), Custom sizes: Min 76.2 x 127 mm Max. 216.0 x 355.6 mm.
Copy speed	Single sided (A4): Up to 40 ppm Double sided (A4): Up to 33.6 ipm	Media weights	ADF: A4, A5, A6, B5, Legal, Letter, Statement, Custom sizes: Min. 48 x 85.0 mm Max 216 x 355.6 mm Cassette (standard and optional): 60 to 120 g/m ² Multi-purpose tray: 60 to 199 g/m ² ADF: 50 to 105 g/m ²
First Copy Output Time (FCOT)	Approx. 6.1 seconds or less	Double sided printing	A4, Legal, Letter, OFFICIO, B-OFFICIO, M-OFFICIO, GLGL, Foolschap Custom size - Min. 210 x 279.4 mm Max. 216.0 x 355.6 mm 60 to 120 g/m ²
Copy resolution	Up to 600 x 600 dpi	INTERFACE & SOFTWARE	
Copy modes	Text, Text/Photo (Default),Text/Photo (High Quality), Photo	Interface type	USB 2.0 Hi-Speed, 10BASE-T/100BASE-TX/1000Base-T, Wireless 802.11b/g/n, Wireless Direct Connection
Double sided copying	2-sided to 2-sided (Automatic)	Operating System compatibility	Windows® 11 / Windows® 10 / Server® 2022 / Server® 2019 / Server® 2016 / Server® 2012R2 / Server® 2012 Mac OS X version 10.13 & up Linux ⁷
Multiple copy	Up to 999 copies	Network Protocol	Print: TCP/IP (LPD/Port9100/IPP/IPPS/WSD) Scan: Push Scan: File: FTP (TCP/IP), SMB3.0 (TCP/IP) E-mail/I-Fax: SMTP (send), POP3 (receive) Pull Scan: TCP/IP
Reduction / Enlargement	25-400% in 1% increments	Management	MF Scan Utility, Remote User Interface (RUI), Remote operation software, Department ID Management, Toner Status Tool, iW Enterprise Management Console: Server-based software for centralised management of a fleet of devices eMaintenance: embedded RDS allows remote eMaintenance services such as meter capture, automatic consumables management and remote diagnostics. Universal Log-in Manager / uniFLOW online / uniFLOW online Express / uniFLOW Compatibility Application Library
Other features	Frame Erase, Collate, 2 on 1, 4 on 1, ID card copy	Software and printer management	
SCANNER			
Type	Colour		
Scan resolution	Optical: Up to 600 x 600 dpi Enhanced: Up to 9600 x 9600 dpi		
Scan speed	Single sided mono: 50ipm (300x300dpi) Single sided colour: 40ipm (300x300dpi) Double sided mono: 100ipm (300x300dpi) Double sided colour: 80ipm (300x300dpi) Single sided mono: 40ipm (300x600dpi) Single sided colour: 20ipm (300x600dpi) Double sided mono: 80ipm (300x600dpi) Double sided colour: 40ipm (300x600dpi)		
Colour scanning depth	24 bit/24 bit (input/output)		
Greyscales	256 levels		
Compatibility	TWAIN , WIA, ICA		
Max. scan width	216mm		
Scan to E-mail	TIFF/JPEG/PDF/Compact PDF/Searchable PDF/ Encrypted PDF ⁴ /PDF (Digital signature) ⁴		
Scan to PC	TIFF/JPEG/PDF/Compact PDF/Searchable PDF/ Encrypted PDF ⁴ /PDF (Digital signature) ⁴		
Scan to USB memory key	TIFF/JPEG/PDF/Compact PDF/Searchable PDF/ Encrypted PDF ⁴ /PDF (Digital signature) ⁴		
Scan to FTP	TIFF/JPEG/PDF/Compact PDF/Searchable PDF/ Encrypted PDF ⁴ /PDF (Digital signature) ⁴		
Scan to Cloud¹	TIFF/JPEG/PDF/PNG ⁵		
iFAX	ITU-T.37		
FAX	i-SENSYS 1440iF only		
Modem speed	33.6 Kbps (Up to 3 seconds/page ⁶)		
Receive mode	Fax only, Fax/Tel Auto Switch, Answer Mode, Manual		
Fax resolution	Standard: 200 x 100 dpi Fine: 200 x 200 dpi Super fine: 200 x 400 dpi Ultra fine: 400 x 400 dpi		
FAX memory	Up to 512 pages ⁶		

TECHNICAL SPECIFICATIONS

i-SENSYS X 1440i Series

GENERAL FEATURES

Recommended Monthly Print Volume	750 - 4,000 pages per month
Duty cycle	Max. 80,000 pages per month ⁸
Processor Speed	1200MHz
Memory	1GB
Storage	4GB eMMC
Control panel	12.7 cm LCD Colour Touch Screen
Dimensions with trays (W x D x H)	420 mm x 460 mm x 375 mm
Installation space (W x D x H)	689 mm x 1,081 mm x 824 mm
Weight	Approx. 15.6 Kg
Operating environment	Temperature: 10 to 30°C (50 to 86°F) Humidity: 20 to 80% RH (no condensation)
Power Source	220-240V(±10%) 50/60Hz (±2Hz)
Power Consumption	Maximum: Approx. 1,280 W Active printing: Approx. 480W Standby: Approx. 8 W Sleep mode: Approx. 0.9 W Typical Electricity Consumption (TEC): 0.32 kWh/week ¹² For detailed information relating to Lot26 regulation, please go to: http://www.canon-europe.com/For_Work/Lot26/index.aspx
Noise Levels	Sound Pressure ⁹ : Active: 53 dB Standby: Inaudible ¹⁰ Sound Power ⁹ : Active: Duplex 68dB / Simplex 67dB Standby: Inaudible ¹⁰

CONSUMABLES

Cartridges TONER T13 (10,600 pages¹¹)

ACCESSORIES/ OPTIONS

Items

i-SENSYS X 1440iF:
CST.Feeding Module-AH1 (550-sheet cassette)
TEL 6 Kit Long Cord (Telephone handset)
Barcode Printing Kit-E1E
MiCard Multi (Card reader for identification with RFID or magnetic cards with uniFLOW)
Micard Plus (Card reader for identification with RFID or magnetic cards with uniFLOW)
MiCard Attachment Kit-B1
Send PDF Security Feature Set-E1

i-SENSYS X 1440i:
CST.Feeding Module-AH1 (550-sheet cassette)
Barcode Printing Kit-E1E
MiCard Multi (Card reader for identification with RFID or magnetic cards with uniFLOW)
Micard Plus (Card reader for identification with RFID or magnetic cards with uniFLOW)
MiCard Attachment Kit-B1
Send PDF Security Feature Set-E1

Notes:

- ^[1] Subscription to a uniFLOW Online and/or third party cloud service is required.
- ^[2] A Canon PCL5e driver is not supplied, however PCL5e commands are supported on the device.
- ^[3] Accessory - Barcode Printing Kit-E1E - is required
- ^[4] Accessory - Send PDF Security Feature Set-E1 is required
- ^[5] Scan by MF Scan Utility or Canon PRINT Business app
- ^[6] Based on ITU-T Standard Chart No. 1
- ^[7] Web distribution only. Linux support printing only.
- ^[8] Duty cycle is defined as the maximum number of printed pages for a single peak month. Any usage above the recommended duty cycle may decrease the life of the product
- ^[9] Declared noise emission in accordance with ISO 9296
- ^[10] Inaudible means that the emission sound pressure level for a bystander is lower than absolute standard for background noise in accordance with ISO 7779
- ^[11] Based on ISO/IEC 19752
- ^[12] As per US ENERGY STAR® version3.0.

Software & Solutions



Compatibility



Canon Inc.
canon.com

Canon Europe
canon-europe.com

English edition
© Canon Europa N.V., 2023