


HYDROPHILIC GUIDE WIRES

Features

- Hydrophilic coating provide excellent lubricity;
- Superelastic nitinol Wire core for kink resistance prevent guidewire kinking;
- Full length tapered core design for excellent torque transmission and flexibility;
- Special polymer cover the good radiopaque performance;

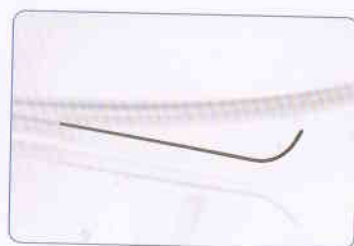

Dimensions	
OD Range	0.025"-0.038"
Length Range	80cm-300cm



Product No.	Diameter	Length(cm)	Shaft Stiffness	Tip form	Product No.	Diameter	Length(cm)	Shaft Stiffness	Tip form
42.01.20000	0.035"	150	Standard	Straight	42.01.20011	0.038"	150	Standard	Straight
42.01.20001	0.035"	150	Standard	Angled	42.01.20006	0.038"	150	Standard	Angled
42.01.20002	0.035"	180	Standard	Straight	42.01.20007	0.038"	180	Standard	Straight
42.01.20003	0.035"	180	Standard	Angled	42.01.20008	0.038"	180	Standard	Angled
42.01.20004	0.035"	260	Standard	Straight	42.01.20009	0.038"	260	Standard	Straight
42.01.20005	0.035"	260	Standard	Angled	42.01.20012	0.038"	260	Standard	Angled