

# Mobile, Reliable, Simple





# Mobile, Reliable, Simple





# Salient Dual Injector System

The SALIENT™ Contrast Injection System has been engineered to deliver safety and performance with superior lifetime value.

Ideal for your contrast injection needs, Salient Dual brings innovation and value to CT suites by combining mobility, simplicity and reliability.

# **Control Room Monitor**

- Wi-Fi enabled controls keep your Salient injector wireless and mobile
- Complete injector protocol management all from within the control room
- Real-time injection pressure and flow metrics
- Responsive interface with all the advantages of a touch screen tablet PC
- Injection history: Storage up to 100 past injections
- Utilizes a secure, self-contained, stand-alone peer-to-peer injector-to-monitor Wi-Fi connection



# **Clinical Highlights**

# Reduce Image Artifacts

Utilizing a saline flush supports minimizing streak artifacts that are often common as the superior vena cava empties into the right heart.

# Improve and Increase Peak Contrast Enhancement

Utilizing a saline flush pushes the contrast through the vascular system.


# Controlled Timing of Contrast Bolus

Utilizing a saline flush creates a tight contrast bolus that enables precise timing of contrast in the vascular system that is essential for multi-slice CT scanning.

#### Optimize Contrast Usage

Utilizing a saline flush can avoid pooling of contrast in veins and the contrast connection line.







<sup>1</sup> Images used with permission

# MEDRAD Salient™ Contrast Injector **Specifications Overview**

#### **Functional**

Maximum pressure 300 psi Flow rate 0.1 to 10 ml/s Maximum volume 190 ml Multi-phase protocols Up to six phases

Storage for 20 different named protocols

Manual fill rate Up to 10 ml/s Auto fill rate Up to 10 ml/s

# Controls

Base Line power IEC Inlet On/off switch 5.7" LCD touch screen Head Arm hutton On/off soft switch

Hand switch (optional) Inject now/stop Foot switch (optional) Inject now/stop **Infared Remote control** Inject now/stop

### Mechanical

Weight 25.5 kg 1315 mm Height 500 mm x 500 mm Floor area

4 castors, all individually locking No. of wheels

#### Electrical

Line voltage 100 - 230 VAC Line frequency 50/60 Hz

**Battery operation** Dual batteries, sealed lead acid Mains power operation Simultaneous operation and battery

charging

Contrast heat maintainer 37°C +/- 4°C, 5W

(one (1) included)

#### Ordering Details

oracing pecane	
PART NAME	PART NO
Salient Single Injector	DC009S
Salient Single Injector with Remote Control Unit	DC009SW
Salient Dual Injector	DC009D
Salient Dual Injector with Remote Control Unit	DC009DW
Scanner Interface Box (Optional)	DC200
Connector Tubing, for Dual (Box of 50)	ZY5152
Connector Tubing Single (Box of 50)	ZY5151
Syringe with quick fill tube (Box of 50)	ZY6322
Syringe with fill spike (Box of 50)	ZY6323
Syringe with fill spike, single LPCT (Box of 50)	ZY6324
Syringe with quick fill tube (Box of 50)	ZY6325
Foot Switch	SF0004
Hand Switch	SF0005
Wall Loader	MDL001
Heat maintainer (one (1) included)	DC022
Operations Manual - Multilanguage CD (one (1) included)	MN040015

#### All Imaxeon products feature a one-year warranty.

# Visit our website www.imaxeon.com

Bayer, the Bayer Cross, MEDRAD, and IMAXEON are trademarks of the Bayer group of companies.

Imaxeon Pty Ltd is a subsidiary of Bayer Medical Care, Inc. MEDRAD is a federally registered trademark of Bayer Medical Care, Inc. USA. Salient is a trademark of Bayer Medical Care, Inc. Used by permission of Bayer Medical Care, Inc. In the interest of continually improving product quality the specifications shown on this brochure may change at the discretion of the manufacturer.

<sup>1</sup> Diagnostic images courtesy of Royal Prince Alfred Hospital.


#### A Quality Company

EN ISO 13485:2012



# **DIMENSIONS**

# Side View

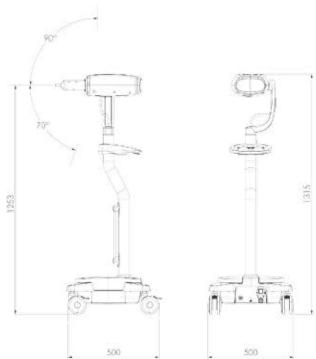

### Top View

