

Specifications for Dongfeng Four-wheel Tractor

Tractor Parameters	Model		DF-1004
	Drive Type		4WD
	Overall Dimensions L×W×H(mm)		4780×2327×2975
	Wheel Track(mm)	Front	1860
		Rear	1830
	Wheel Base(mm)		2665
	Ground Clearance(mm)	Under Front Axle	452
	Rated Traction Force(N)		24000
	Construction Mass(Kg)		4085
	Min. Turning Radius(m)		4.3
Engine Specifications	Theoretical Speed(km/h)	Forward	2.30,3.60,5.80,8.00,10.0,15.6,25.0,34.9
		Reverse	3.10,4.80,7.70,10.80
	Model		LR6108T
	Type		4-cylinder,Upright inline cylinder radiator cooling,4-stroke cycle, direct- injection
	Rated Power(Kw/hp)		66/90.0
	Rated Fuel Consumption(g/kw/h)		≤242
	Rated Speed(rpm)		2300
	Bore×Stroke(mm)		108×130
Drive System	Total Displacement(L)		7.14/7.42
	Clutch		Dry Independent type dual Function clutch

	Gear Box		$4 \times (2+1) \times 2$
	Main Drive		One Pair of Spiral Bevel Gear
	Differential		Obturation, four bevel gears
	Differential Lock		Mesh gear
	Final Transmissions		Planetary reduction gear
Travelling Mechanism	Tyre	front	14.9-24
		rear	16.9-38
	Steering Gear		Hydraulic steering
	Brake		Oil immersed multiplate disc
Working Device	Hydraulic System	Lifting Capacity at 610 mm Behind Lift Point(Kg)	2200
		3-point Suspension	Category: II
	P.T.O.Shaft	Rotating Speed(rpm)	540/1000
		Spline size	6-φ35 Rectangular spline

Caracteristica Tehnica




Incarcator Frontal

Specificația tehnică:

Tara producatoare	Ucraina
Producator	AGROCUB
Putere necesara	Min 80 CP
Inaltimea de ridicare	4.3 m
Capacitatea de ridicare	2000 kg
Inaltimea de descarcare	4.2 m
Manipulare djostic	da
Distribuitor cu doua sectii	da
Euro agatare	da
Tip cilindru	CJ2F 80/40/500
Greutatea	800 kg
Garantie	12 luni

CUPA MAXILAR 0.8m3

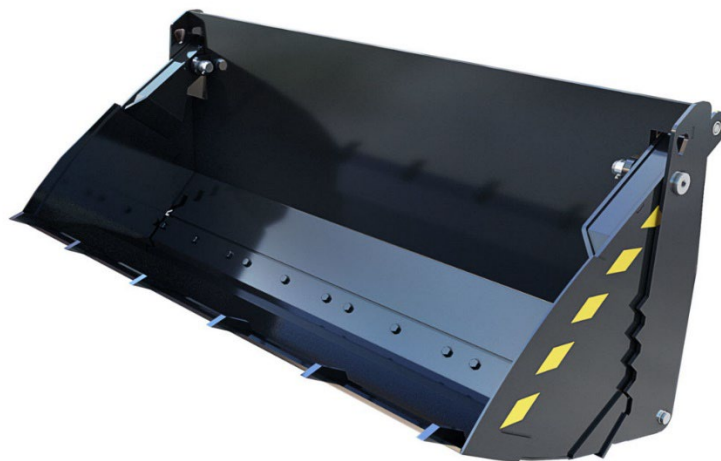

Parametrii tehnici:

CAUS CU MAXILAR 0.8m3

VOLUMUL:	0.8m3
LUNGIME:	1040mm
LATIME:	2000mm
INALTIME:	850mm
GREUTATE:	380kg
PUTERE NECESARA;	70/120cp

Dispozitiv de agățare tomberon



Parametrii tehnici:

Dispozitiv de gățare tomberon

LUNGIME:	3000 mm
LATIME:	600 mm
INALTIME:	3200 mm
GREUTATE:	400 kg
Sistem de functionare:	Hidraulic
PUTERE hidraulica:	160 bar
Latimea de agatare tomberon:	360-560 mm
Înălțimea de ridicare tomberon:	3300 mm
Capacitatea de încărcare:	500 kg

5 Tons



PRODUCT FEATURES AND OPTIONS



Capacity
7,6m³



Dimensions: 210x400x50
(Width x Length x Side Door)



Loading Capacity:
5 Tons



Extention:
: 30+30 cm or 40+40 cm



Tyre:
11.5 / 80-15.3

OPTIONS & DIFFERENCES ON THE COMPONENTS



Extra Extention Difference



Openable Side Doors Difference



Brand (Hammock) Differences



Air Brake Differences

Vidanja Meprozet MINI 3020 L



ECHIPAMENT STANDARD

- Trapa spate Ø 600 mm
 - Prize laterale astupată
 - Conductă de refulare de 2" astupată
 - Apărătoare de noroi galvanizate
 - Cric reglabil mecanic
 - Inel de remorcare înlocuibil Ø 50 mm (un alt diametru la un cost suplimentar)
 - Cuplaje de 4" tip PERROT (sau cuplaje de foc de 4")
 - Robinet hidraulic de 4".
 - Furtun de aspirație de 4" (Ø 110 mm) cu sită de aspirație, lungime 6 m
 - Sistem de frânare pneumatică cu două linii cu supapă de frână cu aer (sau sistem de franare hidraulic fara modificari de pret)
 - Frână de parcare manuală
 - Adaptare pentru asamblarea indicatorului de nivel al tubului de sticlă
- Rezervor din otel, zincat la cald
 - Inele de întărire interioare
 - Dispozitiv de siguranță la revarsare
 - Rezervor de revarsare
 - Ochelari de vedere
 - Manometru
 - Supapă de siguranță
 - Supapă cu plutitor
 - Amortizor – recuperator de ulei
 - Lingura de împrăștiat ridicată
 - Sistem de electroiluminare (LED).
 - Ușă din spate închisă permanent



TECHNICAL DATA MLI

Models and Features

MOD	 HP	 mm (in)	 mm (in)	 kg (lbs)	 nr. (0,34 kg)	 nr. (1,45 kg)	 nr.	 cat.
MLI 140	30 ► 70	1400 (55")	1550 (61")	470 (1036)	40	20	3 (XPB)	1/2
MLI 160	30 ► 70	1600 (62")	1750 (68")	490 (1080)	44	22	3 (XPB)	1/2
MLI 180	30 ► 70	1800 (71")	1950 (76")	515 (1135)	48	24	3 (XPB)	1/2