

ECOVIVI 400 GX53 LED

LARGE SIZE

Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, wall and hanging installation. Supplied with flat diffuser granting no upward light emission. Equipped with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED modular system**. Designed according to the international regulations against light pollution (standard UNI 10819 – Installation area: Zone 1). Insulation class II, Protection rating IP55.




Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Fornito con diffusore piatto per garantire assenza di emissioni di luce verso l'alto.

Provvisto di sistema modulare a LED GX53 con Kelvin impostabile certificato TÜV-CB di lunga durata ed alta efficienza. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819 – Area di installazione: Zona 1). Classe di isolamento II, grado di protezione IP55.



EV4.000.D6K

CCT SETTABLE



ECOVIVI 400 GX53 LED - COMPONENTS

IP55



ROOF made of shockproof resin material one piece only, UV-rays stabilized, rust and corrosion-free.

TETTO in un unico pezzo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.



DIFFUSER with flat shape to avoid the skyward dispersion of the luminous flux, according to the international regulations against light pollution and in particular the standard UNI 108119. Made of UV-rays stabilized polycarbonate (PC).

DIFFUSORE con configurazione piatta per evitare la dispersione verso il cielo del flusso luminoso, in ottemperanza alle norme internazionali sull'inquinamento luminoso ed in particolare la norma UNI 10819. Realizzato in policarbonato (PC) stabilizzato ai raggi UV.



Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO decorativo di connessione da fissare sul diffusore dell'apparecchio.

ECOVIVI 400 GX53 LED

EV4.000 *



Dimensions and weight

Height: 243 mm
Diameter: 480 mm
Weight: 4,6 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,1449

Moulded colours:

Black White Grey

Diffuser PC (UV treated):

Clear

GX53 LED





- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin CEILING provided with 6x TÜV-CB certified, long-life, efficient and Kelvin settable **GX53 LED lamps included**. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.

100 - 240 V				
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	6x 10W 60W	7740 lm	6500 K	.D6K
			4000 K	
			3000 K	

PHOTOMETRIC DATA SAMPLE



ECOVIVI 400 GX53 LED
6X10W

POST height 3,5mt
10x10mt area: average 37 lux


The photometric data for all the versions are available upon request or on our website.

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 636.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.


* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

ECOVIVI 400

LARGE SIZE



MADE IN ITALY

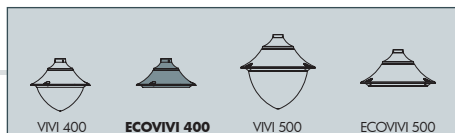

LUIGI 400
L4F.128

Pcs 1
Kg 3,7
mc 0,09

*rope not included

NEW LOT/ECOVIVI400
EV4.115

Pcs 1
Kg 4,9
mc 0,071

ECOVIVI 400
EV4.000

Pcs 1
Kg 4,6
mc 0,09

MIDIPILAR/ECOVIVI400
EV4.254

Pcs 1
Kg 5,2
mc 0,092

MARIO/ECOVIVI400
EV4.129

Pcs 1
Kg 4,9
mc 0,07

*rope not included

EKTOR 4000 MIDIPILAR/ECOVIVI400 1L EV4.371.A10	AKILLE 4000 MIDIPILAR/ECOVIVI400 1L EV4.421.A10
Pcs 1 Kg 40,5 mc 0,314	
EKTOR 3500 MIDIPILAR/ECOVIVI400 1L EV4.367.A10	AKILLE 3500 MIDIPILAR/ECOVIVI400 1L EV4.417.A10
Pcs 1 Kg 37,1 mc 0,284	

EKTOR 2500 MIDIPILAR/ECOVIVI400 1L
EV4.361.A10

Pcs 1
Kg 30,3
mc 0,235

Ø 265

EKTOR 3000 MIDIPILAR/ ECOVIVI400 1L EV4.364.A10	AKILLE 3000 MIDIPILAR/ ECOVIVI400 1L EV4.414.A10
Pcs 1 Kg 33,7 mc 0,262	

Pcs 1
Kg 33,7
mc 0,262

Ø 265

Ø 265

ECOVIVI 400

LARGE SIZE



EV4.254.C6K



EV4.364.A20.D6K



EV4.421.A30.D6K

MADE IN
ITALY

