



Catalogue
FOOD SERVICE
Chapter
COOKING

Specific model
 MGNIG-400 LPG 50-60 Hz 380-415V 3N

19003084

22/11/2021

DENOMINATION:

Rectangular GN boiling pan directly heated with gas 400 L

DESCRIPTION :


- Rectangular boiling pan with a Gastronorm rectangular well. Can be assembled on its own or with other machines. Thanks to its rigidity and functionality, it is suitable for prolonged and continuous use.
 - Cooking well with an AISI-316 stainless steel bottom with a thickness of 25/10 and AISI-304 stainless steel walls with thicknesses of between 20/10 and 25/10.
 - Front drainage tap with an insulated athermic handle.
 - AISI-304 stainless steel cover with a thickness of 15/10, balance springs; an athermic handle and an insulated cover available upon request.
 - Gauge for controlling pressure inside the double wall.
 - Manual air escape valve for depressurising the air produced in the double wall during the heating process.
 - Adjustable chromed bronze mixer with hot and cold water.
 - Weight safety valve set to 0.5 bar.
 - With a stainless steel supporting structure.
 - Equipped with stainless steel support feet with an adjustable height and a manually emptied liner filter.
 - AISI-304 exterior coating. Fine satin.
- Heat insulation guaranteed by high-density ceramic fibre plates."
- "- Indirect heating equipment: pressure control in the double wall through a safety valve set to 0.5 bar, a manual depression valve and a gauge."

POSSIBLE ACCESSORIES :

- ACCESSORIES LARGE CAP.

DIMENSIONS

X Width	2000 mm	X Gross width	2030 mm
Y Depth	900 mm	Y Gross depth	1010 mm
Z Height	850 mm	Z Gross height	1200 mm
Net Weight	340,0 kg	Gross Weight	420,0 kg
Net volume	1,530 m3	Gross volume	2,460 m3



ELECTRICITY TECHNICAL SPECIFICATIONS

Voltage	380V - 3N
Electric frequency	50Hz

GAS TECHNICAL SPECIFICATIONS

Gas type	LPG
Gas power	55,00 kW
Gas consumption	4,620 kg/h

CONNECTIONS TECHNICAL SPECIFICATIONS

Gas diameter 1	R 1/2"
Water inlet diameter	R=1/2"






Catalogue
FOOD SERVICE

Capítulo
COOKING

Modelo
MGNIG-400 LPG 50-60 Hz 380-415V 3N

19003084

22/11/2021

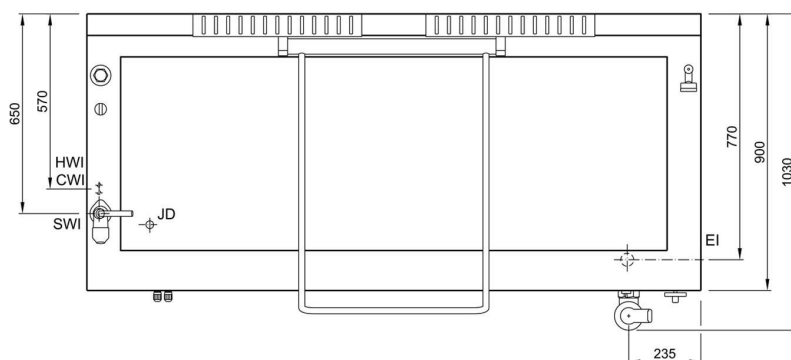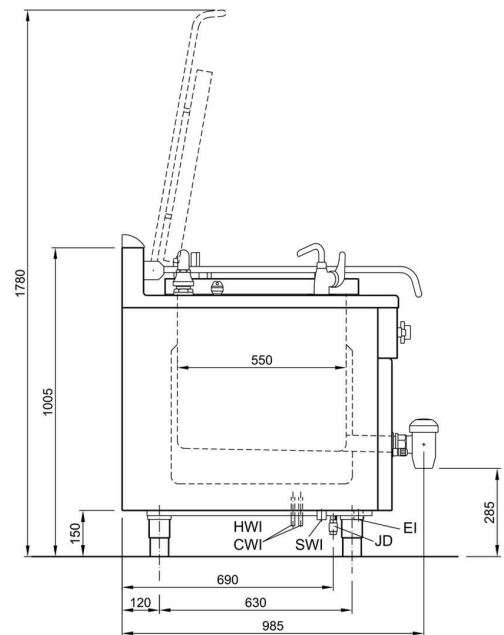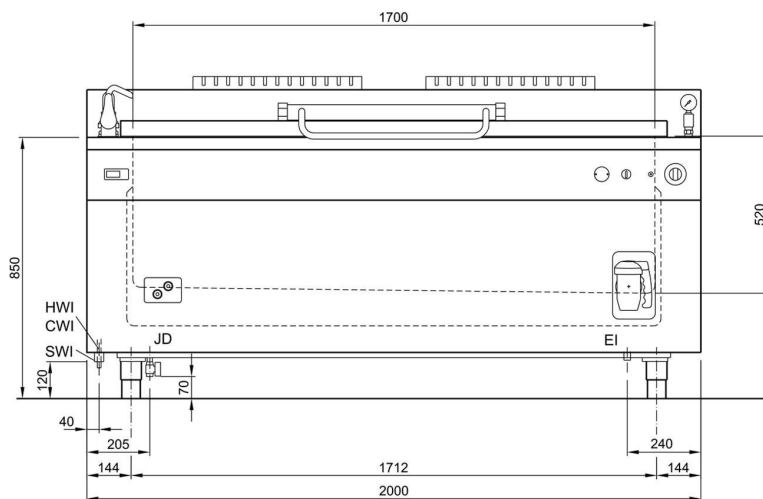

ALLACCIAMENTI - BRANCHEMENTS - CONNECTIONS

HWI -	ACQUA CALDA EAU CHAUDE HOT WATER	100 - 250 kPa (1 - 2,5 bar)	1/2" F
CWI -	ACQUA FREDDA EAU FROIDE COLD WATER	100 - 250 kPa (1 - 2,5 bar)	1/2" F
SWI -	ACQUA ADDOLCITA - OPZIONALE EAU DEMINERALISE - OPTIONAL SOFTENED WATER - OPTIONAL	100 - 250 kPa (1 - 2,5 bar)	3/4" M
JD -	SCARICO INTERCAPEDINE VIDANGE CHEMISE JACKET DRAIN		3/8" F
EI -	CAVO ELETTRICO CABLE ELECTRIQUE ELECTRIC CABLE	STANDARD - 380-415V 3N 50-60Hz 36kW OPTIONAL - 380-415V 3 50-60Hz 36kW OPTIONAL - 220-240V 3 50-60Hz 36kW	