



TOMBERON DIN PLASTIC CU ROȚI ȘI CAPAC PLAT GERMANIA




FIȘA TEHNICĂ

DIMENSIUNI	CAPACITATE (lt.)	CULOARE	COD
1260x1075x1370	1100	NEGRU	8001210
1260x1075x1370	1100	VERDE	8001211
1260x1075x1370	1100	ALBASTRU	8001212
1260x1075x1370	1100	GALBEN	8001213

DESCRIERE


Destinat colectării deșeurilor menajere (bio-degradabile, mixte) sau deșeurilor reciclabile (hârtie, sticlă, PET, metal). Este fabricat din polietilenă de înaltă densitate (HDPE), rezistent la acțiunea radiațiilor ultraviolete, precum și la coroziune chimică și la acțiunea agenților biologici. Are 4 roți pivotante la 360°, 2 roți sunt prevăzute cu frână de picior. Mecanism deschidere capac: batant, manual. Elemente ridicare pentru camion transportare deșeuri. Sarcină încărcare max. : 510 kg. Temperatură ambientală de lucru: -20 +55°C
Fabricat conform standardului EN 840 și certificatului European de Conformitate “CE”

MATERIALE

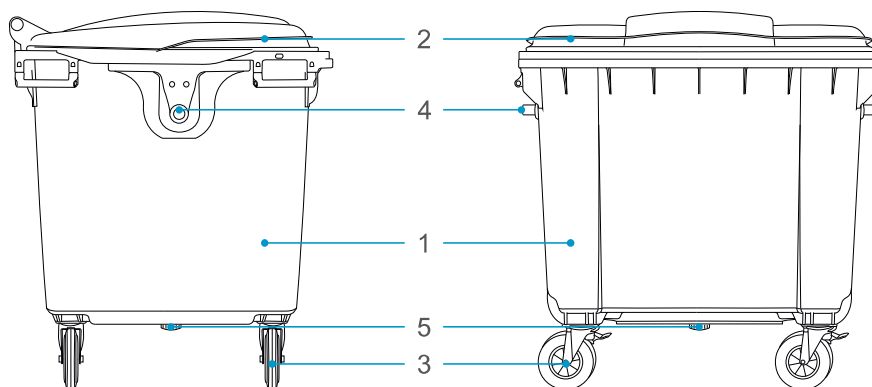




NR.	DESCRIERE	MATERIAL	CULOARE
1	CORP	HDPE	CONFORM CODULUI
2	CAPAC	HDPE	CONFORM CODULUI
3	ROATĂ	CAUCIUC	NEGRU / AURIU
4	ELEMENT RIDICARE PENTRU CAMION	HDPE	NEGRU
5	DRENAJ	HDPE	NEGRU

DIMENSIUNI

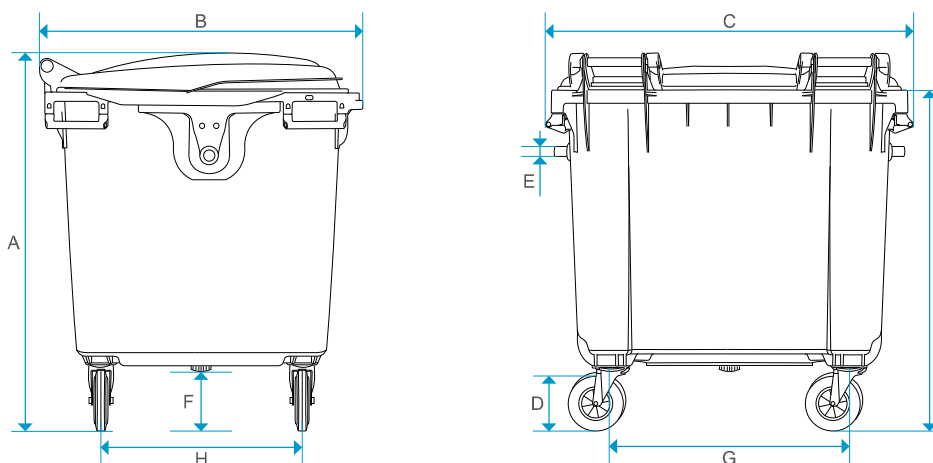

A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
1370	1075	1260	200	38
F (mm)	G (mm)	H (mm)	I (mm)	Greutate (kg)
175	835	735	1220	~ 49,0

MGB 1100 SL FLAT LID DIN VERSION WITH TRUNNIONS

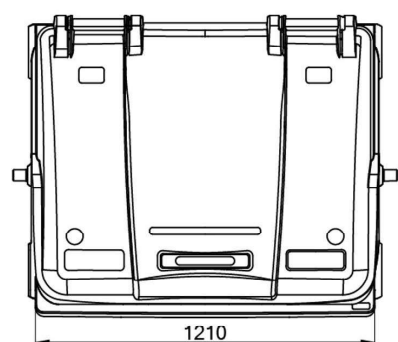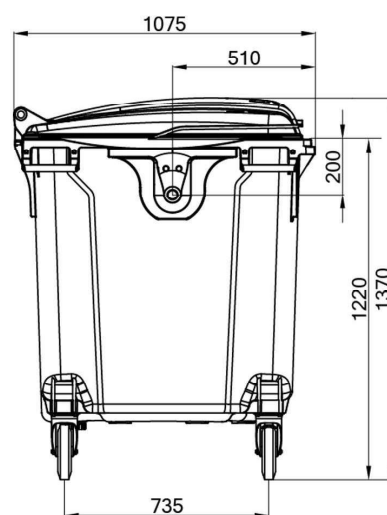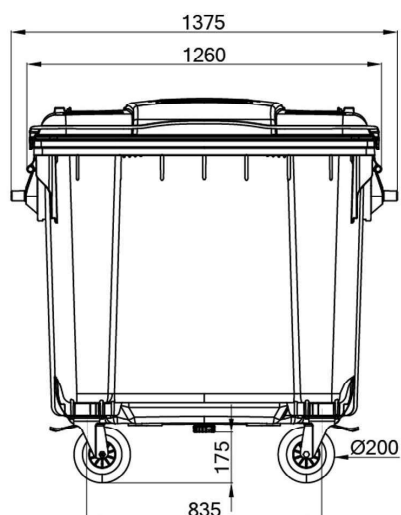

TECHNICAL DATA

Volume (L):	1,100.00
Curb weight approx. (kg):	50.00
Permissible total weight max. (kg):	510.00
Material:	HDPE, UV-stabilized
Wheels:	4 rubber wheels Ø 200 mm 2 with wheel stop
Trunnions:	with steel reinforcement tubes
Lid / Container:	4 hinge pins, lid with lip handle 4 side handles; Ø 25 mm (replaceable)
Certification:	EN 840, RAL GZ 951/1

OPTIONS

- Locking versions
- Lid apertures
- Hood apertures
- Lid variants
- Markings / Identification
- Alternative swivel castors
- Braking systems
- Noise reduction
- Lifting systems
- Special features / Accessories

The products do not contain any substances on the SVHC list of the European Chemicals Agency (ECHA).

Options

Locking versions



Gravity Lock 2/4W



Preparation for
Padlock



Triangular Lock 2/4W

Lid apertures



Packaging 155x255
rubber ring 4W



Small LiL rectangular
4W



Glass 152 rubber ring
4W



Glass 152 rubber 4W



Glass insert rubber
220 mm 4W



Small LiL Glass 4W



Small LiL square 4W

Hood apertures



Paper Hood big 4W



Paper Hood low 4W