




**TECHNICAL DRAWING  
PROBE COVER**

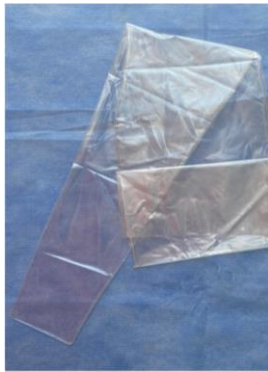

<b>PRODUCT NAME :</b>	PROBE COVER		
<b>AVAILABLE MATERIALS:</b>	Polymer Aromatic ,Ether -Based TPU		
<b>Ref. Code:</b>	<b>DIMENSION (CM):</b>		
241.10.000.01	10X61 cm		
245.10.000.01	15X122 cm		
246.10.000.01	15.100 cm		
239.10.000.01	35X3cm		
	<b>Standards</b>	<b>Reference Values</b>	<b>Results</b>
<b>Tensile Stress 100% Elongation</b>	D-412/ D-638	1500 psi 10.3 Mpa	1000 6.9 Mpa
<b>Elongation Break</b>		400-600%	500%
<b>Tear strength</b>	D-624	600 pli 105.1 kN/m	500 pli 87.6 kN/m
<b>Abrasion resistance</b>	D-1044	2.5 mg loss	2.6 mg loss
<b>Durometer</b>	ASTM D-2240	Shore 85A	-
<b>MVTR (1.0 mil, 38°C, 50% RH)</b>	E-96 E-96B	>3000g/m <sup>2</sup> -day 1000g/m <sup>2</sup> -day	<250g/m <sup>2</sup> -day n/a
<b>Tensile Strength</b>	ASTM D-412	4200 - 5200 psi 28.96 - 35.85 Mpa	-
<b>Modulus (100%)</b>	ASTM D-412	900 - 1100 psi 6.16 - 7.58 Mpa	-
<b>Width</b>	-	60 inches (1.52 meter)	-
<b>Length</b>	-	Up to 550 non-spliced linear yards (503 meter)	-
<b>PREPARED BY:</b> QUALITY CONTROL SUPERVISER			<b>APPROVED BY:</b> GENERAL MANAGER