

Extension Line

250 PSI

- ▶ For pressures up to 17 bar (250 PSI)
- ▶ Ø 3.0 x 4.1 mm tubing
- ▶ Luer lock connector



Ref		Length
M/F	M/M	
120 1030 1	120 2030 1	30 cm
120 1050 1	120 2050 1	50 cm
120 1060 1	120 2060 1	60 cm
120 1075 1	120 2075 1	75 cm
120 1090 1	120 2090 1	90 cm
120 1100 1	120 2100 1	100 cm
120 1120 1	120 2120 1	120 cm
120 1145 1	120 2145 1	145 cm
120 1150 1	120 2150 1	150 cm

Extension Line

Smallbore - 250 PSI

- ▶ For pressures up to 17 bar (250 PSI)
- ▶ Ø 1.2 x 2.5 mm tubing
- ▶ Luer lock connector



Ref		Length
M/F	M/M	
012 7050 1	012 8050 1	50 cm
012 7100 1	012 8100 1	100 cm
012 7150 1	012 8150 1	150 cm

Pressure Line

600 PSI, With Slide Clamp

- ▶ For pressures up to 41 bar (600 PSI)
- ▶ Ø 1.5 x 3.0 mm tubing
- ▶ Female luer lock connector
- ▶ Slide clamp




Ref	Connector	Length
138 5015 1	M/F	15 cm
138 5030 1	M/F	30 cm
138 5060 1	M/F	60 cm
138 5075 1	M/F	75 cm
138 5090 1	M/F	90 cm
138 5100 1	M/F	100 cm
138 5120 1	M/F	120 cm
138 5145 1	M/F	145 cm
138 5150 1	M/F	150 cm
138 5180 1	M/F	180 cm
138 5210 1	M/F	210 cm

Pressure Line

800 PSI

- ▶ For pressures up to 55 bar (800 PSI)
- ▶ Ø 1.5 x 3.0 mm tubing
- ▶ Male luer lock and female luer lock connectors

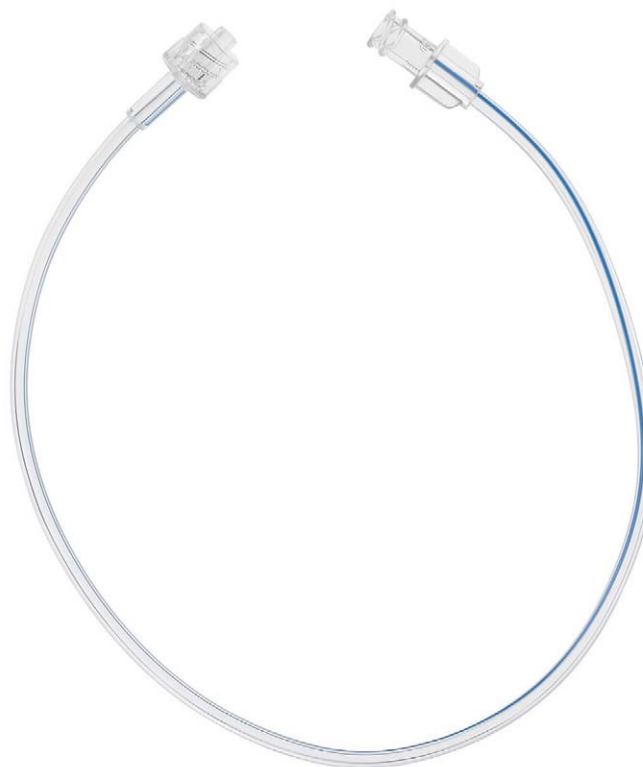


Ref		Length
M/F	M/M	
138 3030 1	138 4030 1	30 cm
138 3060 1	138 4060 1	60 cm
138 3075 1	138 4075 1	75 cm
138 3090 1	138 4090 1	90 cm
138 3120 1	138 4120 1	120 cm
138 3145 1	138 4145 1	145 cm

Pressure Line

1200 PSI

- ▶ For pressures up to 83 bar (1200 PSI)
- ▶ Ø 1.7 x 4.9 mm tubing
- ▶ Male luer lock and female luer lock connectors

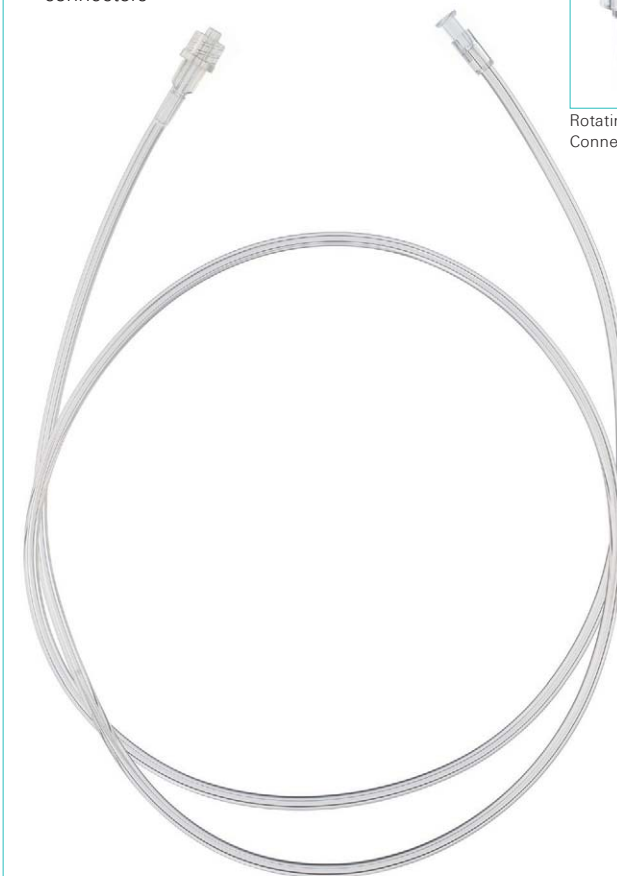

Rotating Male Connector

Ref				Length
		Rotating		
M/F	M/M	M/F	M/M	
135 3025 1	135 4025 1	135 1025 1	135 2025 1	25 cm
135 3050 1	135 4050 1	135 1050 1	135 2050 1	50 cm
135 3075 1	135 4075 1	135 1075 1	135 2075 1	75 cm
135 3100 1	135 4100 1	135 1100 1	135 2100 1	100 cm
135 3125 1	135 4125 1	135 1125 1	135 2125 1	125 cm

Three Way Stopcock

- ▶ For pressures up to 5 bar (72 PSI)
- ▶ 360° rotation
- ▶ Color coded arrows indicating flow direction
- ▶ Transparent housing
- ▶ Rotating male luer lock and two female luer lock connectors
- ▶ Lipid Resistance

Ref	Color
760 3011 1	White 
760 3031 1	Blue 
760 3041 1	Red 



Three Way Stopcock

1200 PSI

- ▶ For pressures up to 83 bar (1200 PSI)
- ▶ 180° rotation
- ▶ Arrows indicating flow direction
- ▶ Transparent housing
- ▶ Rotating male luer lock and two female luer lock connectors



Ref
760 3111 1

Manifold

- ▶ Flat with cross handle
- ▶ Pressure tested
- ▶ Arrows to indicate the direction of flow
- ▶ Clear housing for maximal visual inspection
- ▶ Color coded
- ▶ Female luer connectors

Ref	
765 0301 1	Trio
765 0501 1	Quinto



Manifold

Pressure

- ▶ For pressures up to 41 bar (600 PSI)
- ▶ Arrows to indicate the direction of flow
- ▶ Clear housing for maximal visual inspection
- ▶ Rotating male luer and female luer connectors



Ref	Position
765 1301 1	Right

Yankauer Suction Set

With Standard and Bulb Tip

- ▶ Standard and bulb tip Yankauer suction handle
- ▶ 24 Ch (Ø 5.6 x 8.0 mm) kink resistant tubing
- ▶ Available in different tubing lengths
- ▶ Cut-to-fit and funnel connectors prevents kinking and clogging
- ▶ Accepts 6.35 mm (1/4") and 9.50 mm (3/8") connections



Standard Tip

Bulb Tip

Ref			
w/Standard Tip		w/Bulb Tip	
Double Pouch	PE Band		
165 2210 1	165 0210 1	164 0210 1	Without Vacuum Control
165 3210 1	165 1210 1	164 1210 1	With Vacuum Control

Yankauer Suction Set

With 20 Ch Tip

- ▶ 20 Ch tip Yankauer suction handle
- ▶ 24 Ch (Ø 5.6 x 8.0 mm) kink resistant tubing
- ▶ Cut-to-fit and funnel connectors prevents kinking and clogging
- ▶ Accepts 6.35 mm (1/4") and 9.50 mm (3/8") connections



20 Ch Tip

20 Ch Tip With
Four Relieving
Eyes

Ref		
w/20 Ch Tip	w/20 Ch Tip w/4 Relieving Eyes	
164 6210 1	164 8210 1	
164 5210 1	164 7210 1	Without Vacuum Control
		With Vacuum Control

Suction Connecting Tube

With Standard Connector

- ▶ Standard connectors
- ▶ 24 Ch or 30 Ch kink resistant tubing
- ▶ Available in different tubing lengths



24 Ch 30 Ch

Ref	Size	Ø (mm)	Length
168 4180 1	24 Ch	5.6 x 8.0	180 cm
168 4210 1	24 Ch	5.6 x 8.0	210 cm
168 4250 1	24 Ch	5.6 x 8.0	250 cm
168 4300 1	24 Ch	5.6 x 8.0	300 cm
168 4350 1	24 Ch	5.6 x 8.0	350 cm
169 4180 1	30 Ch	7.0 x 10.0	180 cm
169 4210 1	30 Ch	7.0 x 10.0	210 cm
169 4250 1	30 Ch	7.0 x 10.0	250 cm
169 4300 1	30 Ch	7.0 x 10.0	300 cm
169 4350 1	30 Ch	7.0 x 10.0	350 cm

Suction Connecting Tube

With Standard and Kapkon Connector

- ▶ Standard and kapkon connectors
- ▶ 24 Ch or 30 Ch kink resistant tubing
- ▶ Available in different tubing lengths



With Kapkon-2 Connector

With Kapkon-1 Connector



24 Ch 30 Ch

Ref		Size	Ø (mm)	Length
Kapkon-1	Kapkon-2			
168 3180 1	168 5180 1	24 Ch	5.6 x 8.0	180 cm
168 3210 1	168 5210 1	24 Ch	5.6 x 8.0	210 cm
168 3250 1	168 5250 1	24 Ch	5.6 x 8.0	250 cm
168 3300 1	168 5300 1	24 Ch	5.6 x 8.0	300 cm
168 3350 1	168 5350 1	24 Ch	5.6 x 8.0	350 cm
169 3180 1		30 Ch	7.0 x 10.0	180 cm
169 3210 1		30 Ch	7.0 x 10.0	210 cm
169 3250 1		30 Ch	7.0 x 10.0	250 cm
169 3300 1		30 Ch	7.0 x 10.0	300 cm
169 3350 1		30 Ch	7.0 x 10.0	350 cm

B-Vak Wound Drainage System

400 ml

- ▶ For low pressure wound drainage
- ▶ Approximately 400 ml bellow capacity
- ▶ Volume indicator marks
- ▶ Easy discharge of air and contents
- ▶ Cut-to-fit connector
- ▶ Radiopaque redon drain



Ref				Drain Size	Drain I.D.
Without Trocar	With 1 Trocar	With 1 Trocar and 2 Drains	With 2 Trocars		
171 0801 1	171 0811 1	017 0906 1	171 0821 1	08 Ch	1.5 mm
171 1001 1	171 1011 1	017 0903 1	171 1021 1	10 Ch	1.8 mm
171 1201 1	171 1211 1	017 0902 1	171 1221 1	12 Ch	2.0 mm
171 1401 1	171 1411 1	017 0901 1	171 1421 1	14 Ch	2.5 mm
171 1601 1	171 1611 1	017 0904 1	171 1621 1	16 Ch	3.3 mm
171 1801 1	171 1811 1	017 0905 1	171 1821 1	18 Ch	4.0 mm