

# CASTLOADERS 2022



REV.  
01/08/22

MULTIFUNCTIONAL MACHINES WITH HYDROSTATIC SYSTEM  
OPTIONS, ATTACHMENTS



CASTGROUP



### LIFTING CAPACITY

□ 950 Kg (with counterweights)



### BOOM HEIGHT

□ 2945 mm



### ENGINE POWER


□ 26 HP



### HYDRAULIC SYSTEM


□ 42 l/min



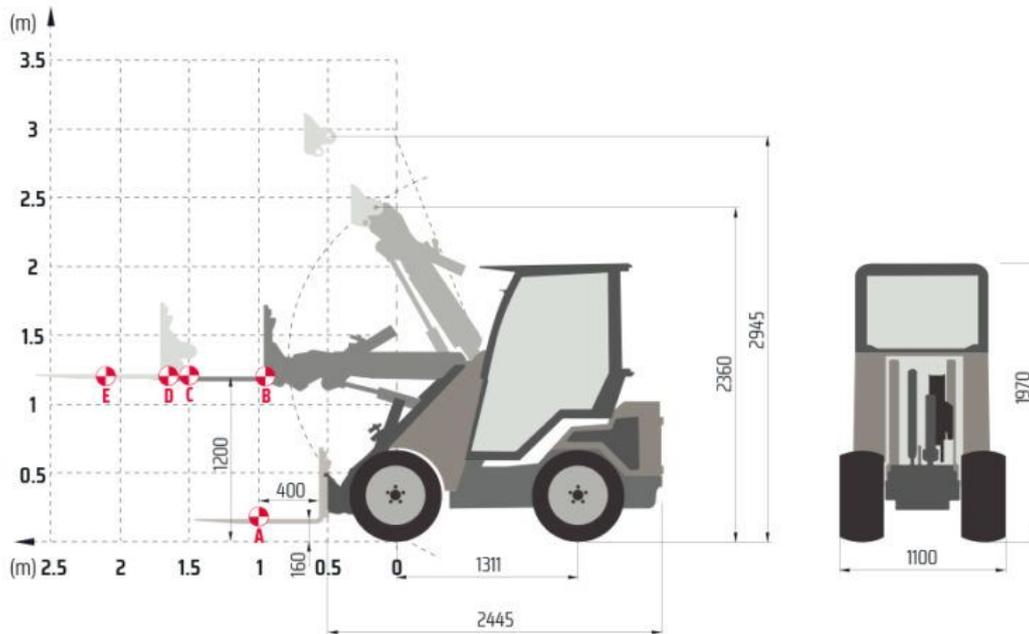


**TIPPING LOAD**

- A** Transport position
- B** Boom horizontal (without pallet fork)
- C** Boom horizontal
- D** Boom horizontal + extension
- E** Boom horizontal + extension

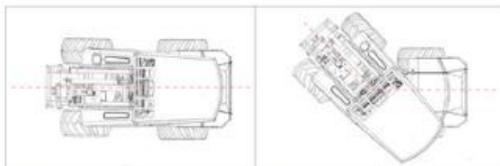

	BALLAST (200 kg)	NO BALLAST	BALLAST (200 kg)	NO BALLAST
<b>A</b>	1000 Kg	806 Kg	700 Kg	588 Kg
<b>B</b>	1180 Kg	990 Kg	860 Kg	720 Kg
<b>C</b>	840 Kg	705 Kg	610 Kg	512 Kg
<b>D</b>	760 Kg	640 Kg	550 Kg	460 Kg
<b>E</b>	620 Kg	520 Kg	450 Kg	380 Kg

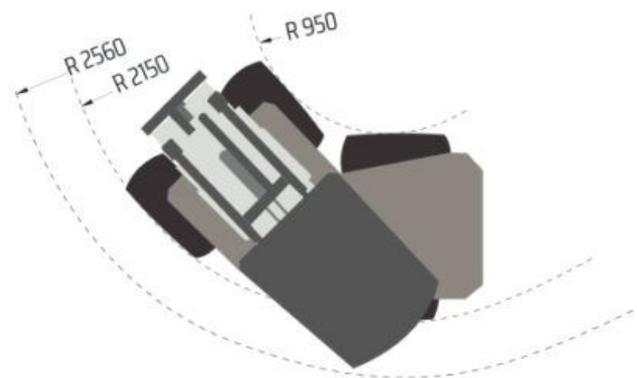

## STANDARD SET-UP

Engine	Kubota D 1105
Power Hp / Kw	26 / 18,6
Hydrostatic transmission - 4WD	Standard
Electric differential lock	Standard
Water cooling	Standard
Hydraulic system l/min	42
Joystick	5- function
12 V power outlet	Standard
Adjustable ergonomic seat with belts	Standard
"UNIVERSAL" coupling plate	Standard
Metal hoods	Standard
ROPS+FOPS protection	Standard
Telescopic boom	Standard
Tractor wheels	23x10.50-12
Weight Kg	1250

## MORE DATA

Tipping load in transport position (Kg)	806
Max pulling force (Kg)	660 @ 26x12.00-12
Breakout force with boom down (Kg)	900
Average sound power level (dB/LwA)	99
Guaranteed sound power level (dB/LwA)	101
Speed (km/h)	12

## WHEELS



TRACTOR

23x10.50-12

**OPTIONS**

4	5	1	2	0	1	7	0	Hydraulic rear outlets
---	---	---	---	---	---	---	---	------------------------

4	5	1	2	0	0	3	5	Hydraulic rear 3 point set-up for lifter
---	---	---	---	---	---	---	---	------------------------------------------

4	5	1	2	0	1	7	1	Electric floating system
---	---	---	---	---	---	---	---	--------------------------

4	5	1	2	0	1	9	2	Hydraulic Self-levelling
---	---	---	---	---	---	---	---	--------------------------

4	5	1	2	0	1	9	3	LED working lights (2 front+1 rear)
---	---	---	---	---	---	---	---	-------------------------------------

4	5	1	2	0	1	7	2	Driving lights
---	---	---	---	---	---	---	---	----------------

4	5	1	2	0	2	4	1	Rear-view mirrors
---	---	---	---	---	---	---	---	-------------------

4	5	1	2	0	1	0	5	Rear counterweights (100 Kg)
---	---	---	---	---	---	---	---	------------------------------

4	5	1	2	0	1	7	3	Integrated counterweights (95 Kg)
---	---	---	---	---	---	---	---	-----------------------------------

4	5	1	2	0	1	8	6	Cabin with heating system
---	---	---	---	---	---	---	---	---------------------------

4	5	1	2	0	1	3	3	Trailer coupling for 100 Kg rear counterweights
---	---	---	---	---	---	---	---	-------------------------------------------------

4	5	1	2	0	1	3	9	Front auxiliary electric outlet (165 W)
---	---	---	---	---	---	---	---	-----------------------------------------

4	5	1	2	0	1	7	9	Difference from 5- function joystick to 11- function joystick
---	---	---	---	---	---	---	---	---------------------------------------------------------------

## ATTACHMENTS

The Castloaders range of attachments has been designed to provide professionals with the right tools for every need, built with high quality and reliable materials.

The uses are many and the fields of application range from agriculture to construction, from breeding to gardening, from nursery to municipal, from industrial to DIY.

All our attachments are tested directly on the machines and guaranteed for a period of twelve months.

## 4 IN 1 BUCKET

Multifunctional attachment, useful for different types of applications. Thanks to the lower opening operated by a double hydraulic cylinder, it allows to move stones, building materials, leveling. The 4-in-1 bucket is supplied with teeth separately.



A	4	6	1	2	0	0	5
---	---	---	---	---	---	---	---

4 in 1 bucket  
width mm 1300  
volume l 197  
weight kg 233

## LEVELER

Ideal attachment for leveling the ground. It is made of steel with a reticular structure that allows the easy and rapid leveling of sandy and gravelly surfaces.



A	4	6	1	2	1	6	3
---	---	---	---	---	---	---	---

Leveler

# ATTACHMENTS

---

## V-PLOW

Professional attachment designed for clearing snow from streets and squares. It is hydraulically controlled and offers different tilt angles. It's equipped with absorption springs and lower edge blades in polyurethane.



A	4	6	1	2	1	2	5
---	---	---	---	---	---	---	---

V-Plow 140  
width mm 1400  
slewing angle +/- 30°  
weight kg 290

A	4	6	1	2	1	5	0
---	---	---	---	---	---	---	---

Polyurethane blade for V-Plow 140 -  
width mm 1400

## SALT/SAND SPREADER

This attachment has been designed for maintenance of roads and sidewalks in the winter period. In summertime it can be used to spread sand or fertilizing. It is equipped with agitator, hydraulic operation. It must be mounted on the back of the machine.



A	4	6	1	2	0	1	6
---	---	---	---	---	---	---	---

Salt/sand spreader  
 dimensions mm 1052x1000x1210  
 volume l 250  
 spreading width m 4/15 (\*)  
 pressure 120 bar  
 oil capacity 25 l/min  
 weight kg 90

(\*) the machine requires rear hydraulic outlets

## PROFESSIONAL SNOWBLOWER

This snow blower efficiently removes wet and dry snow from roads, yards and pedestrian areas. The chimney is electrically adjustable by 180 ° and can be managed directly by the operator at the driver's seat.



A	4	6	1	2	1	0	3
---	---	---	---	---	---	---	---

Professional snowblower  
 width mm 1000

# ATTACHMENTS

## PALLET FORK WITH SHIFTER

Made of high strength steel. Available in two versions depending on the machine model. Hydraulic control with shifter, ideal for working in small spaces with various pallet sizes.



A	4	6	1	2	1	3	5
---	---	---	---	---	---	---	---

Pallet fork with shifter  
width mm 900  
blade length mm 900  
lifting capacity kg 1000  
weight kg 150

## BACK 3 POINT LIFTER

The rear lift is indispensable for the connection of all the accessories that need to be operated from the back of the specially prepared machine. Hydraulic system.



A	4	6	1	2	1	1	9
---	---	---	---	---	---	---	---

Back 3 point lifter (\*)  
width mm 800  
lifting capacity kg 350  
weight kg 76

					28T	30T	33T
33TLX	GEN40XD	MAXO57S	MAXO57D				

(\*) the machine requires rear hydraulic outlets and provision for a lift on 30 series (Option 45120170)

## GRAB LOGGER

Attachment suitable for forestry, gardening, agriculture. High-strength steel toothed pliers designed to accommodate logs of varying sizes.



A	4	6	1	2	1	0	4
---	---	---	---	---	---	---	---

Grab logger  
weight kg 140

## ATTACHMENTS

---

### FLAIL MOWER WITH COLLECTION TANK

Ideal attachment for green professionals. Perfectly shaves the grass, both dry and wet. Adjustable cutting height. 700 liter collection, the box can easily be emptied. Hydraulic system.



A	4	6	1	2	1	3	7
---	---	---	---	---	---	---	---

Flail mower with collection tank  
width mm 1200  
volume l 700  
weight kg 330

### FLAIL MOWER

Grass shredder with great cutting power, very effective for cutting tall grass and pruning. Hydraulic operating system with high productivity in terms of time and cutting quality. Cutting height 2/12 cm.



A	4	6	1	2	0	2	8
---	---	---	---	---	---	---	---

Flail mower  
width mm 1050  
weight kg 130

A	4	6	1	2	0	3	1
---	---	---	---	---	---	---	---

30 knives kit for "fine cut"  
for mm 1050 flail mower

## LAWN MOWER

Specific lawn mower for the gardening sector and green care in general. Excellent attachment for turf maintenance in golf courses, private and public gardens. Cutting height 10/130 mm.



A	4	6	1	2	0	2	0
---	---	---	---	---	---	---	---

Lawn mower  
width mm 1200  
weight kg 170

# ATTACHMENTS

---

## HEDGE CUTTER BAR

This serrated blade bar is the ideal attachment for the maintenance of hedges with an excellent finish quality. Electric / hydraulic operation. Cutting angle electrically adjustable from horizontal to vertical quickly and with extreme ease.



A	4	6	1	2	1	1	4
---	---	---	---	---	---	---	---

Hedge cutter bar (\*)  
length mm 1600  
arm mm 1200  
tilt angle 270°  
weight kg 180

## ROTARY TILLER

This attachment operated by an excellent hydraulic system allows you to mill hard and compact soils and prepare them for sowing or planting.



A	4	6	1	2	0	3	9
---	---	---	---	---	---	---	---

Rear rotary tiller (\*)  
width mm 1050  
depth mm 150 - weight kg 100

# ATTACHMENTS

## ROTARY BRUSH

It collects dust, light debris and foliage from streets, squares, courtyards, sidewalks, warehouses. All models are equipped with a recovery tank. It does not produce dust.



A	4	6	1	2	0	1	8
---	---	---	---	---	---	---	---

Rotary brush  
width mm 1200  
weight kg 144

A	4	6	1	2	1	4	7
---	---	---	---	---	---	---	---

Hydraulic inclination 25° right/left

## FLOATING ROTARY BROOM

This attachment is suitable for removing dirt, debris, snow, from roads, sidewalks, courtyards, yards. Rotating brush movement, with nylon bristles, operated by hydraulic and floating system with horizontal tilting mode.



A	4	6	1	2	1	1	2
---	---	---	---	---	---	---	---

Floating rotary broom, adjustable (\*)  
width mm 1300  
weight kg 160

## TRENCHER

The trencher is an essential attachment for practicing canals in the ground for different applications, in agriculture, gardening, construction. The digging width is 12 cm but it can be expanded up to 20 cm thanks to the optional excavation enlarger.



A	4	6	1	2	0	5	5
---	---	---	---	---	---	---	---

T800 Trencher  
digging depth mm 800  
digging width mm 120  
weight kg 260

## EXCAVATOR

Excavator with 180° rotation, double jack and limit stop hydraulic brake, 3-point hitch with 5-point provision, independent hydraulic stabilisers, distributor with safety valves and joystick control levers. Built in quality steels, grouted and grinded pins and bushings on all articulations. It is used in agriculture, construction, gardening, municipal maintenance and roads.



A	4	6	1	2	1	6	1
---	---	---	---	---	---	---	---

Excavator  
 bucket volume l 14  
 bucket dimension mm 300  
 range of action mm 2000  
 rotation 180°  
 digging depth mm 1300  
 weight kg 250

## HIGH PRESSURE TANK



tank capacity: 500 l  
 flow: 20 l/min  
 pressure: 150 bar  
 high pressure bar with nozzles  
 Hose for high pressure: 10 m

# ATTACHMENTS

---

## PILE HAMMER



Max load: 1000 kg  
rear hydraulic tipping

## TREES CUTTER



Max diameter: 15 cm

## AUGER

Specific attachment to drill holes for planting, palisades, fences, small pillars. Ideal for breeding, agriculture, construction. Available with two different hydraulic capacities, it allows working on medium and high hardness soils, from sandy/clayey to rocky terrain.



A	4	6	1	2	0	6	2
---	---	---	---	---	---	---	---

Hydraulic auger - head T1\*  
hydraulic system 30 l/min  
pressure 250 bar  
weight of engine kg 90

## DRILLS FOR CLAY/SANDY SOILS

Drills for auger suitable for sandy and clay soils. Built with the highest quality materials, these drills represent the best tools for professionals and guarantee long life and excellent performance.



A	4	6	1	2	0	6	6
---	---	---	---	---	---	---	---

Ø mm 200 drill  
length mm 1000

# ATTACHMENTS

---

## DRILL EXTENSIONS FOR CLAY/SANDY SOILS

These drill extensions are made of high-strength steel and are suitable for all our specific drills for clay and sandy soils.



A	4	6	1	2	0	7	5
---	---	---	---	---	---	---	---

∅ mm 200 drill extension  
length mm 1000