

RTECH-PHOTOMETRY LABORATORY

Testreport : Measurement of luminous intensity distribution related to the standard
NBN-EN 13032-1; NBN-EN 13032-4; CIE 121-1996; CIE S 025/E; IES LM-79-08 and procedures PT-P-01
and PT-P-02
rue de Mons, 3 B-4000 LIEGE - Tel : 04/224.71.40 - Fax : 04/224.25.90
Measurement for Schröder group.


LED

Origin Schröder Magyarország Zrt.	Production Schröder Magyarország Zrt.	Luminaire VOLTANA EVO 1	Inclination 0°	Request # FD41030
Source				
Type LED	BIN N6	Trademark Osram	Reference OSLON SQUARE GIANT	# LEDs 16
Reflector Schreder Led assembly Narrow Assembled 0,0°				No 5296
Protector Refractor Lens				
Protector integrated lenses Lens Gaggione 5296 PC				
Laboratory observation VOLTANA EVO 1 with 16 Osram oslon square giant bin N6 (NW740) Used flux for efficiency matrix calculation = 2823 lm - CCT = 3857 K - CRI = 70,78 (see sphere test report 2021/94 on appendix).				
Purpose DOC		Sample date 01-02-2021		Sample # 40R024
Observation DOC VOLTANA EVO 1 with lenses 5296 Flux coefficient multiplicator (only for efficiency matrix): From 350 to 200 mA : 0,597 From 350 to 500 mA : 1,371 From 350 to 700 mA : 1,822 From 350 to 1000 mA : 2,401 From 350 to 1200 mA : 2,722 Fixture powered with driver Philips Xi FP 40W 0,2-0,7A SNLDAE 230V S175 sXt @200/350/500 mA Fixture powered with driver Philips Xi FP 40W 0,3-1,05A SNLDAE 230V S175 sXt @700 mA Fixture powered with driver Philips Xi FP 75W 0,3-1,05A SNLDAE 230V C133 sXt @1000 mA Fixture powered with driver Philips Xi FP 75W 0,5-1,05A SNLDAE 230V C133 sXt @1200 mA				
Notes The publication of this report in another form than the original one is not allowed without agreement of the laboratory. This report concerns type tests on one or a series of specimens. All information but the measurements results are provided by the customer.				

Asked by RCA	Measured by KDE	Approved by RLABO	Appendix 1	  226-TEST NBN EN ISO/IEC 17025 :2017	48127
-----------------	--------------------	----------------------	---------------	--	--------------

LUMINOUS INTENSITY DIAGRAM


Origin Schröder Magyarország Zrt.		Production Schröder Magyarország Zrt.		Luminaire VOLTANA EVO 1		Inclination 0°	Request # FD41030
Source	Type LED	BIN N6	Trademark Osram	Reference OSLON SQUARE GIANT	# LEDs 16	Reflector 5296	
Reflector	Schröder Led assembly Narrow Assembled 0,0°					No	5296
Matrices	481271 Φ 0-90° = 2522lm - 90-180° = 0lm					Absolute measurement	
Protector Refractor Lens	Protector integrated lenses Lens 16 x Gaggione 5296 PC						
Observation	Matrix in total flux @350 mA Electrical measurement on LED (#1) : Voltage = 44,33 V Current = 0,350 A Power = 15,51 W Electrical measurement on driver (#1) : Voltage = 230,00 V Current = 0,083 A Power = 18,33 W PF = 0,958 Total luminaire power = 18,33 W : Lm/Watt = 137,58 lm/W Driver #1 : See observations for driver details - . . 00-57-060B						
Plane	I Peak	Peak position	Index	I zero	Laboratory ambient t°	Measurement date	
5 - 175	3073	71	S	1002	24,7°	02-02-2021	
90	1253	11	D				
270	1002	0	G				

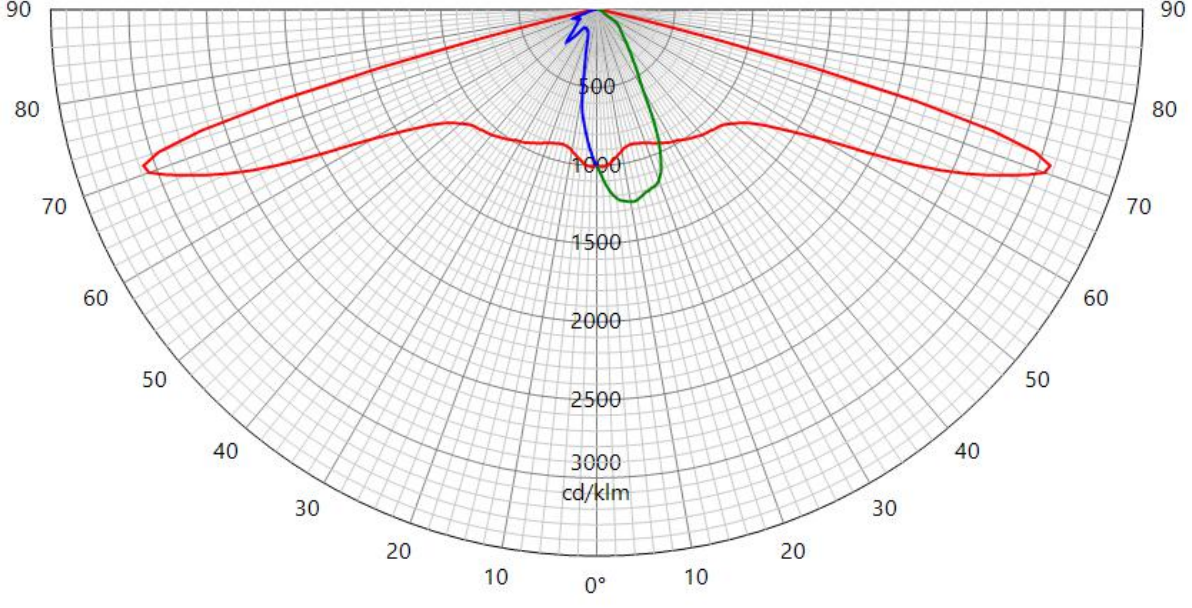

48127

LUMINOUS INTENSITY DIAGRAM


Origin Schröder Magyarország Zrt.		Production Schröder Magyarország Zrt.		Luminaire VOLTANA EVO 1		Inclination 0°	Request # FD41030
Source	Type LED	BIN N6	Trademark Osram	Reference OSLON SQUARE GIANT	# LEDs 16	Reflector 5296	
Reflector	Schröder Led assembly Narrow Assembled 0,0°					No	5296
Matrices	481272 η 0-90° = 89,3% - 90-180° = 0,0%					Relative measurement	
Protector Refractor Lens	Protector integrated lenses Lens 16 x Gaggione 5296 PC						
Observation	Matrix in efficiency @350 mA Electrical measurement on LED (#1) : Voltage = 44,33 V Current = 0,350 A Power = 15,51 W Electrical measurement on driver (#1) : Voltage = 230,00 V Current = 0,083 A Power = 18,33 W PF = 0,958 Total luminaire power = 18,33 W Driver #1 : See observations for driver details - . . 00-57-060B						
Plane	I Peak	Peak position	Index	I zero	Laboratory ambient t°	Measurement date	
5 - 175	1088	71	S	355	24,7°	02-02-2021	
90	444	11	D				
270	355	0	G				

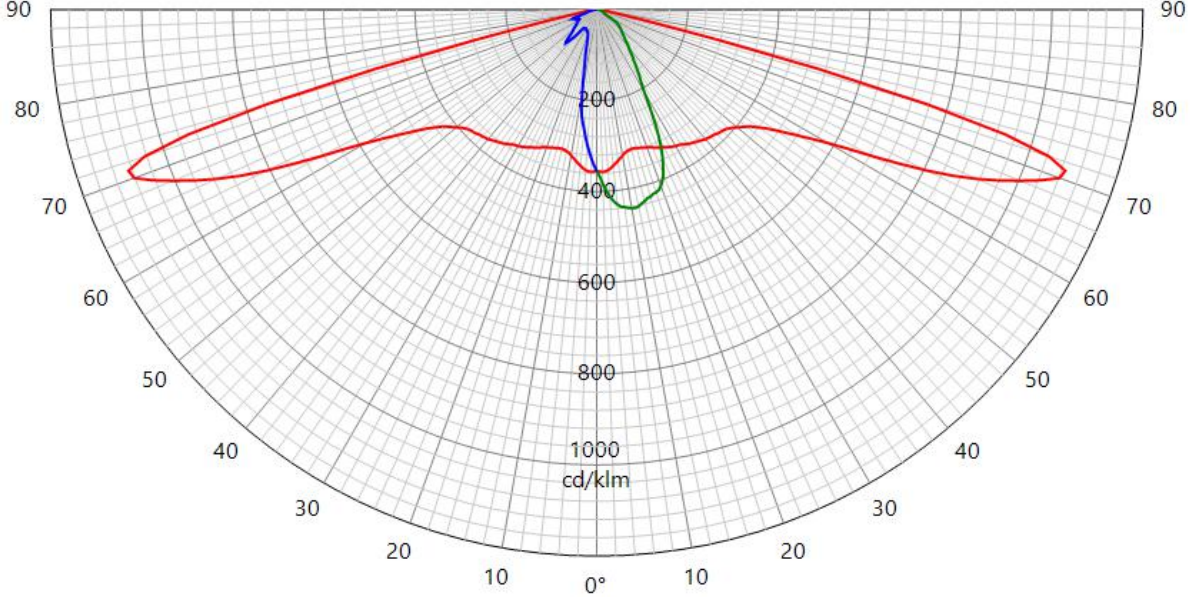

48127

LUMINOUS INTENSITY DIAGRAM


Origin Schröder Magyarország Zrt.		Production Schröder Magyarország Zrt.		Luminaire VOLTANA EVO 1		Inclination 0°	Request # FD41030
Source	Type LED	BIN N6	Trademark Osram	Reference OSLON SQUARE GIANT	# LEDs 16	Reflector 5296	
Reflector	Schröder Led assembly Narrow Assembled 0,0°					No	5296
Matrices	481273 Φ 0-90° = 1506lm - 90-180° = 0lm					Absolute measurement	
Protector Refractor Lens	Protector integrated lenses Lens 16 x Gaggione 5296 PC						
Observation	Matrix in total flux @200 mA Electrical measurement on LED (#1): Voltage = 43,66 V Current = 0,200 A Power = 8,71 W Electrical measurement on driver (#1): Voltage = 230,00 V Current = 0,053 A Power = 11,24 W PF = 0,909 Total luminaire power = 11,24 W : Lm/Watt = 133,94 lm/W Driver #1 : See observations for driver details - . . 00-57-060B						
Plane	I Peak	Peak position	Index	I zero	Laboratory ambient t°	Measurement date	
5 - 175	1834	71	S	598	24,7°	02-02-2021	
90	748	11	D				
270	598	0	G				

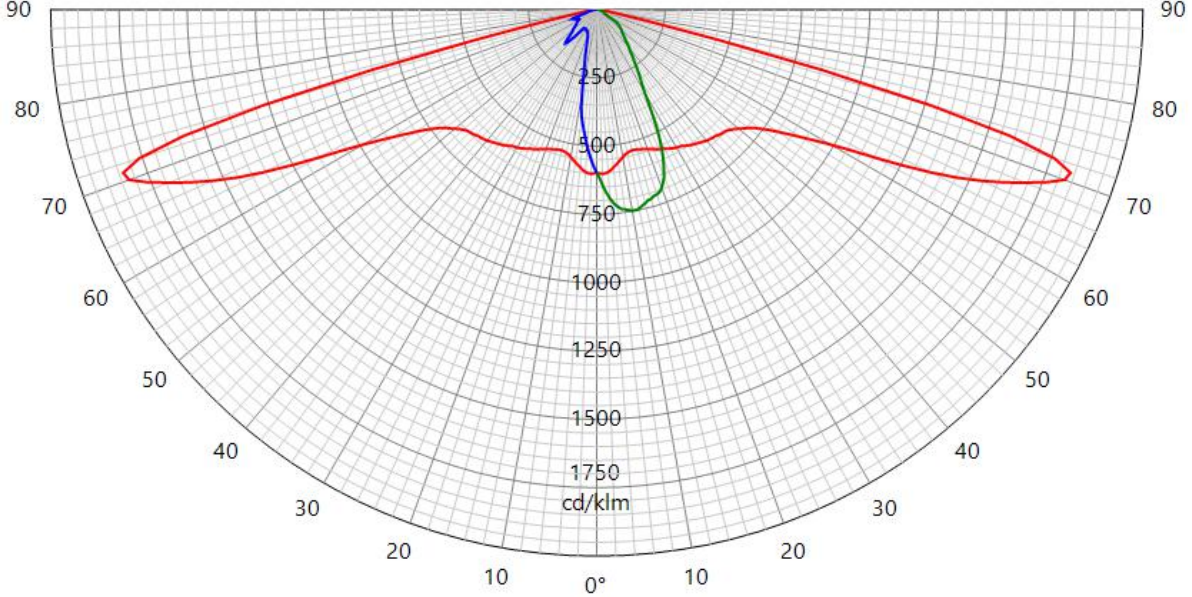

48127

LUMINOUS INTENSITY DIAGRAM


Origin Schröder Magyarország Zrt.		Production Schröder Magyarország Zrt.		Luminaire VOLTANA EVO 1		Inclination 0°	Request # FD41030
Source	Type LED	BIN N6	Trademark Osram	Reference OSLON SQUARE GIANT	# LEDs 16	Reflector 5296	
Reflector	Schröder Led assembly Narrow Assembled 0,0°					No	5296
Matrices	481274 Φ 0-90° = 3457lm - 90-180° = 0lm					Absolute measurement	
Protector Refractor Lens	Protector integrated lenses Lens 16 x Gaggione 5296 PC						
Observation	Matrix in total flux @500 mA Electrical measurement on LED (#1): Voltage = 44,82 V Current = 0,500 A Power = 22,40 W Electrical measurement on driver (#1): Voltage = 230,00 V Current = 0,114 A Power = 25,61 W PF = 0,976 Total luminaire power = 25,61 W : Lm/Watt = 135,00 lm/W Driver #1 : See observations for driver details - . . 00-57-060B						
Plane	I Peak	Peak position	Index	I zero	Laboratory ambient t°	Measurement date	
5 - 175	4213	71	S	1373	24,7°	02-02-2021	
90	1718	11	D				
270	1373	0	G				

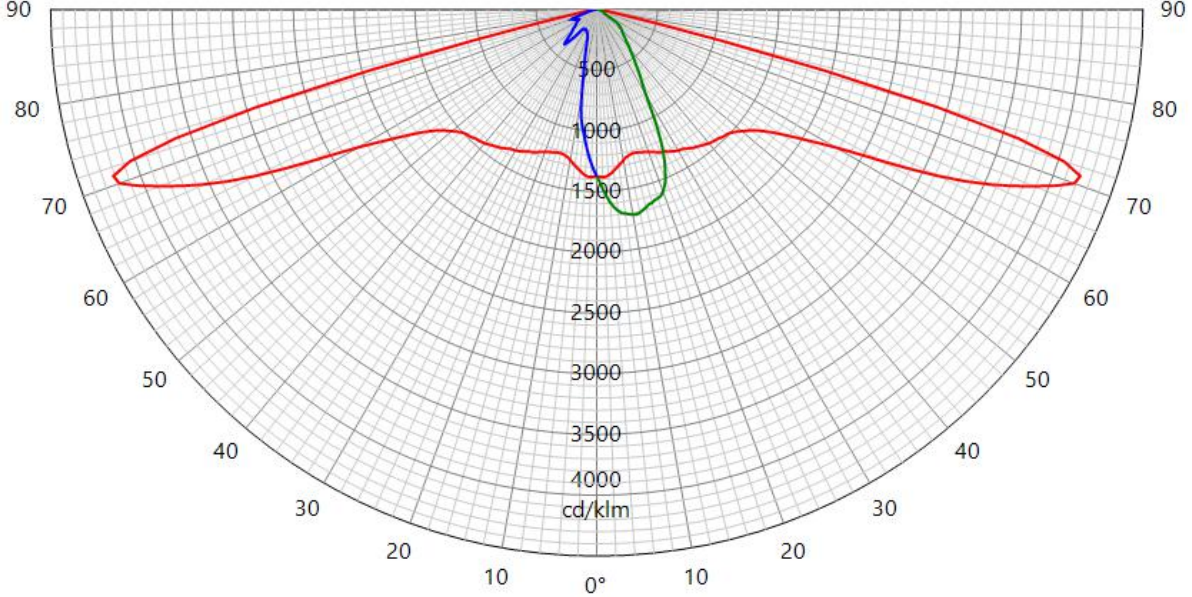

48127

LUMINOUS INTENSITY DIAGRAM

Origin Schröder Magyarország Zrt.		Production Schröder Magyarország Zrt.		Luminaire VOLTANA EVO 1		Inclination 0°	Request # FD41030
Source	Type LED	BIN N6	Trademark Osram	Reference OSLON SQUARE GIANT	# LEDs 16	Reflector 5296	
Reflector	Schröder Led assembly Narrow Assembled 0,0°					No	5296
Matrices	481275 Φ 0-90° = 4595lm - 90-180° = 0lm					Absolute measurement	
Protector Refractor Lens	Protector integrated lenses Lens 16 x Gaggione 5296 PC						
Observation	Matrix in total flux @700 mA Electrical measurement on LED (#1) : Voltage = 45,03 V Current = 0,700 A Power = 31,53 W Electrical measurement on driver (#1) : Voltage = 230,00 V Current = 0,158 A Power = 35,76 W PF = 0,984 Total luminaire power = 35,76 W : Lm/Watt = 128,49 lm/W Driver #1 : See observations for driver details - . . 00-57-060B						
Plane	I Peak	Peak position	Index	I zero	Laboratory ambient t°	Measurement date	
5 - 175	5599	71	S	1825	24,7°	02-02-2021	
90	2284	11	D				
270	1825	0	G				

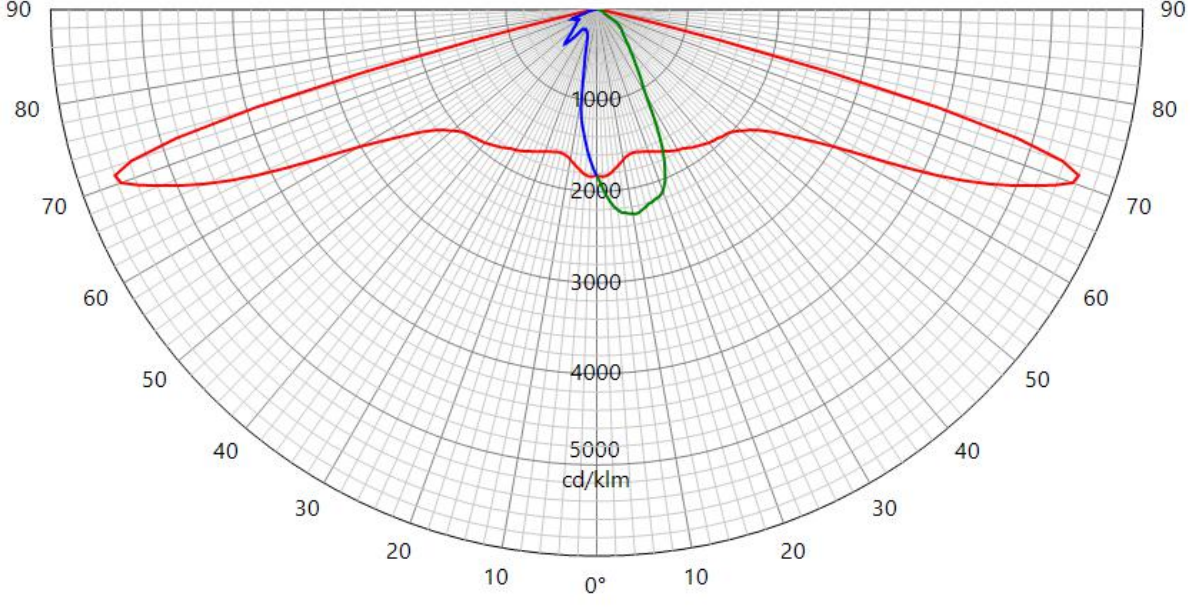


48127

LUMINOUS INTENSITY DIAGRAM

Origin Schröder Magyarország Zrt.		Production Schröder Magyarország Zrt.		Luminaire VOLTANA EVO 1		Inclination 0°	Request # FD41030
Source	Type LED	BIN N6	Trademark Osram	Reference OSLON SQUARE GIANT	# LEDs 16	Reflector 5296	
Reflector	Schröder Led assembly Narrow Assembled 0,0°					No	5296
Matrices	481276 Φ 0-90° = 6055lm - 90-180° = 0lm					Absolute measurement	
Protector Refractor Lens	Protector integrated lenses Lens 16 x Gaggione 5296 PC						
Observation	Matrix in total flux @1000 mA Electrical measurement on LED (#1): Voltage = 45,56 V Current = 1,000 A Power = 45,52 W Electrical measurement on driver (#1): Voltage = 230,00 V Current = 0,227 A Power = 51,20 W PF = 0,981 Total luminaire power = 51,20 W : Lm/Watt = 118,26 lm/W Driver #1 : See observations for driver details - . . 00-57-060B						
Plane	I Peak	Peak position	Index	I zero	Laboratory ambient t°	Measurement date	
5 - 175	7378	71	S	2405	24,7°	02-02-2021	
90	3009	11	D				
270	2405	0	G				
							48127

LUMINOUS INTENSITY DIAGRAM

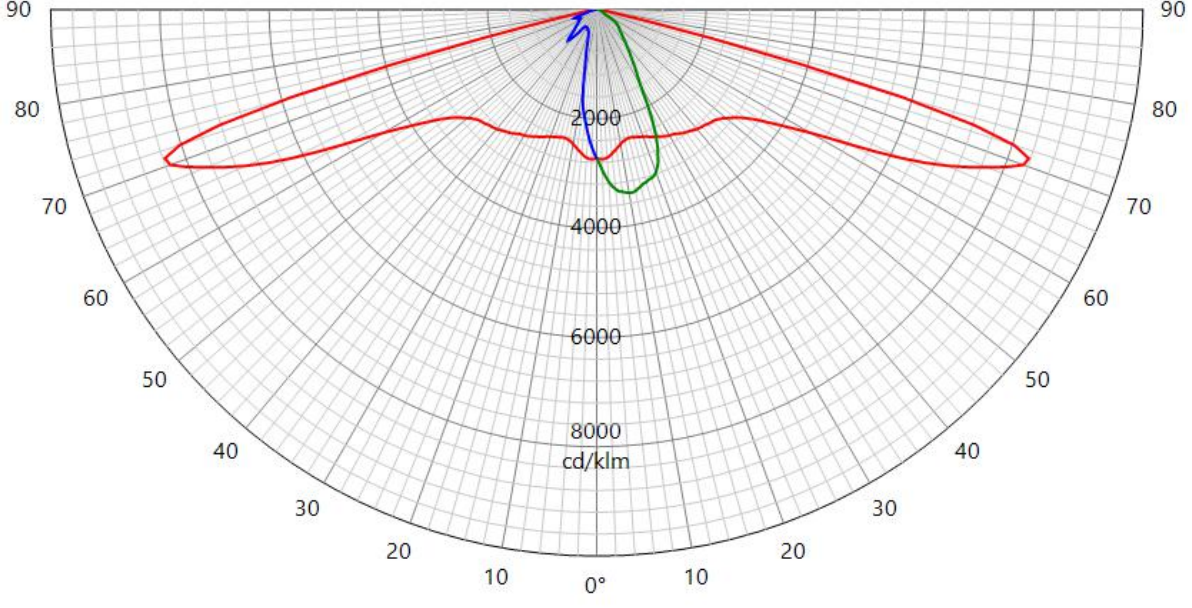Origin Schröder Magyarország Zrt.		Production Schröder Magyarország Zrt.		Luminaire VOLTANA EVO 1		Inclination 0°	Request # FD41030
Source	Type LED	BIN N6	Trademark Osram	Reference OSLON SQUARE GIANT	# LEDs 16	Reflector 5296	
Reflector	Schröder Led assembly Narrow Assembled 0,0°					No	5296
Matrices	481277 Φ 0-90° = 6864lm - 90-180° = 0lm					Absolute measurement	
Protector Refractor Lens	Protector integrated lenses Lens 16 x Gaggione 5296 PC						
Observation	Matrix in total flux @1200 mA Electrical measurement on LED (#1): Voltage = 45,88 V Current = 1,200 A Power = 55,10 W Electrical measurement on driver (#1): Voltage = 230,00 V Current = 0,272 A Power = 61,58 W PF = 0,984 Total luminaire power = 61,58 W : Lm/Watt = 111,47 lm/W Driver #1 : See observations for driver details - . . 00-57-060B						
Plane	I Peak	Peak position	Index	I zero	Laboratory ambient t°	Measurement date	
5 - 175	8364	71	S	2727	24,7°	02-02-2021	
90	3411	11	D				
270	2727	0	G				
							
							48127

INFORMATION

Measurement fulfil Standards:

NBN-EN 13032-1
NBN-EN 13032-4
NBN-EN 17025:2017
CIE 121-1996
LM79-08
CIE S 025

Measurement quantities measured:

Light distribution in relative or absolute photometry
Led alone cold lumen package
Led CCT and CRI
Power consumption of the fitting
Lm/watt

Electrical measurement, if not specified:

Primary values are AC with 50Hz frequency
Secondary values on SSL are DC

CCT, CRI and chromaticity coordinates: are measured in Ulbricht sphere.
If specified Main test report refer to sphere extra test report.

Light distribution are measured on gonio. If not otherwise specified, measurement is done at 50 Hz

Number of hours operated prior to measurement: if not otherwise specified, 0 hours (no aging).

Stabilization time: If not otherwise specified, a minimal stabilization time of 0.5 hour is applied; and measurement will start when it exists no more variation above 0.5% in 15 minutes

Total operating time of the product including stabilization:
45 minutes have to be added by measurement.
Minimal operating time is 75 minutes

Luminous intensity distribution: available on electronic file with
.mat format (internal Schröder format)
.ldt format (European standard)
.IES format (American standard)

Statement of uncertainties (K=2, 95% of confidence level):
Uncertainties calculated based on a typical Schröder fitting and PCBA

Intensity measurement: +/- 3%
Angle: +/- 0.5°
Flux: +/- 2.5%
Electrical DC
Power: +/- 0.15%
Voltage: +/- 0.10%
Current: +/- 0.20%
Electrical AC
Power: +/- 0.20%
Voltage: +/- 0.10%
Current: +/- 0.15%
Temperature: +/- 0.65%

ISP2000	JETI	
CCT:	+/- 5%	+/-7.5%
CRI:	+/- 2%	+/-2.75%
x/y:	+/- 2%	+/-4.6%

lm/Watt: +/-3.4%

Measuring instruments in use:

Gonio 1

Type C with Moving mirror

Manufacturer: LMT Lichtmesstechnik GmbH Berlin, Helmholtzstrasse 9 10587 Berlin, Germany

Type: GO-DS 2000

Calibration: traceable to PTB (Physikalisch-Technische Bundesanstalt D-Braunschweig) and METAS (Federal Institute of Metrology, CH-Bern)

Photometric test distance: By default 10 meter, on request 30 meter.

Gonio 2

Type C

Manufacturer: Technoteam Bildverarbeitung, Werner-von-Siemens-Strasse 5 98693 Ilmenau, Germany

Calibration: traceable to BIPM (Bureau International des Poids et Mesures F-Sèvres)

Photometric test distance: Near Field

Sphere n°1

4p geometry

Manufacturer: LMT Lichtmesstechnik GmbH, Helmholtzstrasse 9 10587 Berlin, Germany

Type: UL2000 + U1000 V-Lambda photometer

Calibration: traceable to BIPM (Bureau International des Poids et Mesures F-Sèvres)

Sphere n°2

4p geometry

Manufacturer: Instrument Systems GmbH, Neumarkter Str. 83, 81673 Muenchen, Germany

Type ISP2000 + Spectroradiometer CAS120 and CAS140

Calibration: traceable to NIST

Colorimetric portable spectroradiometer

Manufacturer: JETI Technische Instrumente GmbH, Tatzendpromenade 2 07745 Jena

Type: SPECBOS 1201

Calibration: traceable to NIST

Multimeters

Manufacturer: Agilent

Type: 34401A

Calibration: traceable to BIPM (Bureau International des Poids et Mesures F-Sèvres)

Wattmeters

Manufacturer: Yokogawa

Type: WT210 and WT310

Calibration: traceable to BIPM (Bureau International des Poids et Mesures F-Sèvres)

Thermometers

Amarell Precision

Type: Liquid in glass N63833

Calibration: traceable to LBT (Laboratoire Belge de Thermométrie)

End of test report