

Power Supply	100~240VAC, 50/60Hz, 200VA
Flow Rate	0.1~10ml/s
Pressure Limit	325PSI
Auto Filling Rate	8ml/s
Air Purge Rate	1.0~9.9ml/s
Piston Rod Speed	9.9ml/s
Phases	6
Injection Programs	2000
Injection Records	2000
Volume	1~200ml
Multiple Language Use	er Interface

#### High Quality Disposables



· 200ml Syringe for Contrast

## antmed<sup>™</sup>

### Shenzhen Antmed Co., Ltd.

18 Jinhui Ave., Pingshan New District, Shenzhen 518122, China Tel: +86 755 8606 0992 Fax: +86 755 8606 0991 E-mail: info@antmed.com http://www.antmed.com









## CT Single Injector



## CT Single Injector

Introducing an all-new ImaStar CT Single Injector, offering an extended list of product features, reliable performance, and a safe patient experience.



#### Color Touch Screens

Clear and concise information display to ensure user operational confidence

Bluetooth communication


### Injection Record Storage

Stores up to 2000 injection history records




#### Real-Time Pressure Curve

· Display provides real-time pressure graph for injection monitoring

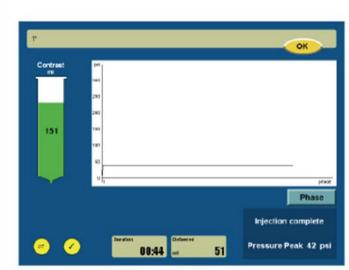

#### Multiple Injection Phases

· Offers 6 injection phases(such as hold, pause, etc) to meet demands of complex imaging needs

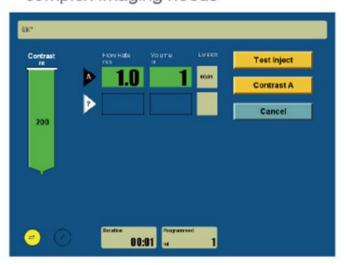

### A Variety of **Configuration Options**

- · Stores up to 2000 customized injection programs
- · Program storage capacity can be increased based on user needs



- · To ensure the safety of the injection, there is a double confirmation feature with separate prompts to confirm air purging and injection ready status before any injection
- · Automatically slows down the injection when approaching to pressure limit
- · Injection stops when pressure limit is reached. Alerts with both light and sound
- · Waterproof injector head design to minimize damage from contrast and saline leakage
- · Ability to pause and resume while injection is underway



Power Supply	100~240VAC, 50/60Hz, 200VA
Flow Rate	0.1~10ml/s
Pressure Limit	325PSI
Auto Filling Rate	8ml/s
Air Purge Rate	1.0~9.9ml/s
Piston Rod Speed	9.9ml/s
Phases	6
njection Programs	2000
njection Records	2000
Volume	A: 1~200ml
	B: 1~200ml
Multiple Language Us	er Interface

#### **High Quality Disposables**



200ml Syringe for Contrast200ml Syringe for Saline

## **antmed**<sup>m</sup>

## Shenzhen Antmed Co., Ltd.

18 Jinhui Ave., Pingshan New District, Shenzhen 518122, China Tel: +86 755 8606 0992 Fax: +86 755 8606 0991 E-mail: info@antmed.com http://www.antmed.com





## CT Dual Injector



## CT Dual Injector

right atrium and right ventricle in the same image

Introducing an all-new ImaStar CT dual injector, offering an extended list of product features, reliable performance, and a safe patient experience.



#### Color Touch-Screen

- · 12.1 and 7" color touch-screens for easy operation
- Clear and concise information display to ensure user operational confidence

#### Injection Record Storage

· Stores up to 2000 injection history records



#### **Auto Detect**

· Syringe detection feature automates air purging and piston rod operation


#### Connect to Other Imaging Equipment

- · Connect with other imaging equipment for enhanced imaging, use contrast more efficiently and minimize radiation
- Option

Bluetooth communication


#### Real-time Pressure Curve

· Display provide real-time pressure monitoring curve

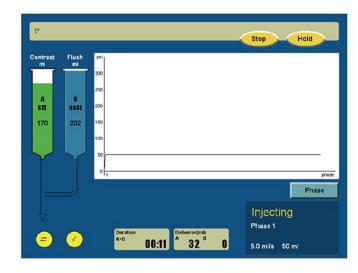

#### A Variety of **Configuration Options**

- · Stores up to 2000 customized injection programs
- Program storage capacity can be increased based on user needs

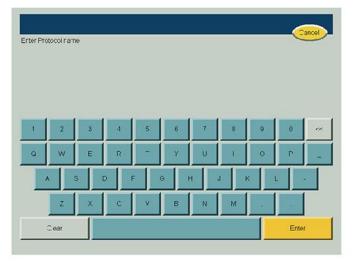

- · To ensure the safety of the injection, there is a double confirmation feature with separate prompts to confirm air purging and injection ready status before any injection
- · Automatically slows down the injection when approaching to pressure limit
- · Injection stops when pressure limit is reached. Alerts with both light and sound
- · Waterproof injector head designed to minimize damage from contrast and saline leakage
- · Ability to pause and resume while injection is underway



Power Supply	100~240VAC, 50/60Hz, 500VA
Flow Rate	0.1~45ml/s
Pressure Limit	1200PSI
Auto Filling Rate	8.0ml/s
Air Purge Rate	0.5~9.9ml/s
Piston Rod Speed	9.9ml/s
Rise Time	0.1-9.9sec
Injection Delay	0.0-99.9sec
X-Ray Delay	0.0-99.9sec
Phases	4
Injection Programs	500
Injection Records	500
Volume	1~150ml
Multiple Language User Interface	

#### **High Quality Disposables**



· 150ml Syringe for Contrast

### antmed

### Shenzhen Antmed Co., Ltd.

18 Jinhui Ave., Pingshan New District, Shenzhen 518122, China Tel: +86 755 8606 0992 Fax: +86 755 8606 0991 E-mail: info@antmed.com http://www.antmed.com





# DSA Injector



## **DSA** Injector

equipment for enhanced imaging

use contrast more efficiently and

minimize radiation

Introducing an all-new ImaStar DSA Injector, offering an extended list of product features, reliable performance, and a safe patient experience.



#### Color Touch-Screen

- · 12.1"and 12.1 color touch-screens for easy operation
- · Clear and concise information display to ensure user operational confidence

### Injection Record Storage


· Stores up to 500 injection history records

Bluetooth communication



## Injection Ready Status

· Choose between single injection or multiple injection program

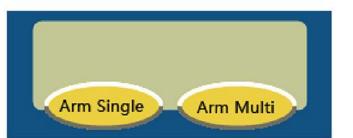

#### A Variety of **Configuration Options**

- · Stores up to 500 customize injection programs
- · Program storage capacity can be increased based on user needs



### Multiple **Operation Functions**

· Offers 4 injection phases to meet demands of complex imaging needs

- · To ensure the safety of the injection, there is a double confirmation feature with separate prompts to confirm air purging and injection ready status before any injection
- · Automatically slows down the injection when approaching to pressure limit
- · Injection stops when pressure limit is reached. Alerts with both light and sound
- · Waterproof design inside the head to minimize damage from contrast media and saline leakage



Power Supply	100~240VAC, 50/60Hz, 200VA
Flow Rate	0.1~10ml/s
Pressure Limit	325PSI
Auto Filling Rate	8ml/s
Air Purge Rate	A: 1.0~9.9ml/s B: 2.5~9.9ml/s
Piston Rod Speed	9.9ml/s
Injection Delay	1~300s
Scan Delay	1~300s
Pause Phase	1~900s
Phases	6
Injection Programs	100
Injection Records	100
Volume	A: 1~65ml
	B: 1~115ml
Multiple Language User	Interface



· DC Power

**High Quality Disposables** 



65ml Syringe for Contrast115ml Syringe for Saline

## antmed

## Shenzhen Antmed Co., Ltd.

18 Jinhui Ave., Pingshan New District, Shenzhen 518122, China Tel: +86 755 8606 0992 Fax: +86 755 8606 0991 E-mail: info@antmed.com http://www.antmed.com





# MR Injector




## MR Injector

Introducing an all-new ImaStar MR Injector, offering an extended list of product features, reliable performance, and a safe patient experience.



- Independent Dual **Motor Drive Systems**
- · Dual motor drive capability for time saving loading and filling of syringes
- · Allows independent injection of contrast and saline

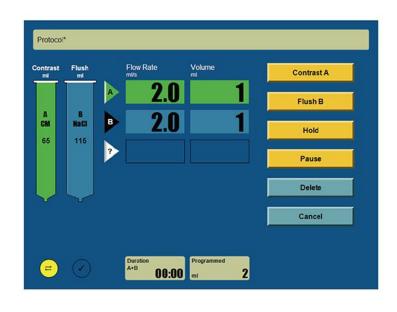



#### Color Touch-Screen

- · 12.1"color touch-screens for easy operation
- · Clear and concise information display to ensure user operational confidence

#### Injection Record Storage

Bluetooth


communication

· Stores up to 100 injection history records



## Real-time Pressure Curve

· Display provides real-time pressure graph for injection monitoring

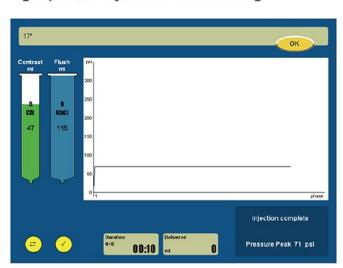


#### A Variety of **Configuration Options**

- · Stores up to 100 customized injection programs
- Program storage capacity can be increased based on user needs



#### **KVO Function**

- · Independent KVO (Keep Vein Open) ensures efficient examination procedure
- Flexible KVO interval time settings
- · 115ml saline syringe capacity allows for longer KVO

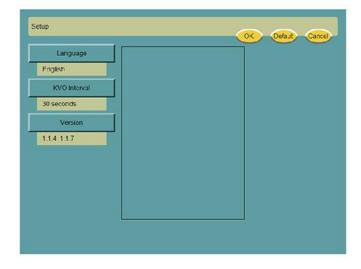

- · To ensure the safety of the injection, there is a double confirmation feature with separate prompts to confirm air purging and injection ready status before any injection
- · Automatically slows down the injection when approaching to pressure limit
- · Injection stops when pressure limit is reached. Alerts with both light and sound
- · Waterproof design inside the head to minimize damage from contrast media and saline leakage