





GRC20

TWO SECTION EASY REPAIR CLAMP

TECHNICAL DETAILS

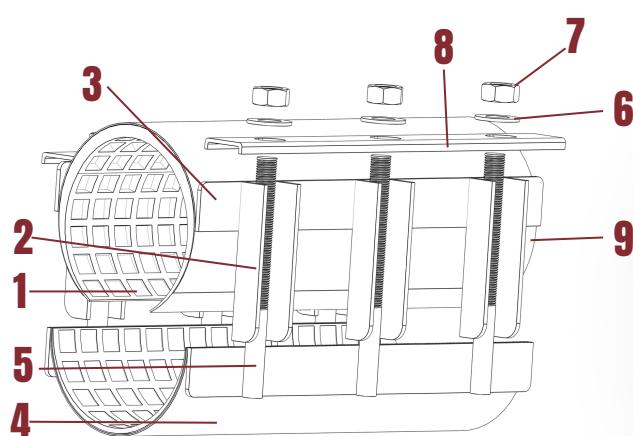

No	Description	Explain	Following types of damage can be repaired
1	Gasket	EPDM,NBR or Viton.	 Connection of pipes with angular deflection
2	Guide Sheet	Stainless steel AISI 304 or AISI 316.	 Connection of pipes with movement
3	Support Sheet	Stainless steel AISI 304 or AISI 316.	 Repair of pipes with cracks
4	Body	Stainless steel AISI 304 or AISI 316.	 Connection of pipes with different diameter
5	Bolt	Stainless steel AISI 304 or AISI 316.	 Connection of pipes with gaps between
6	Washer	Stainless steel AISI 304 or AISI 316.	 Connection of misaligned pipes
7	Nut	Stainless steel AISI 304 or AISI 316.	
8	"U" Sheet	Stainless steel AISI 304 or AISI 316.	
9	Armour Sheet	Stainless steel AISI 304 or AISI 316.	

Sealing gasket

- EPDM
Suitable for water, air and some chemical products. From -20°C to 100°C.
- NBR
Suitable for fuel, gas and some hydrocarbons. From -20°C to 80°C.
- Viton
Suitable for several chemicals. From -40°C to 220°C.

Advantages



Easy to fit



Light weight



Fast to fit



Storage space saving



Cost saving installation

RANGE	Bolt	Torque	Working Pressure
DN50-DN200	M14	110-130 NM	16bar - 232PSI
DN200-DN350	M16	130-150 NM	16bar - 232PSI
DN350-DN600	M16	130-150 NM	10bar-145PSI
DN600-DN800	M18	150-170 NM	10bar-145PSI

*Large ,different diameters and bigger lengths can be produced on request, please ask our sales department.