




Ducted PP Fume Hood



LED Display

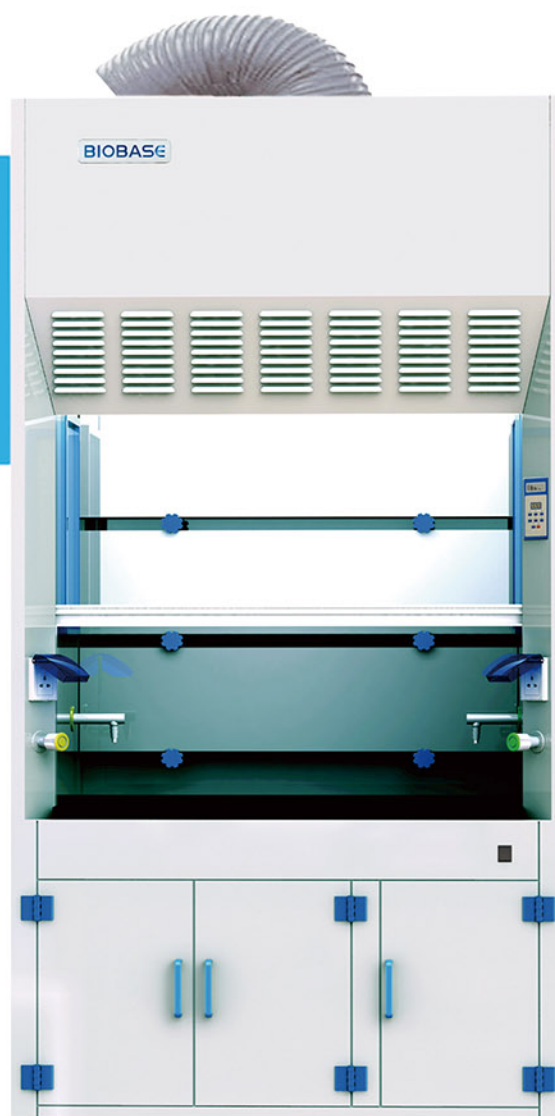

PP Sink
resistant to acid,
alkali and anti-corrosion



Waterproof Socket



Water&Gas
Remote Control

ADVANTAGE

1. It is safer to use anti-corrosive water tap.
2. Microprocessor control system, LED display.
3. With memory function in case of power-failure.
4. Made of porcelain white PP, resistant to acid, alkali and anti-corrosion.
5. Front window which is made of 5mm thick transparent toughened glass maximize light and visibility inside the fume hood, providing a bright and open working environment.

TECHNICAL PARAMETERS

Model		FH1000(P)	FH1200(P)	FH1500(P)	FH1800(P)
External Size (W*D*H)		1047*800*2450mm	1247*800*2450mm	1547*800*2450mm	1847*800*2450 mm
Internal Size (W*D*H)		787*560*700mm	987*560*700mm	1287*560*700mm	1587*560*700 mm
Work Surface Height		820mm			
Max Opening		740mm			
Air Velocity		0.3~0.8m/s			
Noise		≤68dB			
Exhaust Duct		4.3meters,Φ250mm			
LED Lamp		12W*2	12W*2	22W*2	18W*2
Blower		Built-in PP centrifugal blower (2 blowers for FH1800(P) only); Speed adjustable			
Front Window		Resistant to acid and alkali, Manual, 5mm toughened glass, height adjustable			
Power Supply		AC220V±10%, 50/60Hz; 110V±10%, 60Hz			
Consumption		400W	400W	500W	700W
Material	Main Body	Made of Porcelain white PP, thickness 8mm, resistant to strong acid, alkali and anti-corrosion			
	Work Table	Chemical resistant phenolic resin			
Standard Accessory		LED light;Work table:Chemical resistant phenolic resin; 4.3 meters PVC duct (2 Pcs of 4.3 meters PVC duct for FH1800(P) only), Diameter: 250mm; Pipe strap*2(4 Pcs for FH1800(P) only); RVV power cord (3*1.0mm**3000mm); Base cabinet; Waterproof socket*2; Tail insert; Water tap(PP); Gas tap(PP); Water Sink; PP centrifugal blower*1(2 for FH1800(P) only)			
Optional Accessory		PP work table, epoxy resin board or ceramic board;Active carbon filter; Outer PP centrifugal blower *1 (only need to select when the duct more than 4m,2 for FH1800(P) only); Splicable base cabinet(only not for FH1800(P))			
Gross Weight	Main Body Base Cabinet	137kg 89kg or 80kg(Spllicable)	155kg 99kg or 90kg(Spllicable)	180kg 114kg or 102kg(Spllicable)	206kg 140kg
Package Size (W*D*H)	Main Body	1188*938*1612mm	1388*938*1612mm	1688*938*1612mm	1988*938*1612mm
	Base Cabinet	1188*888*1000mm or 1200*1000*450mm (Spllicable)	1388*888*1000mm or 1400*1000*450mm (Spllicable)	1688*888*1000mm or 1700*1000*450mm (Spllicable)	1988*888*1000mm

Oven

Constant-Temperature Drying Oven

Features:

- * External material: cold-rolled steel with anti-bacteria powder coating.
- * Stainless steel inner chamber, round angle structure, adjustable shelves.
- * PID control with LED display, soft touch operational key, timing function and over-temperature protection.
- * Door with double-layer tempered glass observation window, adjustable air-tight buckle lock, and silicon rubber seal, which provide good seal ability and efficiently prevent heat loss.



Technical Parameters:

Model	BOV-T30C	BOV-T70C	BOV-T140C	BOV-T270C
Capacity	43L	70L	137L	270L
Temp. Range	50~200℃			
Temp. Fluctuation	±1℃			
Ambient Temp.	5~40℃			
Timing Range	1~9999min			
Shelves No.	2 pcs		3 pcs	
Consumption	850W	1000W	2000W	3000W
Power Supply	Standard: 220V±10%, 50/60Hz; Optional: 110V±10%, 60Hz			
Internal Size(W*D*H) mm	350*350*350	400*390*450	500*500*550	600*600*750
External Size(W*D*H) mm	635*615*552	680*653*631	830*665*772	930*765*972
Package Size(W*D*H) mm	780*750*700	870*700*800	960*780*950	1060*880*1150
Gross Weight(kg)	60	70	105	145

Forced Air Drying Oven

Features:

- * External material: cold-rolled steel with anti-bacteria powder coating.
- * Stainless steel inner chamber, round angle structure, adjustable shelves.
- * Double-layer glass observation window, adjustable airtight buckle lock.
- * PID control with LED display.
- * Over-temperature protection.



Technical Parameters:

Model	BOV-T25F	BOV-T50F	BOV-T105F	BOV-T200F
Capacity	25L	54L	108L	212L
Temp. Range	50~200℃			
Temp. Precision	0.1℃			
Temp. Fluctuation	±1℃			
Ambient Temp.	5~40℃			
Timing Range	1~9999min			
Shelves No.	2 pcs			
Consumption	650W	1000W	1600W	2500W
Power Supply	Standard: 220V±10%,50/60Hz; Optional: 110V,60Hz			
Internal Size(W*D*H) mm	298*290*274	419*332*348	550*348*550	602*498*602
External Size(W*D*H) mm	580*554*455	708*595*532	830*620*735	880*775*785
Package Size(W*D*H) mm	710*660*620	840*690*700	960*720*900	1010*880*940
Gross Weight(kg)	51	66	115	145