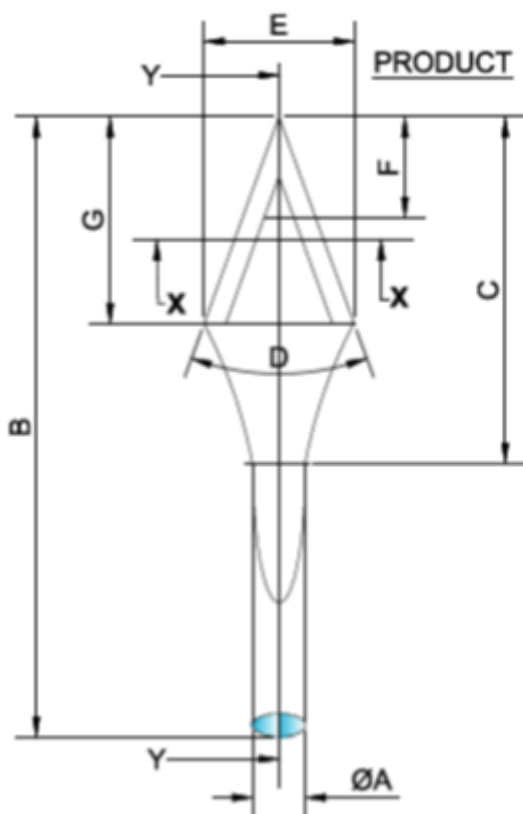
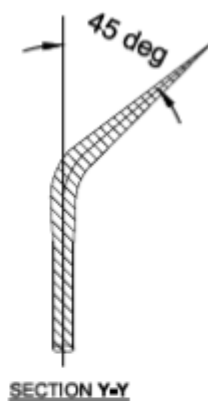

SECTION VIEW X-X DETAILS

P	Q	R
0.15	25.22°	0.30


SECTION VIEW Y-Y DETAILS

BENDING ANGLE
45°

Ref	ØA	B	C	D	E	F	G
62056	0.63	25	7.0	40°	1.4	2	1.82
62057	0.74	25	7.0	40°	1.6	2	2.10
62058	0.74	25	7.0	40°	1.8	2	2.37
62059	0.8	25	7.0	40°	2.0	2	2.75
62016	0.8	25	7.0	40°	2.2	2	2.92
62017	0.838	25	7.0	40°	2.4	2	3.20
62052	0.9	25	7.0	40°	2.6	2	3.47
62018-1	0.9	25	7.0	40°	2.75	2	3.75
62018	0.9	25	7.0	40°	2.8	2	3.75
62019	0.9	25	7.0	40°	3.0	2	4.02
62020	0.99	25	7.0	40°	3.2	2	4.30
Tolerance ±	0.05	1.0	1.0	2°	0.1	0.1	0.1

All dimensions in mm

A: Diameter of the wire

B: Total length of the blade

C: Bend length

D: Profile degree

E: Width of the blade

F: Depth marking

G: Blade length

Note: Tolerance is given only for critical dimensions.