



Poză	Descriere
	<u>Adaptor de foraj cranian</u> <u>Adaptor de moară craniană</u>
	<u>Adaptor de foraj alezor</u> <u>Adaptor de ferăstrău oscilant</u>
	<u>Adaptor de taiere a sternului</u> <u>Adaptor de foraj canulată</u>
	<u>Adaptor de foraj în os</u>

	<u>Baterie (acumulator) 14.4V</u>
	<u>Încărcător</u>
	<u>Inel aseptice de transfer a bateriei</u>
	<u>Cutie de sterilizare multifuncțională</u> Masina electrică chirurgicală de gaurit&ferăstrău poate fi autoclavată la temperatură ridicată până la 135 °C și presiune ridicată de 1.6Mpa. timp de 20 de minute.

Accesorii

	Codul	Lungimea totală	Lungimea (mm)	Lăţimea	Grosimea
	987022080	98	70	22	0.8
	9870220120	98	70	22	1.2
	785013080	78	50	13	0.8
	7850130100	78	50	13	1
	7850130120	78	50	13	1.2
	987024080	98	70	24	0.8
	9870240100	98	70	24	1
	9870240120	98	70	24	1.2
	1189022080	118	90	22	0.8
	11890220100	118	90	22	1
	11890220120	118	90	22	1.2

	11890220127	118	90	22	1.27
	1189024080	118	90	24	0.8
	11890240100	118	90	24	1
	11890240120	118	90	24	1.2
	9870190100	98	70	19	1
	9870250100	98	70	25	1
	11890130100	118	90	13	1
	11890130120	118	90	13	1.2
	11890190100	118	90	19	1
	11890190127	118	90	19	1.27
	11890250100	118	90	25	1
	11890250120	118	90	25	1.2
	68406650	68	40	6.6	0.5
	68408050	68	40	8	0.5
	684010050	68	40	10	0.5
	744610050	74	46	10	0.5
	583010050	58	30	10	0.5
	835515050	83	55	15	0.5
	633515050	63	35	15	0.5
	65378030	65	37	8	0.3
	653712030	65	37	12	0.3

		$\Phi 0.8$	110	30	
		$\Phi 1.0$	110	30	
		$\Phi 1.1$	110	30	
		$\Phi 1.5$	110	30	
		$\Phi 1.8$	110	30	
		$\Phi 2.0$	110	30	
		$\Phi 1.0$	150	50	
		$\Phi 1.2$	150	50	
		$\Phi 1.5$	150	50	
		$\Phi 2.0$	150	50	
		$\Phi 2.5$	150	50	
		$\Phi 2.7$	150	50	
		$\Phi 2.8$	150	50	
		$\Phi 3.0$	150	50	
		$\Phi 3.2$	150	50	
		$\Phi 3.5$	150	50	
		$\Phi 3.8$	150	50	
		$\Phi 4.0$	150	50	
		$\Phi 4.5$	150	50	
	Flexible drill bit	$\Phi 2.5$	195	25	
		$\Phi 3.2$	195	25	
		$\Phi 3.5$	195	25	
		$\Phi 4.0$	195	25	
	AO drill bit	Dia	length	thread length	
	115.13.02.001	$\Phi 1.8$	70	10	
	115.13.02.003	$\Phi 1.9$	80	7	
	115.13.02.004	$\Phi 1.9$	80	18	
	115.13.02.005	$\Phi 1.9$	80	28	
	115.13.01.001	$\Phi 2.0$	100	30	
	115.13.02.002	$\Phi 2.0$	70	10	
	115.13.02.006	$\Phi 2.4$	80	7	
	115.13.02.007	$\Phi 2.4$	80	18	
	115.13.02.008	$\Phi 2.4$	80	28	

	115.13.01.002	Φ2.5	110	30
	115.13.01.015	Φ2.5	110	50
	115.13.01.003	Φ2.7	120	30
	115.13.01.019	Φ2.8	165	35
	115.13.01.004	Φ3.0	115	50
	115.13.01.005	Φ3.2	115	50
	115.13.01.006	Φ3.2	145	40
	115.13.01.007	Φ3.2	180	50
	115.13.01.008	Φ4.0	150	50
	115.13.01.016	Φ4.0	100	14
	115.13.01.017	Φ4.0	100	33
	115.13.01.018	Φ4.1	220	35
	115.13.01.014	Φ4.2	300	60
	115.13.01.009	Φ4.2	230	45
	115.13.01.010	Φ4.5	145	50
	115.13.01.011	Φ4.5	150	50
	115.13.01.012	Φ4.5	180	50
	115.13.01.013	Φ5.0	115	50
	hollow drill bit	Dia	length	thread length
	115.14.01.001	Φ2.0	150	15
	115.14.01.002	Φ2.5	150	20
	115.14.01.003	Φ2.8	150	20
	115.14.01.004	Φ3.0	150	20
	115.14.01.005	Φ3.2	150	25
	115.14.01.006	Φ3.5	150	25
	115.14.01.007	Φ4.0	250	40
	115.14.01.008	Φ4.5	250	40
	115.14.01.009	Φ4.8	250	40
	115.14.01.010	Φ5.0	250	40
	115.14.01.011	Φ5.5	250	40
	115.14.01.012	Φ5.8	250	40
	Cranial drill bit	Dia		
	115.09.01.002	Φ5		
	115.09.01.003	Φ6		
	115.09.01.004	Φ7		
	115.09.01.005	Φ8		

	115.09.01.006	Φ9	
	115.09.01.007	Φ10	
	115.09.01.008	Φ11	
	115.09.01.009	Φ12	
	115.09.01.010	Φ13	
	Chuck		
	Normal Chuck		
	Jacos Chuck		
	single charger	107.01.06.01B	
	double charger	107.01.06.02B	
	Battery		
	14.4V battery	107.01.05.01B	
	7.2V battery	107.01.05.02B	
	Shaft (stryker/ Hudson)	write	length--318mm



Reamer head	Φ36
Reamer head	Φ38
Reamer head	Φ40
Reamer head	Φ42
Reamer head	Φ44
Reamer head	Φ46
Reamer head	Φ48
Reamer head	Φ50
Reamer head	Φ52
Reamer head	Φ54
Reamer head	Φ56
Reamer head	Φ58
Reamer head	Φ60
Reamer head	Φ62
Reamer head	Φ64



	Dia	length(mm)
Flexible reamer	Φ6	450
Flexible reamer	Φ6.5	450
Flexible reamer	Φ7	450
Flexible reamer	Φ7.2	450
Flexible reamer	Φ7.5	450
Flexible reamer	Φ8	450
Flexible reamer	Φ8.5	450
Flexible reamer	Φ9	450
Flexible reamer	Φ9.5	450
Flexible reamer	Φ10	450
Flexible reamer	Φ10.5	450
Flexible reamer	Φ11	450
Flexible reamer	Φ11.5	450
Flexible reamer	Φ12	450
Flexible reamer	Φ12.5	450
Flexible reamer	Φ13	450
Flexible reamer	Φ13.5	450
Flexible reamer	Φ14	450
Flexible reamer	Φ14.5	450
Flexible reamer	Φ15	450



Aluminum box for single hand piece



Aluminum box for multifunction system



Aluminum box for Spine micro drill



White inner box




Tavă de sterilizare



Tavă de sterilizare scule electrice standard



Tavă de sterilizare pentru arbore și cap alezor

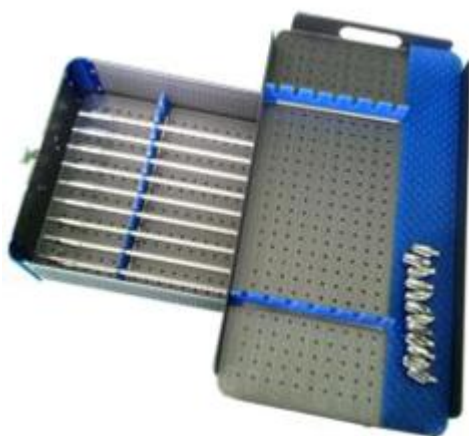

Tavă de sterilizare pentru alezor flexibil