

HI-TORQUE WHISPER™

Specialty Guide Wire

DESIGNED FOR SMOOTH DEVICE DELIVERY IN HIGHLY TORTUOUS ANATOMY

Superb trackability and torqueability

- The HI-TORQUE WHISPER™ family of wires has a hydrophilic-coated polymer cover over a RESPONSEASE transitionless core, which allows it to track easily around the tightest bends and access lesions in the most tortuous anatomy
- Its DURASTEEL core-to-tip, high-tensile strength, stainless steel material gives precise steering, outstanding durability and excellent tactile feedback

Smooth device delivery

- The HI-TORQUE WHISPER™ ES Guide Wire is the latest addition to the HI-TORQUE WHISPER™ range of polymer Guide Wires. It offers a higher level of support, which makes device delivery easier

Excellent steering

- Through angulated anatomy


Durable wires

- With different support level options

Excellent support

- For crossing and device delivery



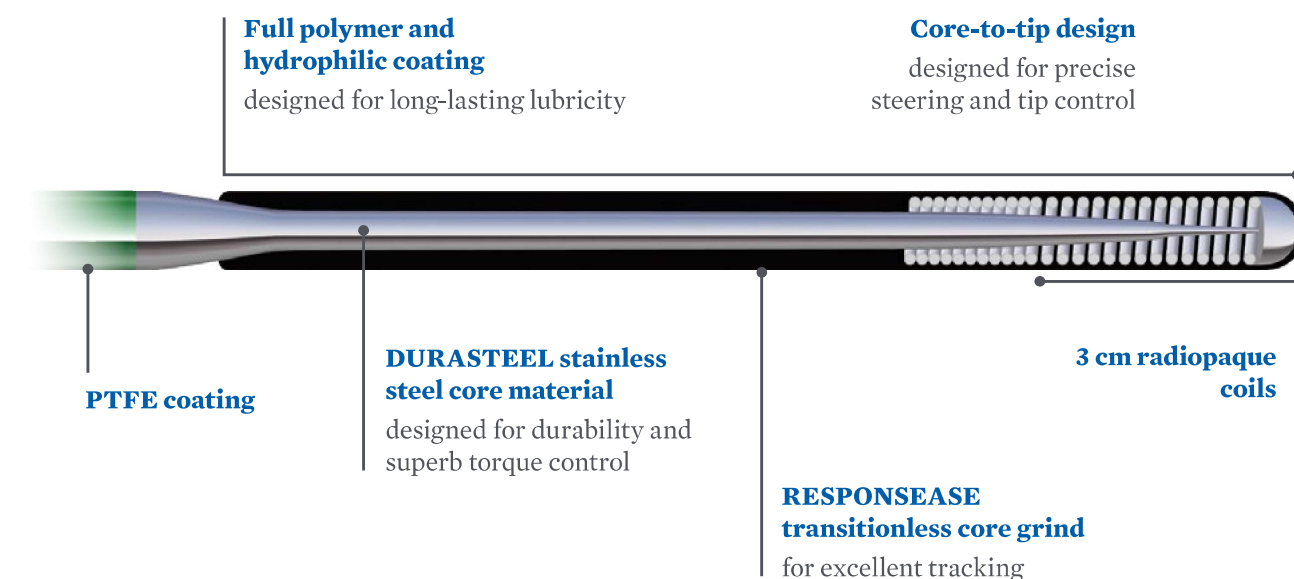

ORDERING INFORMATION

HI-TORQUE WHISPER™ EXTRA SUPPORT (ES)		COVER	TIP LOAD	COATING	CORE	STRUCTURE
		FULL POLYMER	1.2g	HYDROPHILIC	DURASTEEL STAINLESS STEEL	CORE-TO-TIP
PRODUCT DESCRIPTION	PART NUMBER	TIP DIAMETER (IN)	WIRE LENGTH (CM)	TIP SHAPE	RADIOPAQUE TIP LENGTH (CM)	
HI-TORQUE WHISPER™ ES	1011834H	0.014	190	Straight	3	
HI-TORQUE WHISPER™ ES	1011834HJ	0.014	190	J	3	
HI-TORQUE WHISPER™ ES	1011835H	0.014	300	Straight	3	
HI-TORQUE WHISPER™ ES	1011835HJ	0.014	300	J	3	

HI-TORQUE WHISPER™ MODERATE SUPPORT (MS)		COVER	TIP LOAD	COATING	CORE	STRUCTURE
		FULL POLYMER	1.0g	HYDROPHILIC	DURASTEEL STAINLESS STEEL	CORE-TO-TIP
PRODUCT DESCRIPTION	PART NUMBER	TIP DIAMETER (IN)	WIRE LENGTH (CM)	TIP SHAPE	RADIOPAQUE TIP LENGTH (CM)	
HI-TORQUE WHISPER™ MS	1005357H	0.014	190	Straight	3	
HI-TORQUE WHISPER™ MS	1005357HJ	0.014	190	J	3	
HI-TORQUE WHISPER™ MS	1005359H	0.014	300	Straight	3	
HI-TORQUE WHISPER™ MS	1005359HJ	0.014	300	J	3	

HI-TORQUE WHISPER™ LIGHT SUPPORT (LS)		COVER	TIP LOAD	COATING	CORE	STRUCTURE
		FULL POLYMER	0.8g	HYDROPHILIC	DURASTEEL STAINLESS STEEL	CORE-TO-TIP
PRODUCT DESCRIPTION	PART NUMBER	TIP DIAMETER (IN)	WIRE LENGTH (CM)	TIP SHAPE	RADIOPAQUE TIP LENGTH (CM)	
HI-TORQUE WHISPER™ LS	1005351H	0.014	190	Straight	3	
HI-TORQUE WHISPER™ LS	1005351HJ	0.014	190	J	3	
HI-TORQUE WHISPER™ LS	1005353H	0.014	300	Straight	3	
HI-TORQUE WHISPER™ LS	1005353HJ	0.014	300	J	3	

Caution: This product is intended for use by or under the direction of a physician. Prior to use, reference the Instructions for Use provided inside the product carton (when available), at eifu.abbottvascular.com or at medical.abbott/manuals for more detailed information on Indications, Contraindications, Warnings, Precautions and Adverse Events. **Information contained herein for DISTRIBUTION in Europe, Middle East and Africa ONLY.** Check the regulatory status of the device in areas where CE marking is not the regulation in force.

Tests performed by and data on file at Abbott. Illustrations are artist's representations only and should not be considered as engineering drawings or photographs. Photos on file at Abbott.

Abbott Vascular International BVBA

Park Lane, Culliganlaan 2B, 1831 Diegem, Belgium, Tel: 32.2.714.14.11

™ Indicates a trademark of the Abbott Group of Companies.

www.cardiovascular.abbott

©2019 Abbott. All rights reserved. 1-EH-1-9219-01 03-2019