



Model: GS105

# 5-Port Gigabit Unmanaged Switch




Power Saving



140m Distance



Metal Casing

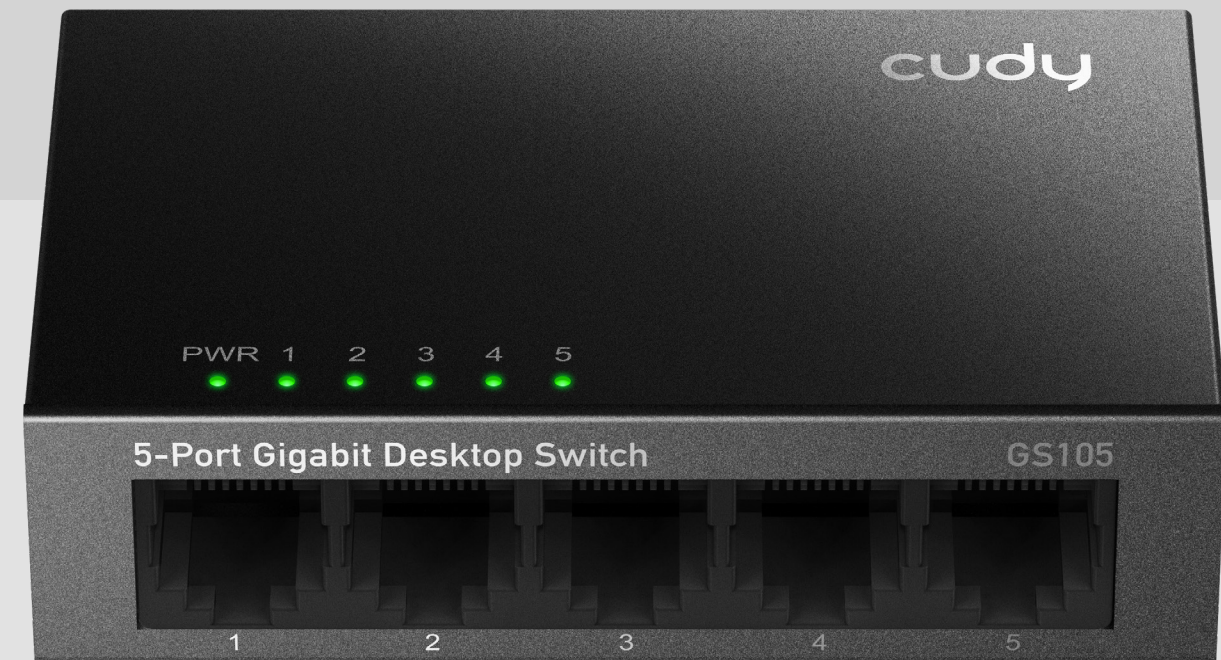

# Highlights

A 5-GbE switch with metal casing, supporting full Gigabit speeds on all five ports over distances up to 140 m, and featuring a super-efficient chipset with idle power consumption of just 0.2W.

- 5x Gigabit Ethernet Ports
- Max 140m Gigabit Transmission
- 86.5x53x23 mm (3.41x2.09x0.91")
- Metal Casing
- Max 1.2W, Idle 0.2W
- IGMP Snooping
- Desktop, Wall-Mount

# Package Content

- GS105
- Power Adapter
- Installation Guide



## Longer Gigabit Reach, Lower Power Consumption

— 10/100/1000 Mbps Ethernet



Prolonged Transmission Distance



Wall Mounting



Connect Office Computers to Wired Network



Boost Home Devices with Stable Ethernet



# Specifications

Interfaces	Gigabit RJ45 Ports	5
	LED	Power
		Speed/Link/ACT of Each Ethernet Port
	Power Input	DC Port
Performance	Copper Speed and Distance	Cat. 3 or higher cable: 100 meters at 10 Mbps Cat. 5 or higher cable: 100 meters at 100 Mbps Cat. 5e or higher cable: 140 meters at Gigabit
	MAC Address Table	2048
	Max Switching Capacity	10 Gbps
	Max Forwarding Rate	7.44 Mpps
	Jumbo Frame	9 KB
	Packet Buffer	1 Mbit
	Power	Power Saving
Power Methods		DC
DC		5V 0.55A
Max Power Consumption		1.2W
Idle Power Consumption		0.2W
Switching	802.3 Protocols	802.3x Flow Control 802.3i 10BASE-T 802.3u 100BASE-TX 802.3ab 1000BASE-T
	L2 Features	IGMP Snooping

# Specifications

Reliability	Lightning/Surge Protection	2kV
	ESD Contact Protection	4kV
	ESD Air Protection	8kV
	Environment	Operating Temperature: 0 °C ~ 40 °C (32 °F ~104 °F) Storage Temperature: -40 °C ~ 70 °C (-40 °F ~ 158 °F) Operating Humidity: 10% ~ 90% non-condensing Storage Humidity: 5% ~ 90% non-condensing
Mechanical	Dimension	86.5×53×23 mm 3.41×2.09×0.91 inches
	Product Weight	115.1 g (4.06 oz.)
	Casing Material	Metal
	Installation	Desktop Wall-mount