

Regulation Class	Document Class	 
Procedure	Template	

DECLARATION of CONFORMITY No. 1 on 10.09.2022

We, OMV Petrom SA with its headquarters located in 22, Coralilor Street, District 1, zip code 013329, Bucharest ("Petrom City"), registered with the Trade Registry under no. J40/8302/1997, Registration code 1590082, subscribed share Capital of RON 5664410833.50, ensure, guarantee and declare, undertaking all liability, that the product:

GASOLINE Standard 95 / EN 228-10 ppm

the lot : 7016;4037;1350;2309;3083;3992;7454;6438;6725;1279;4398;2298;2330;3510;4154;1272;
2684;1664;2273;2299;1339;

loaded from tank : 109

in quantity of = 1042.9 to

product quality is according to the Delivery Specification R 11 version 4 date JULY 2015
and the Safety Data Sheet of the product, version REVIZION 3.0 date 27 APRIL 2018.

The product is certified by the Romanian Automotive Register according to the Certificate of Conformity no. date **Not Applicable**.


The product is guarantee 6 month if storage and handling requirements are observed – provided in the Safety Data Sheet of the product.

PETROBRAZI Refinery
(working point issuer)



Appointed person,

(Name and surname)
Adriana MARINICA
(Signature and stamp)
AM. Nr. 3

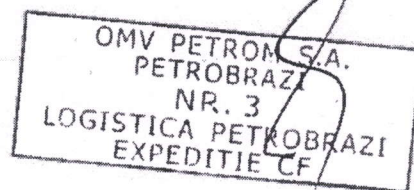

MR-PC15.01-5222EN F6
Edition: 5



Editor: Mihailescu Florenta
Date: 02.03.2016


*Declar pe propria
răspundere că fotocopia
este identică cu originalul.*

[Signature]

Inspection Report No.:
PBZ-0069353EN from: 08-SEP-2022
hour: 19:04

Product: Gasoline Standard 95 / EN 228-10 ppm
 Produced by OMV Petrom S.A. - member of OMV Group in Petrobrazi refinery
Lot: 2602PE0121220907 Rez 109
Order: 12704 from: 07.09.2022
Sample from: 07.09.2022 20:00 sampled according to: EN ISO 3170
Complies with: R11 Ed. 4 / Jul. 2015

Parameter	Unit	Limit	Result	Method
Density at 15 °C	Kg/m3	720.00 - 775.00	758.70	SR EN ISO 12185
Research Octane number, RON		≥95	96.1	SR EN ISO 5164
Motor Octane number, MON		≥85	85.9	SR EN ISO 5163
Lead content	mg/l	≤5	<2.5	SR EN 237
Benzene content	% V/V	≤1	0.61	SR EN ISO 22854
Sulphur content	mg/kg	≤10	9.8	SR EN ISO 20846
Manganese content	mg/l	≤2	<2.0	EN 16135
Existent gum content(solvent washed)	mg/100ml	≤5	2	SR EN ISO 6246
Appearance		clear and bright	Clear and bright	INSPECTIE VIZUAL
Cooper strip corrosion (3 h at 50°C)		class 1	1b	SR EN ISO 2160
Oxidation stability	min	≥360	>360	SR EN ISO 7536
Distillation				SR EN ISO 3405
Evaporated at 70°C-SUMMER	%V/V	20 - 48	24.1	SR EN ISO 3405
Evaporated at 100°C	%V/V	46 - 71	52.4	SR EN ISO 3405
Evaporated at 150°C	%V/V	≥75	85.7	SR EN ISO 3405
Final boiling point	°C	≤210	200.1	SR EN ISO 3405
Distillation residue	%V/V	≤2	1.0	SR EN ISO 3405
Vapour pressure, VP-SUMMER	kPa	45 - 60	52.7	SR EN 13016
VLI summer =(10*VP+7*E70)			695.70	CALCULAT
Olefins	% V/V	≤18	14.3	SR EN ISO 22854
Aromatics	% V/V	≤35	32.0	SR EN ISO 22854
Oxygen content	%m/m	≤2.7	2.32	SR EN ISO 22854
Methanol	%V/V	≤1	0.60	SR EN ISO 22854
Ethanol	%V/V	≤5	0.15	SR EN ISO 22854
Iso-propyl alcohol	%V/V		0.10	SR EN ISO 22854
Iso-butyl alcohol	%V/V		<0.1	SR EN ISO 22854
Tert-butyl alcohol	%V/V		<0.1	SR EN ISO 22854
Ethers(5 or more C atoms)	%V/V		11.80	SR EN ISO 22854
Other oxygenates	%V/V		<0.1	SR EN ISO 22854



Tests performed by Bureau Veritas SRL, Laborator incercari fizico-chimice Petrobrazi, accredited according to SR EN ISO/IEC 17025:2018 with certificate no. LI 1218 updated on 24.09.2021.

