


KERN PFB 600-2

KERN

Quick-display precision balance with user-friendly concept of operation mode - now also with checkweighing function

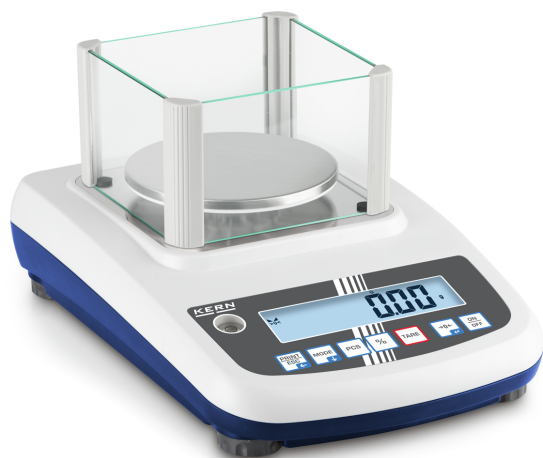

Possible calibration points	200 g; 400 g; 600 g
Stabilization time	2 s
Warm-up time	120 min
Eccentric loading at 1/3 [Max]	0,02 g
Maximum creep (15 minutes)	100 mg
Maximum creep (30 minutes)	200 mg

Approval

CE mark	✓
---------	---

Display

Display type	LCD
Display screen size	129 x 27
Display backlight	✓
Display digit height	21 mm
Languages of the user interface	Symbol language

Construction

Dimension housing (W×D×H)	210×315×90 mm
Dimensions rectangular draught shield - inner (W×D×H)	140×150×65 mm
Dimensions rectangular draught shield - outer (W×D×H)	147×163×80 mm
Dimensions completely mounted (W×D×H)	210×315×160 mm
Material housing	plastic
Material weighing plate	stainless steel
Material platform	Stainless steel
Material draught shield	glass
Dimensions weighing surface (Ø)	120 mm
Transport safety lock - bolt torque	0,1 Nm
Material load cell(s)	aluminium
Levelling feet adjustable	✓
Level indicator	✓

Functions

Number of keys for operation	7
	5 min
	2 min
Auto-off interval(s) in battery mode/rechargeable battery mode	1 min
	30 min
	60 min
	30 sec

Capacity - Display	✓
PreTare function	✓
Tare function	manual (multi)
Hold function	✓
Percentage determination	✓

Category

Brand	KERN
Product category	Laboratory balance
Product group	Precision balance
Product family	PFB

Measuring System

Construction type of the scale	Single-range balance
Weighing system	Strain gauge
Weighing capacity [Max]	600 g
Readability [d]	0,01 g
Resolution	60.000
Linearity	± 0,02 g
Reproducibility	0,01 g
Default unit	g

Units	g
	gn
	dwt
	tl (Tw)
	tl (HK)
	ozt
	tl (Singap, Malays)
	ct
	mo
	lb
	oz
	ffa
	tol
	m

USP Minimum weight of sample (k = 2, U = 0.1%)	20 g
--	------

Adjustment options	Adjusting with external weight
Recommended adjusting weight	600 g (F1)

KERN PFB 600-2



Quick-display precision balance with user-friendly concept of operation mode - now also with checkweighing function

Counting function	✓
Tolerance weighing	✓
Tolerance weighing - type of signal	acoustically visual
Function for averaging under unstable weighing conditions	✓
Recipe/summing level	Rez A (Net total)
Sum memory function	✓
Interfaces	RS-232 standard Bluetooth BTC (v2.0) (optional, factory) Bluetooth BLE (v4.0) (optional, factory)
IP protection - display	no IP protection
IP protection - load cell	IP65

Counting

Smallest piece weight when piece counting - laboratory conditions	20 mg
Smallest piece weight when piece counting - normal conditions	200 mg
Counting reference weight can be entered	✓
Reference quantity	5, 10, 20, 50, free, Input
Counting resolution (laboratory conditions)	30.000

Power Supply

Input voltage power supply / power [Max]	100 V - 240 V, 50 / 60 Hz
Input voltage device / power [Max]	12 V, 500 mA
Plug-in power supply type	Power adapter
Supplied power supply	Power supply unit
Plug-in power supply / adapter for countries - included with the delivery	EURO UK US CH
Plug-in power supply / adapter for countries - optional	EURO AUS UK US CH
Rechargeable battery optional	Rchrg. battery optional (factory)
Rechargeable battery charging time	6,5 h
Rechargeable battery operating time - backlight on	36 h
Rechargeable battery operating time - backlight off	72 h

Battery / accumulator type	Li-Ion
Battery connection	proprietary plug

Environmental conditions

Humidity of environment [Min]	0 %
Humidity of environment [Max]	80 %
Ambient temperature [Min]	15 °C
Ambient temperature [Max]	30 °C
Storage temperature [Min]	-20 °C
Storage temperature [Max]	60 °C

Packing & Shipping

Readability force [d] (N)	1 d
Dimensions packaging (W×D×H)	385×280×280 mm
Net weight	1,252 kg
Shipping method	Parcel service
Net weight approx.	1,4 kg
Gross weight approx.	2,6 kg
Shipping weight	6 kg

Services (optional)

Article number for DAkkS calibration	963-127
Article number for certificate of conformity (verification)	969-517

Pictograms

STANDARD



OPTION



FACTORY

