


MICRO MARTIN Smooth Tool-less Eco
MRUSTE 020 740 BC5 BT008 CSN NH1

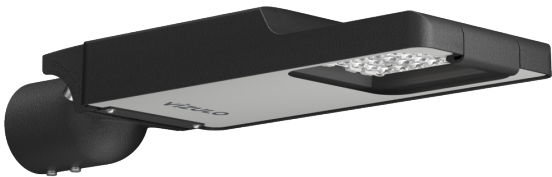

CE   RoHS

Color

RAL 9006

Electrical

Input power	20 W
Input voltage	220 - 240 V
Frequency	50 - 60 Hz
Power factor	0.95
Inrush current	19 A / 195 µs



Optical

Optic name	BC5
Luminous flux	2783 lm ±10%
Luminous efficacy	139 lm/W
Performance temperature Tq	+25 °C
Constant light output	No
Color rendering index	>70
Color temperature	4000 K
Color tolerance	5 SDCM
ULOR	0
LED quantify	8

Lifetime

Lumen depreciation	L90 after 100 000 h
Warranty	5 years
Ambient temperature range	-40 ... +50 °C

Protection	Protection class	Class I
	Surge protection L-N	12 kV
	Surge protection L/N-PE	12 kV
	LED module thermal protection w/ NTC	No
	Max products per MCB B16	32
	Ingress protection	IP66
	Impact resistance	IK08
Housing	Body material	Die-cast aluminium
	Cover material	Flat tempered glass
	Optic material	PMMA
	Color	RAL 9006 (white aluminium)
	Dimensions	517 x 170 x 96 mm
	Max wind load area SCd	0.04 m ²
	Mounting	Post top / side-entry, 60 mm
	LED module replaceability	Replaceable by a professional
	Driver replaceability	Replaceable by a professional
Controls	Accessibility of electronic components	Tool-less
	Dimming	No dimming
Approvals	CE	Yes
	ENEC	Yes
	ENEC+	Yes
	RoHS	Yes

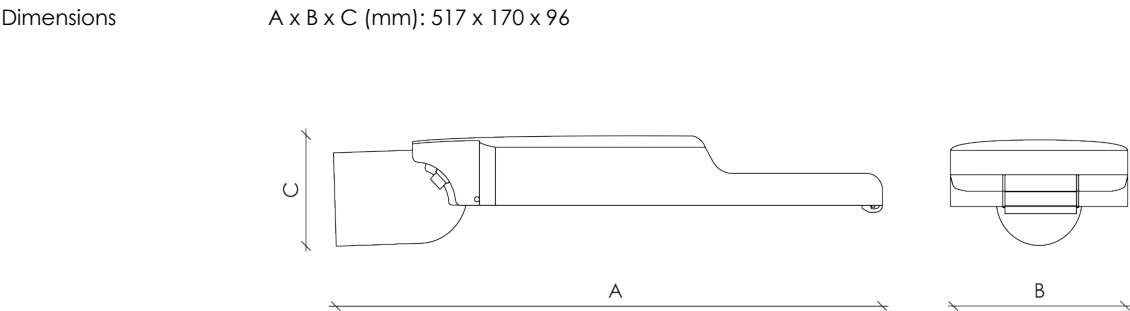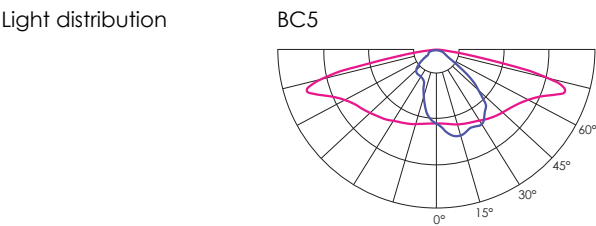

Product images

