


DN	L	H	W	A	B	C	T	N-φ
15	130	161	100	95	65	45	16	4-14
20	150	164	100	105	75	55	16	4-14
25	160	196	125	115	85	65	16	4-14
40	200	246	160	145	110	85	18	4-18
50	250	271	180	160	125	100	20	4-18

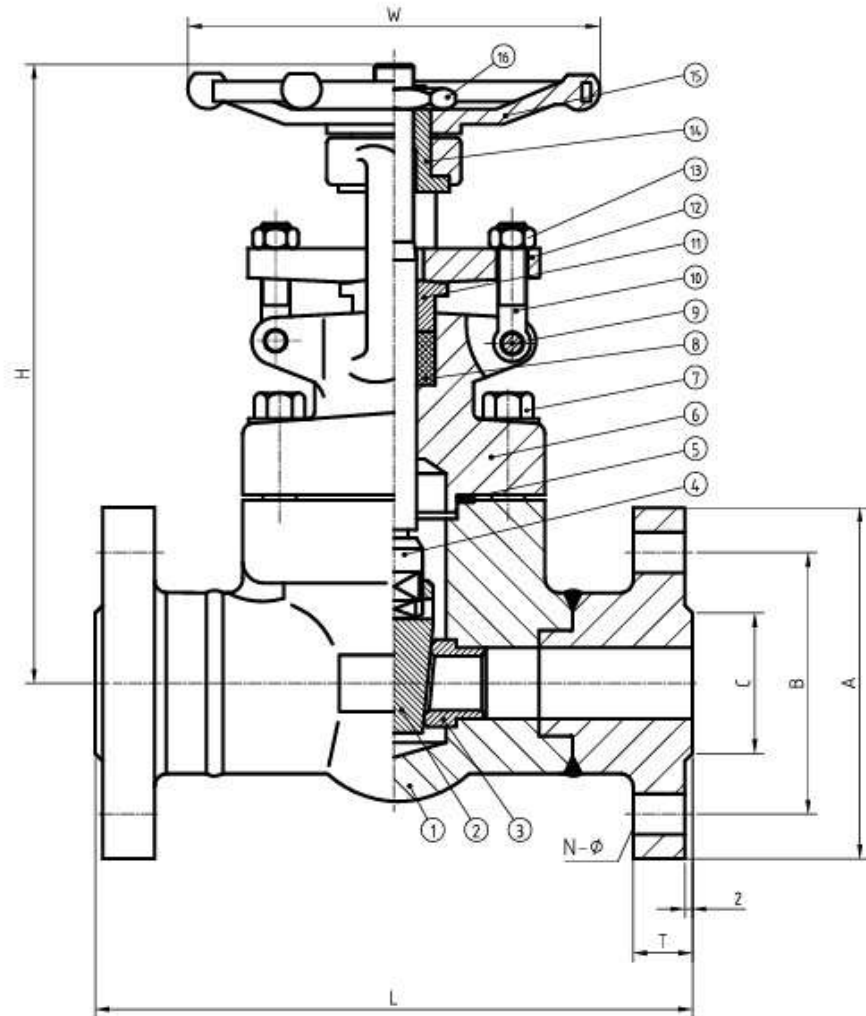

Specification			
PN		16	
test pressure	strength test	2.4	MPa
	back seat test	1.76	
	sealing test	1.76	
	air sealing test	0.6	
max. working temp.		≤425°C	
suitable media: water, steam, oil, gas			
Technical Requirement			
Construction design conforms		GB/T12234	
Flanged ends conform		JB/T79	
Face to face conform		GB/T12221	
Inspecting & testing accord		GB/T13927	

16	Locking Nut	1	35#
15	Hand Wheel	1	A197
14	Stem Nut	1	35#
13	Hex Nut	2	2H
12	Gland Flange	1	A105
11	Gland	1	4.10
10	Gland Eyebolt	2	B7
9	Pin	2	35#
8	Packing	1	Graphite
7	Bolt	4	B7
6	Bonnet	1	A105
5	Gasket	1	304+Graphite
4	Stem	1	13Cr
3	Seat	2	13Cr
2	Wedge	1	13Cr
1	Body	1	A105
NO.	Name	Qty	Material

Gate Valve

Fig No

Design		Z41H-16C	
Checked			
Standard		Drawing No	REV
Approved			