


VEGA SUCTION UNITS, HIGH VACUUM, LOW AND HIGH FLOW



**HIGH VACUUM
HIGH FLOW**

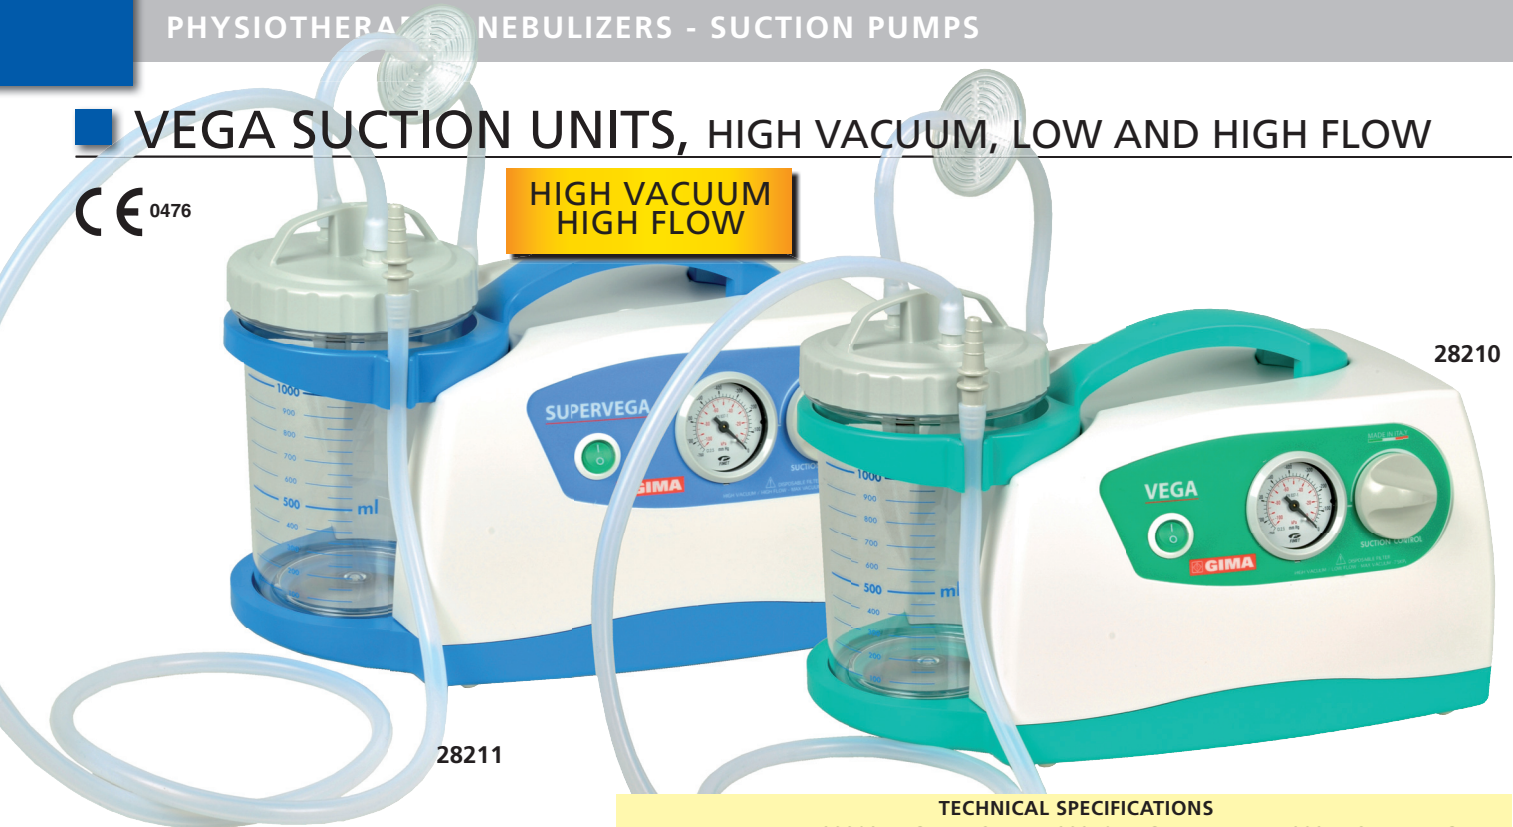

28211

28210

VEGA SUCTION UNITS


A line of stylish, compact and reliable aspirators for small surgery. Silent, high flow and maintenance - free pumps allow long product life and durability. Recommended for nasal aspiration, oral aspiration, tracheal aspiration of body liquids (mucus, catarrh or blood) in adults or children. Equipped with vacuum regulator continuously adjustable, vacuum indicator, unbreakable 1,000 ml or 2,000 ml bottle, autoclavable at 121°C, with safety float control valve to prevent overflow. Optional bottle autoclavable at 134°C. Manufactured in electric and thermal insulated plastic body.

Autoclavable and disposable collection system: In addition to standard autoclavable jar is available a disposable collection system composed by a rigid reusable container and a polyethylene disposable liner with cover, hermetically sealed, and hydrophobic, antireflux, bacterial filter operating as an overflow valve. Made in Italy.



28211
+
28213

1 l polycarbonate autoclavable jar with overflow safety valve

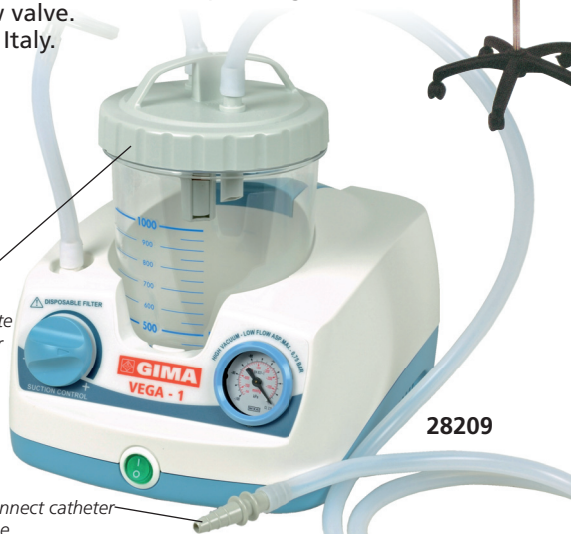

28209

28252
Adaptor to connect catheter to silicone tube

STANDARD ACCESSORIES

- Autoclavable jar (1 or 2 l) with overflow valve system
- Antibacterial and hydrophobic filter
- Set of silicone tubes 6x10 mm
- Conical connector for probes
- 6 languages user manual (GB, FR, IT, DE, ES, PT) **28229**



TECHNICAL SPECIFICATIONS

	28209 VEGA UNO	28210 VEGA	28211 SUPERVEGA
Operating Voltage:	220-230 V - 50/60 Hz 110 V - 60 Hz (on request)	220-230 V - 50/60 Hz 110 V - 60 Hz (on request)	220-230 V - 50/60 Hz or 110 V - 60 Hz
Power consumption:	184 W	184 W	106 W
Bottle capacity:	1,000 ml	1,000 ml	1,000 ml or 2,000 ml
Flow (air litres/min):	15 l/min	16 l/min	40 l/min
Max suction:	-0.75 bar (563 mm/Hg)	-0.75 bar (563mm/Hg)	-0.80 bar (600mm/Hg)
Operating cycle:	continuous	continuous	continuous
Size:	25x19x16.5 cm	35x21x18 cm	35x21x18 cm
Weight:	2.2 kg	2.5 kg	3.6 kg
Norms:	93/42/ECC	93/42/ECC	93/42/ECC

GIMA code	VEGA SUCTION ASPIRATOR	Operating power	Flow
28209	Vega Uno	220-230 V - 50/60 Hz	15 l/m
28210	Vega	220-230 V - 50/60 Hz	16 l/m
28211	Super Vega 1l	220-230 V - 50/60 Hz	40 l/m
28212	Super Vega 2l	220-230 V - 50/60 Hz	40 l/m
28189	Super Vega 1l	110 V - 60 Hz	40 l/m



GIMA code	SPARE ACCESSORIES FOR VEGA AND TOBI LINE
28229	Hydrophobic, 99% antibacterial filter
28226	121°C autoclavable jar 1 l with cover and overflow system
28236	121°C autoclavable jar 2 l with cover and overflow system
28227	Cover and overflow valve system for 28226 and 28236
28185	134°C autoclavable jar 1 l with cover and overflow system
28186	134°C autoclavable jar 2 l with cover and overflow system
28184	Cover and overflow valve system for 28185 and 28186
28271	Disposable liner 1 l (cover + bag)
28270	Container for disposable liner 1 l
28268	Disposable liner 1 l (cover + bag) - box of 50
28273	Disposable liner 2 l (cover + bag)
28269	Disposable liner 2 l (cover + bag) - box of 50
28272	Container for disposable liner 2 l Ø 13 cm top, 9.5 cm bottom
25468	Silicone tube 6x10 mm - roll of 30 m
28252	Adaptor to connect catheter to silicone tube
	Suction catheter - see at page 43
28213	Trolley for Vega and Super Vega (not for Vega Uno)
28276	Vacuum indicator for Vega and Super Vega (not for Vega Uno)