



CONSTRUCTION PRODUCTS REGULATION
DECLARATION OF PERFORMANCE (Reg. No:305/2011/EU)
Issue Date: 01.08.2013 Document No: F-KGSF-029 Rev. No: 01 Rev Date:05.12.2013

Description:	Panel Radiators
Model:	Type 10 (P) - Hygienic radiators
Intended Use:	Radiators for use in heating systems in buildings
Manufacturer:	ELBA Basınçlı Döküm AŞ. Manisa Organize Sanayi Bölgesi 50.Yıl Caddesi No:14 Manisa
Trade Mark	ECCORAD - PREMIUM
System of Assessment & Verification of Constancy of Performance:	System 3: All products in different ELBA production site, produced according to the same technical specifications use the same production methods and materials, fulfil the same requirement of quality
Notified Bodies:	DIN CERTCO Gesellschaft für Konformitätsbewertung mbH Alboinstr. 56 D-12103 Berlin Notified Body : NB 0196 , Report no : B04 101.1716K Turkish Standards Institution (TSE) Notified Body 1783

Essential Characteristics	Performance	Harmonized technical specification																																																																			
Reaction to Fire	Class A1	EN 442-1 : 2014																																																																			
Release of dangerous substances	None																																																																				
Surface temperature	Maximum 120 °C																																																																				
Resistance to pressure	Leak Test : 1300 kPa Strength Pressure Test: 1690 kPa Declared Max. Working Pressure: 1000 kPa																																																																				
Resistance against corrosion:	No corrosion after 100 h humidity																																																																				
Resistance against minor impact:	Class 0																																																																				
Thermal Output Test	Thermal Output Characteristic Equations (L = length in metres)																																																																				
Heights	<table border="1"><thead><tr><th colspan="2">ΔT 50° C</th><th colspan="2">ΔT 60° C</th><th rowspan="2">n</th><th rowspan="2">K_M</th><th rowspan="2">Φ</th></tr><tr><th>Watt/m</th><th>Kcal/hm</th><th>Watt/m</th><th>Kcal/hm</th></tr></thead><tbody><tr><td>300</td><td>332</td><td>286</td><td>423</td><td>364</td><td>1,3255</td><td>1,8585</td></tr><tr><td>400</td><td>436</td><td>375</td><td>554</td><td>476</td><td>1,3121</td><td>2,572</td></tr><tr><td>500</td><td>537</td><td>462</td><td>680</td><td>585</td><td>1,2987</td><td>3,3383</td></tr><tr><td>550</td><td>586</td><td>504</td><td>742</td><td>638</td><td>1,2920</td><td>3,7426</td></tr><tr><td>600</td><td>633</td><td>544</td><td>800</td><td>688</td><td>1,2853</td><td>4,1468</td></tr><tr><td>700</td><td>725</td><td>624</td><td>917</td><td>789</td><td>1,2907</td><td>4,6503</td></tr><tr><td>800</td><td>813</td><td>699</td><td>1030</td><td>886</td><td>1,2961</td><td>5,1057</td></tr><tr><td>900</td><td>896</td><td>771</td><td>1136</td><td>977</td><td>1,3015</td><td>5,5093</td></tr></tbody></table>	ΔT 50° C		ΔT 60° C		n	K _M	Φ	Watt/m	Kcal/hm	Watt/m	Kcal/hm	300	332	286	423	364	1,3255	1,8585	400	436	375	554	476	1,3121	2,572	500	537	462	680	585	1,2987	3,3383	550	586	504	742	638	1,2920	3,7426	600	633	544	800	688	1,2853	4,1468	700	725	624	917	789	1,2907	4,6503	800	813	699	1030	886	1,2961	5,1057	900	896	771	1136	977	1,3015	5,5093	Φ = K _m · ΔT ⁿ
ΔT 50° C		ΔT 60° C		n	K _M				Φ																																																												
Watt/m	Kcal/hm	Watt/m	Kcal/hm																																																																		
300	332	286	423	364	1,3255	1,8585																																																															
400	436	375	554	476	1,3121	2,572																																																															
500	537	462	680	585	1,2987	3,3383																																																															
550	586	504	742	638	1,2920	3,7426																																																															
600	633	544	800	688	1,2853	4,1468																																																															
700	725	624	917	789	1,2907	4,6503																																																															
800	813	699	1030	886	1,2961	5,1057																																																															
900	896	771	1136	977	1,3015	5,5093																																																															

Date: 4.6.2020

Signed for and on behalf of the manufacturer by;

ELBA BASINÇLI DÖKÜM SANAYİ AŞ.



CONSTRUCTION PRODUCTS REGULATION
DECLARATION OF PERFORMANCE (Reg. No:305/2011/EU)

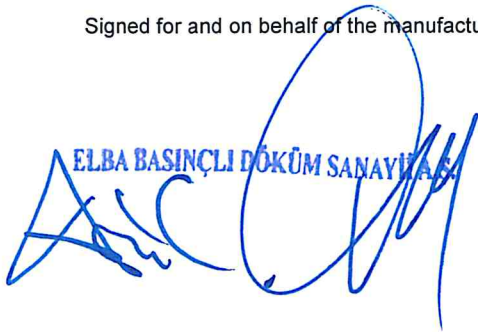
Issue Date: 01.08.2013 Document No: F-KGSF-029 Rev. No: 01 Rev Date:05.12.2013

Description:	Panel Radiators
Model:	Type 20 (PP) - Hygienic radiators
Intended Use:	Radiators for use in heating systems in buildings
Manufacturer:	ELBA Basınçlı Döküm AŞ. Manisa Organize Sanayi Bölgesi 50.Yıl Caddesi No:14 Manisa
Trade Mark	ECCORAD - PREMIUM
System of Assessment & Verification of Constancy of Performance:	System 3: All products in different ELBA production site, produced according to the same technical specifications use the same production methods and materials, fulfil the same requirement of quality
Notified Bodies:	POLITECNICO DI MILANO - DIPARTIMENTO DI ENERGIA Laboratorio Misure Ricerche Termotecniche M.R.T. - Notified body number: 1695 (report no : ENE/MRT.RES. 11009) Turkish Standards Institution (TSE) Notified Body 1783

Essential Characteristics	Performance	Harmonized technical specification																																																																			
Reaction to Fire	Class A1	EN 442-1 : 2014																																																																			
Release of dangerous substances	None																																																																				
Surface temperature	Maximum 120 °C																																																																				
Resistance to pressure	Leak Test : 1300 kPa Strength Pressure Test: 1690 kPa Declared Max. Working Pressure: 1000 kPa																																																																				
Resistance against corrosion:	No corrosion after 100 h humidity																																																																				
Resistance against minor impact:	Class 0																																																																				
Thermal Output Test	Thermal Output Characteristic Equations (L = length in metres)																																																																				
Heights	<table border="1"><thead><tr><th colspan="2">ΔT 50° C</th><th colspan="2">ΔT 60° C</th><th rowspan="2">n</th><th rowspan="2">K_M</th><th rowspan="2">Φ</th></tr><tr><th>Watt/m</th><th>Kcal/hm</th><th>Watt/m</th><th>Kcal/hm</th></tr></thead><tbody><tr><td>300</td><td>619</td><td>532</td><td>783</td><td>674</td><td>1,2913</td><td>3,9611</td></tr><tr><td>400</td><td>780</td><td>671</td><td>987</td><td>849</td><td>1,2904</td><td>5,009</td></tr><tr><td>500</td><td>932</td><td>802</td><td>1179</td><td>1014</td><td>1,2895</td><td>6,0061</td></tr><tr><td>550</td><td>1004</td><td>863</td><td>1270</td><td>1092</td><td>1,2891</td><td>6,4791</td></tr><tr><td>600</td><td>1075</td><td>925</td><td>1360</td><td>1169</td><td>1,2886</td><td>6,9521</td></tr><tr><td>700</td><td>1212</td><td>1042</td><td>1535</td><td>1320</td><td>1,2946</td><td>7,6562</td></tr><tr><td>800</td><td>1344</td><td>1156</td><td>1704</td><td>1465</td><td>1,3006</td><td>8,2931</td></tr><tr><td>900</td><td>1470</td><td>1264</td><td>1865</td><td>1604</td><td>1,3066</td><td>8,8602</td></tr></tbody></table>	ΔT 50° C		ΔT 60° C		n	K _M	Φ	Watt/m	Kcal/hm	Watt/m	Kcal/hm	300	619	532	783	674	1,2913	3,9611	400	780	671	987	849	1,2904	5,009	500	932	802	1179	1014	1,2895	6,0061	550	1004	863	1270	1092	1,2891	6,4791	600	1075	925	1360	1169	1,2886	6,9521	700	1212	1042	1535	1320	1,2946	7,6562	800	1344	1156	1704	1465	1,3006	8,2931	900	1470	1264	1865	1604	1,3066	8,8602	Φ
ΔT 50° C		ΔT 60° C		n	K _M				Φ																																																												
Watt/m	Kcal/hm	Watt/m	Kcal/hm																																																																		
300	619	532	783	674	1,2913	3,9611																																																															
400	780	671	987	849	1,2904	5,009																																																															
500	932	802	1179	1014	1,2895	6,0061																																																															
550	1004	863	1270	1092	1,2891	6,4791																																																															
600	1075	925	1360	1169	1,2886	6,9521																																																															
700	1212	1042	1535	1320	1,2946	7,6562																																																															
800	1344	1156	1704	1465	1,3006	8,2931																																																															
900	1470	1264	1865	1604	1,3066	8,8602																																																															

Date: 4.6.2020

Signed for and on behalf of the manufacturer by;


ELBA BASINÇLI DÖKÜM SANAYİ A.Ş.



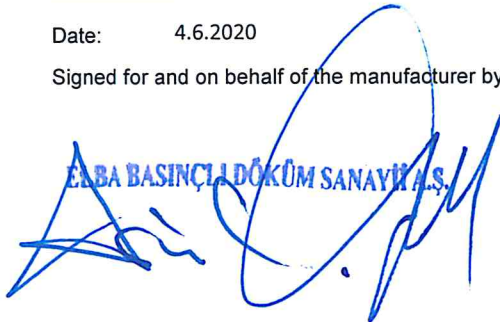
CONSTRUCTION PRODUCTS REGULATION
DECLARATION OF PERFORMANCE (Reg. No:305/2011/EU)
Issue Date: 01.08.2013 Document No: F-KGSF-029 Rev. No: 01 Rev Date:05.12.2013

Description:	Panel Radiators
Model:	Type 30 (PPP) - Hygienic radiators
Intended Use:	Radiators for use in heating systems in buildings
Manufacturer:	ELBA Basınçlı Döküm AŞ. Manisa Organize Sanayi Bölgesi 50.Yıl Caddesi No:14 Manisa
Trade Mark	ECCORAD - PREMIUM
System of Assessment & Verification of Constancy of Performance:	System 3: All products in different ELBA production site, produced according to the same technical specifications use the same production methods and materials, fulfil the same requirement of quality
Notified Bodies:	Centre Technique des Industries Aérouliques et Thermiques (CETIAT) - France Notified body number: 1623 (report no : 2007-165) Turkish Standards Institution (TSE) Notified Body 1783

Essential Characteristics	Performance	Harmonized technical specification																																																												
Reaction to Fire	Class A1	EN 442-1 : 2014																																																												
Release of dangerous substances	None																																																													
Surface temperature	Maximum 120 °C																																																													
Resistance to pressure	Leak Test : 1300 kPa Strength Pressure Test: 1690 kPa Declared Max. Working Pressure: 1000 kPa																																																													
Resistance against corrosion:	No corrosion after 100 h humidity																																																													
Resistance against minor impact:	Class 0																																																													
Thermal Output Test	Thermal Output Characteristic Equations (L = length in metres)																																																													
Heights	<table border="1"><thead><tr><th colspan="2">ΔT 50° C</th><th colspan="2">ΔT 60° C</th><th rowspan="2">n</th><th rowspan="2">K_M</th><th rowspan="2">Φ</th></tr><tr><th>Watt/m</th><th>Kcal/hm</th><th>Watt/m</th><th>Kcal/hm</th></tr></thead><tbody><tr><td>300</td><td>864</td><td>743</td><td>1097</td><td>944</td><td>1,3103</td><td>5,132788</td></tr><tr><td>400</td><td>1077</td><td>926</td><td>1368</td><td>1176</td><td>1,3118</td><td>6,360728</td></tr><tr><td>500</td><td>1281</td><td>1102</td><td>1628</td><td>1400</td><td>1,3133</td><td>7,521281</td></tr><tr><td>600</td><td>1479</td><td>1272</td><td>1880</td><td>1617</td><td>1,3148</td><td>8,633063</td></tr><tr><td>700</td><td>1671</td><td>1437</td><td>2124</td><td>1827</td><td>1,3162</td><td>9,700456</td></tr><tr><td>800</td><td>1857</td><td>1597</td><td>2361</td><td>2031</td><td>1,3177</td><td>10,717150</td></tr><tr><td>900</td><td>2040</td><td>1754</td><td>2595</td><td>2231</td><td>1,3192</td><td>11,704390</td></tr></tbody></table>	ΔT 50° C		ΔT 60° C		n	K _M	Φ	Watt/m	Kcal/hm	Watt/m	Kcal/hm	300	864	743	1097	944	1,3103	5,132788	400	1077	926	1368	1176	1,3118	6,360728	500	1281	1102	1628	1400	1,3133	7,521281	600	1479	1272	1880	1617	1,3148	8,633063	700	1671	1437	2124	1827	1,3162	9,700456	800	1857	1597	2361	2031	1,3177	10,717150	900	2040	1754	2595	2231	1,3192	11,704390	Φ = K _m · ΔT ⁿ
ΔT 50° C		ΔT 60° C		n	K _M				Φ																																																					
Watt/m	Kcal/hm	Watt/m	Kcal/hm																																																											
300	864	743	1097	944	1,3103	5,132788																																																								
400	1077	926	1368	1176	1,3118	6,360728																																																								
500	1281	1102	1628	1400	1,3133	7,521281																																																								
600	1479	1272	1880	1617	1,3148	8,633063																																																								
700	1671	1437	2124	1827	1,3162	9,700456																																																								
800	1857	1597	2361	2031	1,3177	10,717150																																																								
900	2040	1754	2595	2231	1,3192	11,704390																																																								

Date: 4.6.2020

Signed for and on behalf of the manufacturer by;


ELBA BASINÇLI DÖKÜM SANAYİ A.Ş.