

LiKe (Hangzhou) Technology Engineering Co.,LTD

Version Number: A0

Effective Date: 2023.12.30

PH2.5-1515-40S-320x160 In-room Full-color Watch Sticker Module

Product Specification

Parameters		
Optical Characteristics	Model	LK-PH2.5-1515-40S-320x160
	Pixel Pitch (MM)	2.5
	Pixel Density (Dots/m ²)	160000
	Pixel Color Configuration	1R1G1B
	Pixel Arrangement(W*H)	128*64
	Scanning	1/40
	Brightness(cd/m ²)	≥550
	Gray Scale (bit)	14
	Refresh Rate(Hz)	≥3840
	Mask Structure	Not included
	Horizontal Visual Angel (Deg)	160 (±10)
Vertical Visual Angel(Deg)	160 (±10)	
Physical	Unit Board Size (L*W)	320*160MM
	Weight	≤0.45kg±0.01kg

LiKe (Hangzhou) Technology Engineering Co.,LTD

Version Number: A0

Effective Date: 2023.12.30


Characteristics	Flatness of Unit Board Cover	≤0.2MM
	Input Voltage (DC)	5V
	Max. Current(ampere)	≤4.5A
	Max. Power of the Module	≤25W
	Max. Power(W/m²)	≤400W
	Avg. Power (W/m²)	≤180W
	Module Installation Structure Mode	Post-installation
	MTBF	≥ten thousand hours
	Life	≥one hundred thousand hours
Usage Environment	Application	In-room
	Working Temperature (°C)	-20°C+45°C
	Working Humidity (RH)	10%-65%RH(No condensation)
	Storage Temperature (°C)	-30°C+60°C
	Storage Humidity (RH)	10%-60%
	Protection Grade	Front IP43

LiKe (Hangzhou) Technology Engineering Co.,LTD

Version Number: A0

Effective Date: 2023.12.30

Size Drawing of Module Kit

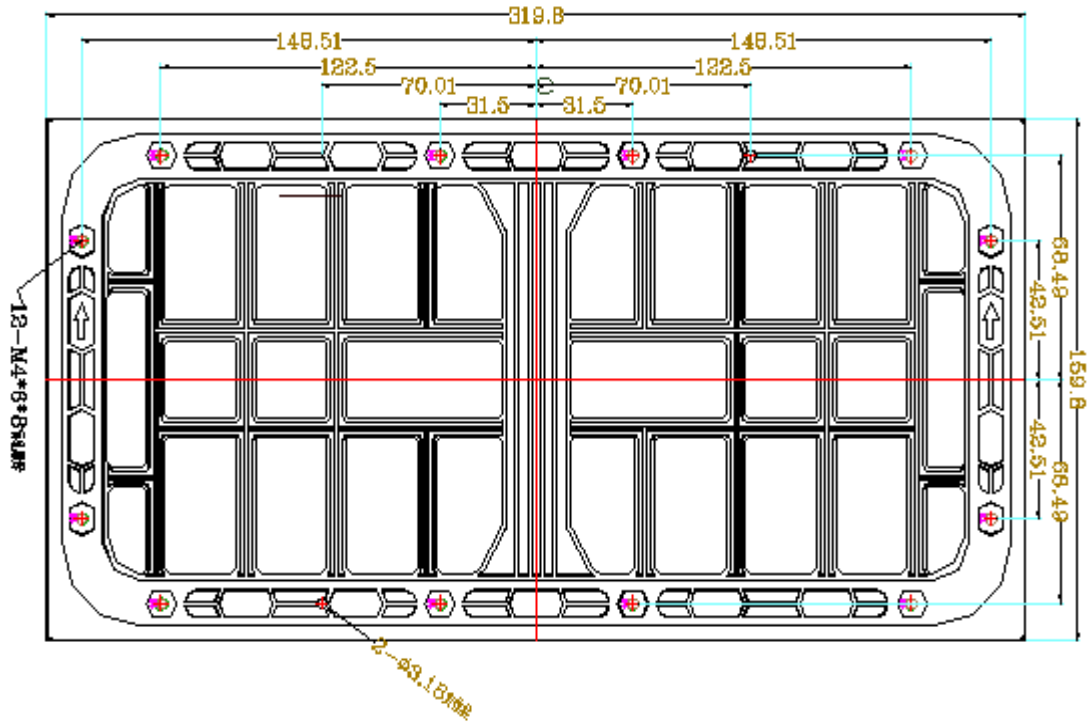


LiKe (Hangzhou) Technology Engineering Co.,LTD


Version Number: A0

Effective Date: 2023.12.30

Module Packaging Diagram



Unit board packaging



Packaging Material: pearl cotton knife card + carton
Packaging Specification: 58*37*40cm / 40PCS
Packaging Weight: 19kg