


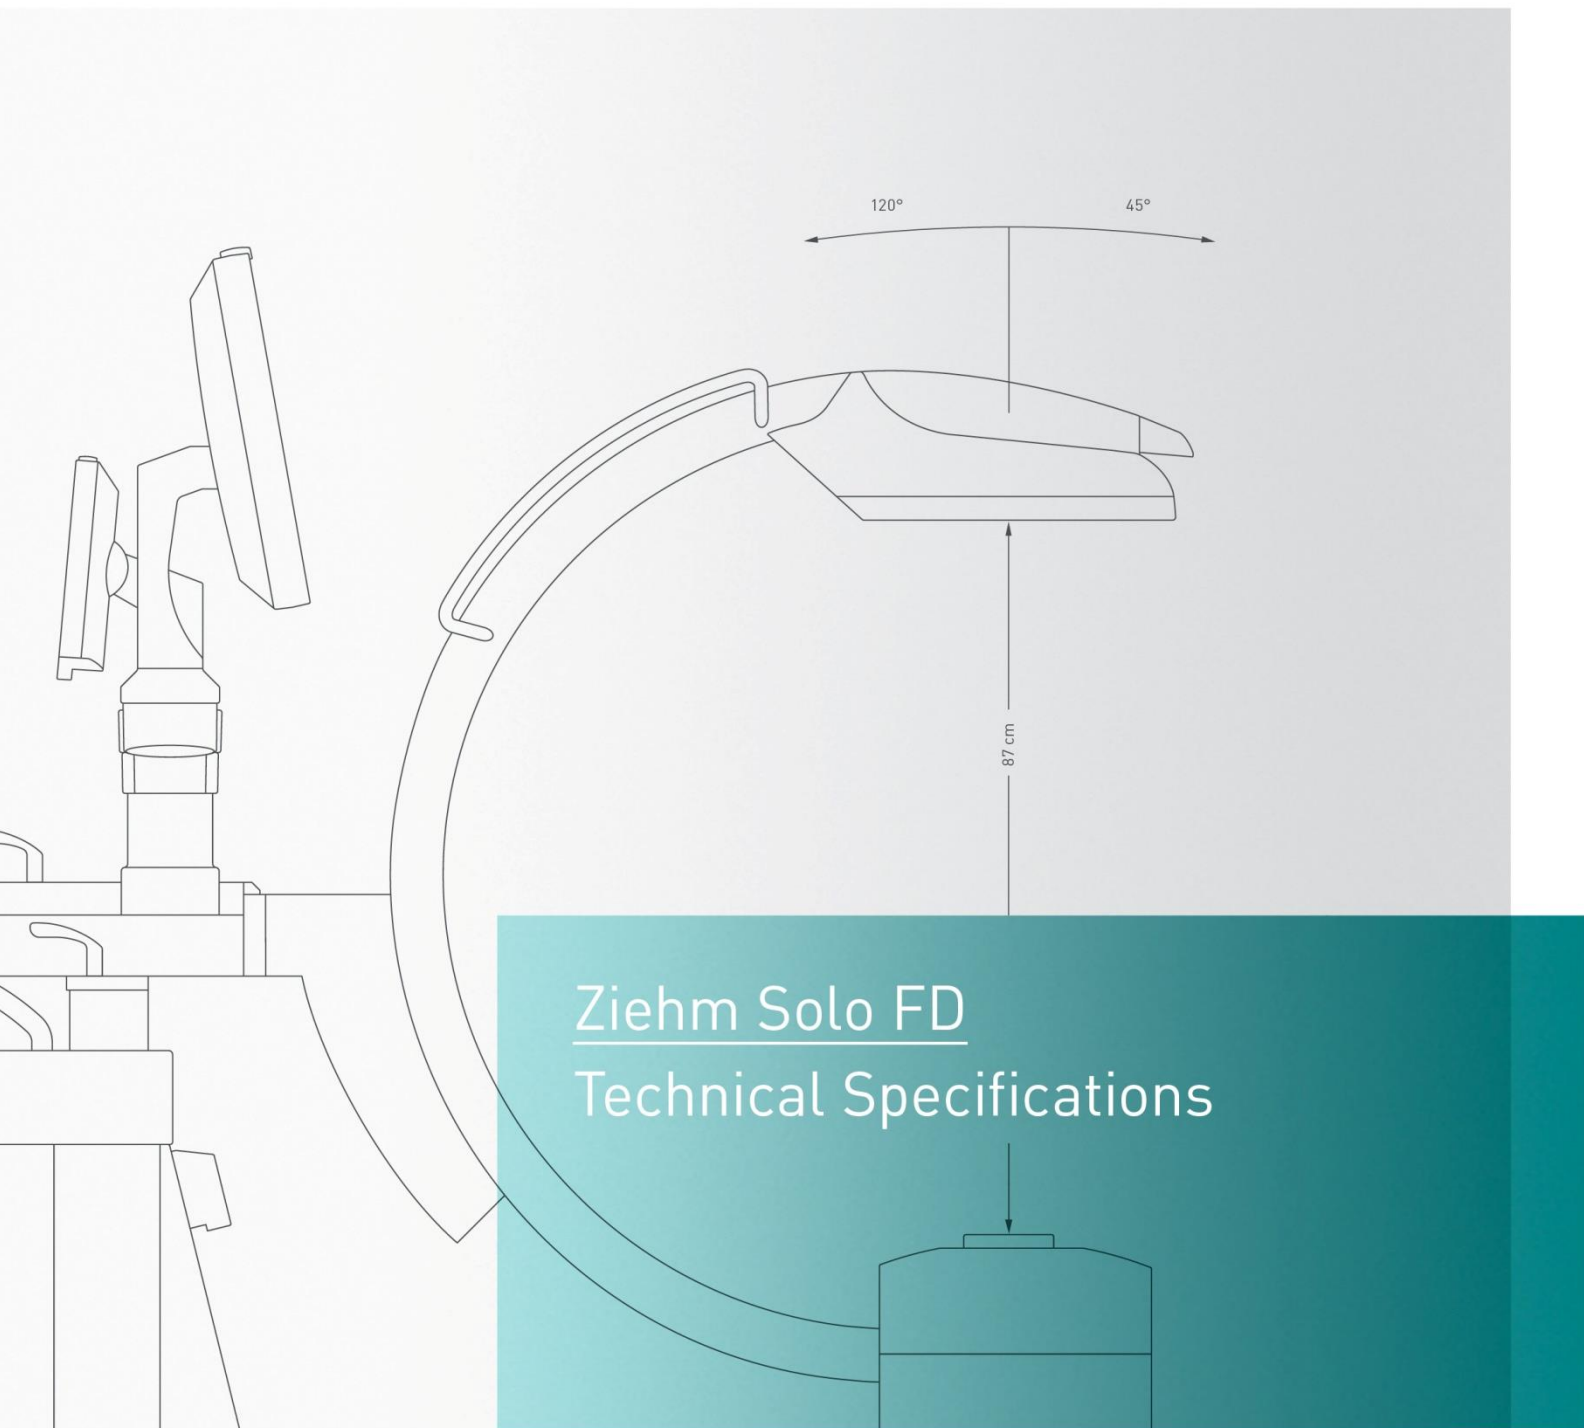

Dimensions and Mechanics

- Motor-driven vertical travel: 42 cm
- Horizontal travel: 22 cm
- Orbital rotation: -120° / +45°
- Angulation: $\pm 225^\circ$
- Swiveling (panning): $\pm 10^\circ$
- Source-image receptor distance: 109 cm
- C-arm vertical free space: 87 cm
- C-arm depth: 68 cm
- Width: 80 cm
- Length: 171 cm / 193 cm
- Height: 175 cm / 217 cm
- Weight C-arm mobile stand (weight can vary depending on balancing and configuration): 347 kg $\pm 6\%$

Brakes

- Steering & braking lever, with parallel movement of the mobile stand in all directions
- Color-coded brake handles for all movements

X-Ray Generator

- X-ray tube: stationary anode
- Single focus: 0.6 (IEC 60336)
- Max. anode heat content: 85 kHU / 60 kJ
- Max. anode heat dissipation: 600 W / 51 kHU/min
- Powered by integrated advanced heat management system
- 1.14 million HU system heat capacity
- 200 W / 17 kHU/min continuous heat dissipation in clinical performance
- Generator type:
 - monoblock
 - high-frequency generator
 - frequency: 40 kHz
 - microprocessor-controlled
- Nominal output (100 kV): 2.0 kW
- Maximum output: 2.4 kW

Filtration

- Total filtration: ≥ 4.3 mm Al + 0.1 mm Cu

Collimator System

- Dedicated pre-collimator for FPD
- Collimator rotation: $\pm 90^\circ$
- Iris collimator: 50-207 mm diameter
- Asymmetric slot collimator: 50-207 mm opening
- Virtual collimation without radiation

Operating Values

- Continuous fluoroscopy:
 - kV range: 40-120 kV
 - mA range: 1.7-11 mA (200-240 V)
- Pulsed fluoroscopy:
 - kV range: 40-120 kV
 - mA range: 0.2-20 mA (200-240 V)
 - pulse width: 10-40 ms
 - pulse rate: 1, 2, 4, 8, 12.5, 25 pulses/s
- Digital radiography (snapshot):
 - kV range: 40-120 kV
 - mA: up to 24 mA

Flat-Panel Detector System

- Type: IGZO technology
- Scintillator: cesium iodide
- Pixel size: 135 μm
- Grayscale: 65,536 gray scale values (16 bit)
- System resolution (Nyquist): 3.7 lp/mm
- Anti-scatter grid: 70 lines/cm; grid ratio 8:1
- Laser positioning device integrated in detector housing
- Auto calibration
- Removable grid (option)
- DQE: @ 0 lp/mm: 79 %
- MTF:
 - 0.5 lp/mm: 80%
 - 1 lp/mm: 57 %
 - 2 lp/mm: 26 %
- Dynamic range: 95 dB
- Frame rate: max. 30 frames/s

Flat-Panel 2121

- Detector matrix:
 - overview format: 1,536 x 1,536 pixels
 - 2.5 lp/mm
 - Mag. mode 1: 1,024 x 1,024 pixels
 - 3.1 lp/mm
 - Mag. mode 2: 768 x 768 pixels
 - 3.4 lp/mm

User Interface

Solo Center - TFT Touchscreen on Monitor Support Arm

- Intuitive icons for ease of use
- Resolution: 640 x 480 pixels
- Multi-lingual user interface
- Ziehm SmartEye live fluoro screen with SmartControl
- Emergency stop button
- X-ray button
- X-ray indication lamp
- SmartArchive

Remote Solo Center – Synchronized Touchscreen for Table Side Control (option)

- Emergency stop button
- X-ray button
- X-ray indication lamp

Monitor

- High-brightness FullHD 27" split monitor:
 - screen size: 27" (69 cm)
 - native resolution: 1,920 x 1,080 pixels
 - viewing angle (horizontal and vertical): 178° (with contrast ratio $\geq 10:1$)
 - contrast ratio : typ. 1,000:1
 - brightness (panel): typ. 1000 cd/m²
 - brightness (calibrated): ≥ 550 cd/m²
 - dimensions: 65 cm x 39 cm x 6 cm
- High-brightness and high-contrast 19" DUO monitor (option):
 - screen size: 2 x 19" (48 cm)
 - native resolution: 1,280 x 1,024 pixels
 - viewing angle (horizontal and vertical): 178° (with contrast ratio:10:1)
 - tilt range: $\pm 10^\circ$
 - contrast ratio: typ. 1,000:1
 - brightness (panel): typ. 1,000 cd/m²
 - brightness (calibrated): ≥ 550 cd/m²
 - dimensions: 68 cm x 45 cm x 9 cm

Digital Image Processing

Real-Time Processing Functions

- Last Image Hold
- Recursive filter: 4 levels (out of 16)
- Edge enhancement filter: 5 levels
- Windowing and step windowing
- Digital image rotation and reversal without radiation
- Grayscale inversion
- Digital collimators
- Ziehm Adaptive Image Processing (ZAIP)

Application-Oriented Anatomical Programs

- Bone: Extremities, Trunk

- Heart, Abdomen, Soft
- Vascular (option): Extremities
- Urology (option)

Additional Functions

- Metal
- Reposition
- Pediatric

Object Detected Dose Control (ODDC)

- Object detection
- Motion detection
- Automatic dose reduction
- Automatic metal correction

Image Acquisition

- Autosave
- Cine loop with auto-playback:
 - sequential image storage and display:
 - 1 – 8 frames/s
 - 1 – 12.5 frames/s (option)
 - 1 – 25 frames/s (option)
 - start, stop and replay rate controls

Postprocessing Functions

- Edge enhancement: 5 levels
- Zoom: 3 levels
- Image rotation
- Windowing and step windowing
- Grayscale inversion
- Image cropping (digital collimators)
- Digital measurement functions: distance/angle (option)

Vascular Package (Option)

- DSA real-time subtraction with re-masking capability
- MSA max. opacification sequence
- Single frame, multiframe RSA (roadmapping)
- Pixel shift / landmarking

Anatomical Marking Tool - AMT (Option)

- Mark anatomical structures
- Indicate side of body

Digital Memory

- Storage capacity: 100,000 images
- Digital image processing: up to 32 bit

Data Organization

- Patient-based data management with 16-image mosaic display
- Pre-registration via DICOM Worklist (option)
- Manual input or emergency registration
- Calculated Dose Area Product (DAP)
- DAP value tagged to stored image
- Air Kerma dose display
- Air Kerma value tagged to stored image
- HIPAA security package (option)
- Radiation Dose Structured Report (RDSR)

Video Output

- Full HD SDI (split display), 1,920 x 1,080 pixels, 60Hz

Archiving

- Paper printer (option)
- USB port:
 - storage capacity depends on storage medium
 - formats: DICOM, TIFF, Multimedia (AVI)
 - downsized formats: DICOM, JPG
- DVD-RW drive (option):
 - 4.7 GB storage capacity
 - formats: DICOM, TIFF, Multimedia (AVI)
 - downsized formats: DICOM, JPG
- DICOM viewer software for DVD and USB 3.0 device

Networking

- Ziehm NetPort (option): DICOM 3.0 interface (LAN interface or WLAN connection) for digital network integration
- 'Primary Capture' mode
- Available DICOM Classes:
 - Storage Class incl. multiframe capability and Storage Commitment
 - Print Class
 - Media Class
 - Worklist Class incl. Modality Performed Procedure Step (MPPS)
 - Query Class
 - Retrieve Class
 - Verification Class
- WLAN interface for wireless data transfer (option)

Electrical Requirements

- Power supply: 100-240 V_{AC} ($\pm 10\%$), 50/60 Hz
- Current consumption:
 - 10 A continuous (100-120 V)
 - 8 A continuous (200-240 V)
- Max. impedance:
 - $\leq 0.3\ \Omega$ (100-200 V)
 - $\leq 0.6\ \Omega$ (220-240 V)
- Installation fuse (release characteristic compliant to VDE 0641, Part 11; EN 60898 & IEC 60898):
 - 100-200 V: C 20 A or C 32 A
 - 220-240 V: C 16 A

Safety Features

- Electrical Protection Class I equipment, Type B
- Security key switch (X-ray)
- Emergency stop button on the C-arm

Options

- Laser positioning device integrated in generator housing
- Measured dose area product (DAP) with digital display
- Video connectors for external monitors:
 - DVI
 - analog
- Connector for external radiation lamp

- Additional handrails on the C for orbital rotation support
- Wireless Video Package: wireless transmission of the left /right image from the C-arm to external monitors
- Power-on key switch
- Field Transport Solution, incl. all-terrain wheels, towing and mounting device bar

Accessories

- Disposable sterile covers
- Skin Cone for the generator: A removable mechanical extension of the generator cap in order to avoid a focal spot to skin distance smaller than 30 cm.
- Remote Solo Center TFT touchscreen
- Dual Plus footswitch with programmable configuration (also available with protection bar)
- Wireless multifunctional footswitch Dual Plus with programmable configuration (also available with protection bar)

Regulatory Compliance

Device Classification

- MDD 93/42 EEC, Annex IX: IIb
- U.S. 21CFR: II

Compliance to QM Requirements

- EN ISO 13485 certified
- MDD 93/42/EEC, Annex II certified
- MDSAP certified
 - Australian Therapeutic Good Regulation
 - Brazil RDC ANVISA n. 16/2013, RDC ANVISA n. 23/2013, RDC ANVISA n. 67/2009
 - Canada Medical Device Regulations Part 1 – SOR 98/282
 - Japan MHLW Ministerial Ordinance 169
 - United States 21 CFR 820
- ISO 14971
- IEC 62304
- IEC 62366

Product Compliance

- IEC 60601-1 and relevant collateral and particular standards
- U.S. 21CFR subchapter J

ZIEHM VIEWING STATION (Option)

Dimensions and Mechanics

- Width: 68 cm
- Depth: 64 cm
- Height: 175 cm
- Weight (weight can vary depending on configuration): 122 kg $\pm$ 8 %


Monitors

- High-brightness FullHD 27" split monitor (option):
 - screen size: 27" (69 cm)
 - native resolution: 1,920 x 1,080 pixels
 - viewing angle (horizontal and vertical): 178°
(with contrast ratio $\geq$ 10:1)
 - contrast ratio : typ. 1,000:1
 - brightness (panel): typ. 1000 cd/m²
 - brightness (calibrated): $\geq$ 550 cd/m²
 - dimensions: 65 cm x 39 cm x 6 cm
- High-brightness and high-contrast 19" DUO monitor (option):
 - screen size: 2 x 19" (48 cm)
 - native resolution: 1,280 x 1,024 pixels
 - viewing angle (horizontal and vertical): 178°
(with contrast ratio:10:1)
 - tilt range: $\pm$ 10°
 - contrast ratio: typ. 1,000:1
 - brightness (panel): typ. 1,000 cd/m²
 - brightness (calibrated): $\geq$ 550 cd/m²
 - dimensions: 68 cm x 45 cm x 9 cm


Archiving

- Paper printer, mounted on viewing station (option)

Ziehm Solo FD
(C-Arm Mobile Stand)

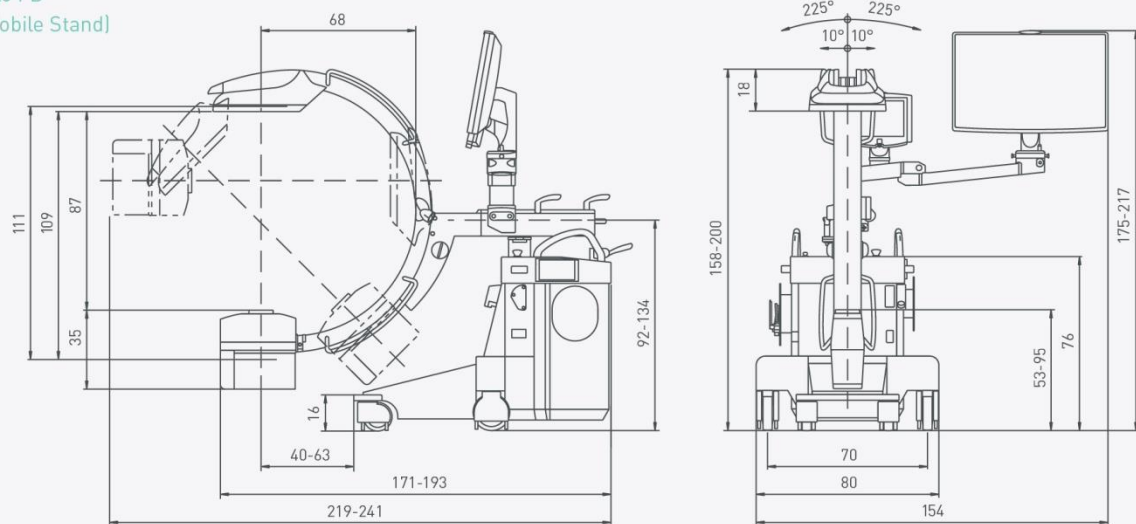

Ziehm
Viewing Station

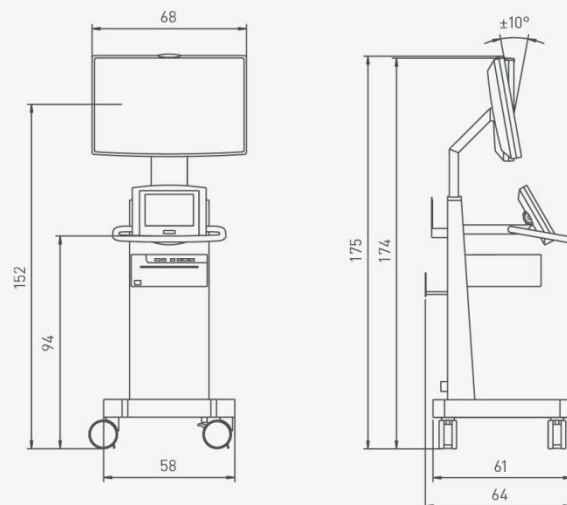

All dimensions in cm.

HEADQUARTERS

Germany

Ziehm Imaging GmbH
Lina-Ammon-Strasse 10
90471 Nuremberg, Germany
Phone +49 911 660 67 0
Fax +49 911 660 67 390
info@ziehm.com

Italy

Ziehm Imaging Srl
Via Paolo Borsellino, 22/24
42124 Reggio Emilia, Italy
Phone +39 05 22 61 08 94
Fax +39 05 22 61 24 77
italy@ziehm.com

China

Ziehm Medical Shanghai Co., Ltd.
Hongqiao New Tower Centre
Rm 02-06, 29/F
83 Loushanguan Road
Shanghai, P.R. China; 200336
Phone +86 21 62 36 99 03
Fax +86 21 62 36 99 16
china@ziehm.net.cn

USA

Ziehm Imaging
A division of Ziehm-Orthoscan, Inc.
6280 Hazeltine National Dr
Orlando, FL 32822, USA
Toll Free +1 800 503 4952
Phone +1 407 6 15 8560
Fax +1 407 6 15 8561
mail@ziehm.com

Spain

Ziehm Imaging Spain SLU
Avenida Pérez Galdós 13-14^a
46007 Valencia, Spain
Phone +34 960 911 152
spain@ziehm.com

Singapore

Ziehm Imaging Singapore Pte. Ltd.
23 Serangoon North Ave 5
#05-04 BTC Center
Singapore 554530, Singapore
Phone +65 65 30 39 40
singapore@ziehm.com

Brazil

Ziehm Medical do Brasil
Av. Roque Petroni Jr.,
1089 cj 904
04707-000 São Paulo, Brazil
Phone +55 11 30 33 59 99
Fax +55 11 30 33 59 97
brazil@ziehm.com

France

Ziehm Imaging S.A.R.L.
1, Allée de Londres
91140 Villejust, France
Phone +33 1 69 07 16 65
Fax +33 1 69 07 16 96
france@ziehm.com

Japan

Ziehm Imaging Japan KK
REID-C Nihonbashi Koamicho bldg 2F
11-5 Nihonbashi Koamicho Chuo-ku
Tokyo 103-0016, Japan
Phone +81 3 5643 5791
Fax +81 3 3663 5278
japan@ziehm.com

Austria

Ziehm Imaging Austria GmbH
Ziegelfeldstrasse 10
3430 Tulln an der Donau
Austria
Phone +43 2272 66441
austria@ziehm.com

Finland

Ziehm Imaging Oy
Kumitehtaankatu 5
04260 Kerava, Finland
Phone +358 4 49 75 75 37
finland@ziehm.com