

B-Vak Mini Wound Drainage System


- ▶ For low pressure wound drainage
- ▶ Approximately 25 ml bellow capacity
- ▶ Easy discharge of air and contents
- ▶ Radiopaque redon drain and stainless steel needle
- ▶ Color coded connector



Ref	Drain Size	Drain I.D.	Color
173 0611 1	06 Ch	1.0 mm	Green ■
173 0811 1	08 Ch	1.4 mm	Blue ■
173 1011 1	10 Ch	1.7 mm	Black ■

Redon Drain

- ▶ Appropriate degree of hardness provides kink resistance and easy insertion
- ▶ Atraumatic, soft rounded open tip
- ▶ Cross-perforated
- ▶ Radiopaque line
- ▶ Cm depth marks
- ▶ Length: 50 cm

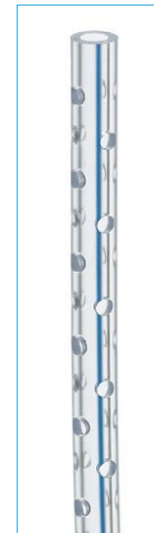




Ref	Drain Size	Drain I.D.
790 0601 1	06 Ch	1.0 mm
790 0801 1	08 Ch	1.5 mm
790 1001 1	10 Ch	1.8 mm
790 1201 1	12 Ch	2.0 mm
790 1401 1	14 Ch	2.5 mm
790 1601 1	16 Ch	3.3 mm
790 1801 1	18 Ch	4.0 mm



Three Way Stopcock

- ▶ For pressures up to 5 bar (72 PSI)
- ▶ 360° rotation
- ▶ Color coded arrows indicating flow direction
- ▶ Transparent housing
- ▶ Rotating male luer lock and two female luer lock connectors
- ▶ Lipid Resistance

Ref	Color
760 3011 1	White 
760 3031 1	Blue 
760 3041 1	Red 



Three Way Stopcock

1200 PSI

- ▶ For pressures up to 83 bar (1200 PSI)
- ▶ 180° rotation
- ▶ Arrows indicating flow direction
- ▶ Transparent housing
- ▶ Rotating male luer lock and two female luer lock connectors



Ref
760 3111 1

Manifold

- ▶ Flat with cross handle
- ▶ Pressure tested
- ▶ Arrows to indicate the direction of flow
- ▶ Clear housing for maximal visual inspection
- ▶ Color coded
- ▶ Female luer connectors

Ref	
765 0301 1	Trio
765 0501 1	Quinto



Manifold

Pressure

- ▶ For pressures up to 41 bar (600 PSI)
- ▶ Arrows to indicate the direction of flow
- ▶ Clear housing for maximal visual inspection
- ▶ Rotating male luer and female luer connectors



Ref		Position
765 1301 1	Trio	Right