





AESCULAP / B. Braun

Kompatible Anschlüsse  
compatible connections:  
Acculan/Comfort  
GA440, GA523, GA623,  
GA633, GA640, GB125R,  
GB129, GB431, GB432

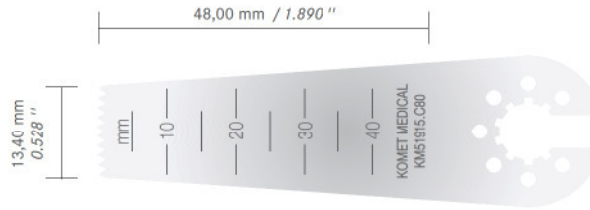


<b>REF</b>	<b>KM51915.C80</b>				
Materialdicke Material Thickness	<b>0,40 mm</b> 0.016 "	Schnittstärke Cutting Thickness	<b>0,60 mm</b> 0.024 "		

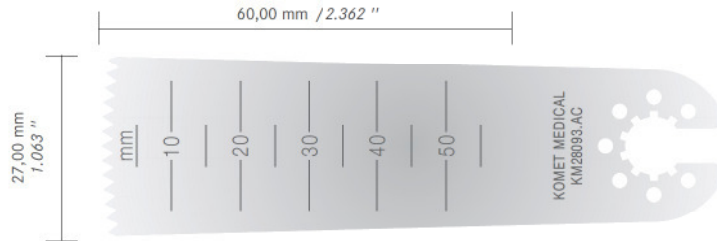

<b>REF</b>	<b>KM28093.AC</b>				
Materialdicke Material Thickness	<b>0,60 mm</b> 0.024 "	Schnittstärke Cutting Thickness	<b>0,80 mm</b> 0.031 "		

Kompatible Anschlüsse  
compatible connections:  
GB091, GB131R,  
GA621R

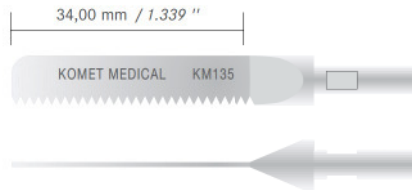


<b>REF</b>	<b>KM135</b>				
Materialdicke Material Thickness	<b>0,60 mm</b> 0.024 "	Schnittstärke Cutting Thickness	<b>1,00 mm</b> 0.047 "		

Kompatible Anschlüsse  
compatible connections:  
GD305, GD310




<b>REF</b>	<b>PC320</b>				
Materialdicke Material Thickness	<b>0,30 mm</b> 0.012 "	Schnittstärke Cutting Thickness	<b>0,40 mm</b> 0.016 "		

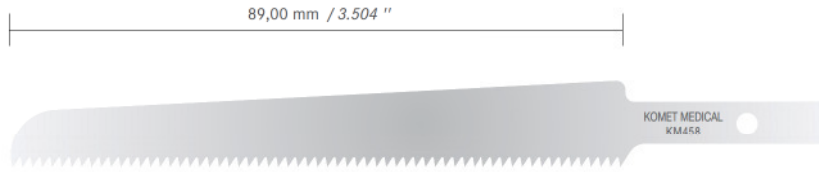


Kompatible Anschlüsse  
compatible connections:  
PowerPro Pneumatic  
PRO6185, PowerPro  
Electric II PRO6135,  
PowerPro Max  
PRO5400M, MPower 2  
PRO6400M, reciprocating  
saws.


REF	<b>KM458</b>	Schnittstärke	<b>1,10 mm</b>			
Materialdicke	<b>0,60 mm</b>	Cutting Thickness	<b>0,043 "</b>			
	0,024 "					

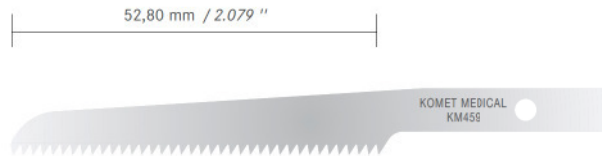


REF	<b>KM459</b>	Schnittstärke	<b>1,09 mm</b>			
Materialdicke	<b>0,60 mm</b>	Cutting Thickness	<b>0,043 "</b>			
	0,024 "					

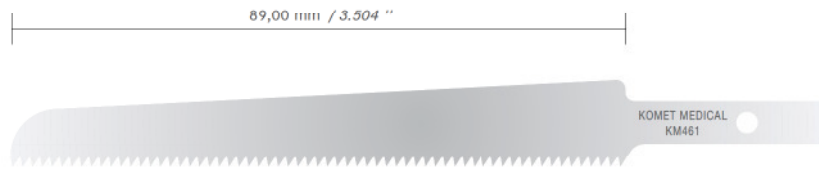

REF	<b>KM461</b>	Schnittstärke	<b>1,70 mm</b>			
Materialdicke	<b>1,20 mm</b>	Cutting Thickness	<b>0,067 "</b>			
	0,047 "					

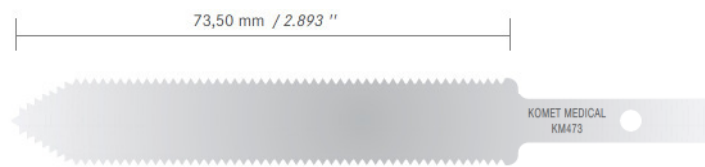

REF	<b>KM473</b>	Schnittstärke	<b>1,00 mm</b>			
Materialdicke	<b>0,60 mm</b>	Cutting Thickness	<b>0,039 "</b>			
	0,024 "					

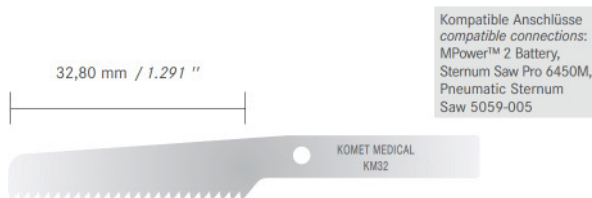

Kompatible Anschlüsse  
compatible connections:  
MPower™ 2 Battery,  
Sternum Saw Pro 6450M,  
Pneumatic Sternum  
Saw 5059-005



Kompatible Anschlüsse  
compatible connections:  
Micro Power™ 6023-023,  
Micro Choice 5020-023,  
Micro 100 5023-010,  
Micro E 5040-003  
reciprocating saw

REF	<b>KM32</b>	Schnittstärke	<b>1,05 mm</b>	REF	<b>KM060</b>	Schnittstärke	<b>0,60 mm</b>
Materialdicke	<b>0,60 mm</b>	Cutting Thickness	<b>0,041 "</b>	Materialdicke	<b>0,40 mm</b>	Cutting Thickness	<b>0,024 "</b>
	0,024 "				0,016 "		


Alle Abbildungen in aktueller Größe (1:1)  
All saw blades shown in actual size





Kompatible Anschlüsse  
compatible connections:  
CX 600, DPX 673


DeSoutter

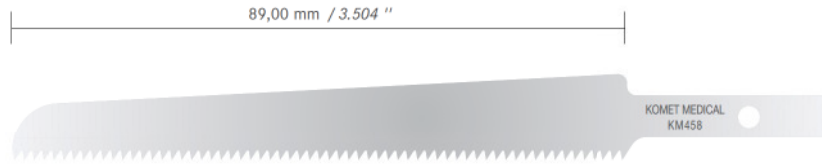

<b>REF</b>	<b>KM458</b>					
Materialdicke Material Thickness	<b>0,60 mm</b> 0.024 "	Schnittstärke Cutting Thickness	<b>1,10 mm</b> 0.043 "			



<b>REF</b>	<b>KM459</b>					
Materialdicke Material Thickness	<b>0,60 mm</b> 0.024 "	Schnittstärke Cutting Thickness	<b>1,09 mm</b> 0.043 "			

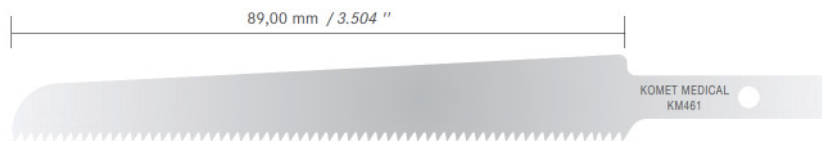

<b>REF</b>	<b>KM461</b>					
Materialdicke Material Thickness	<b>1,20 mm</b> 0.047 "	Schnittstärke Cutting Thickness	<b>1,70 mm</b> 0.067 "			



<b>REF</b>	<b>KM473</b>					
Materialdicke Material Thickness	<b>0,60 mm</b> 0.024 "	Schnittstärke Cutting Thickness	<b>1,00 mm</b> 0.039 "			




Alle Abbildungen in aktueller Größe (1:1)  
All saw blades shown in actual size





Kompatible Anschlüsse  
compatible connections:  
Serie 7000/7402/  
7507/7400/7700


MicroAire®

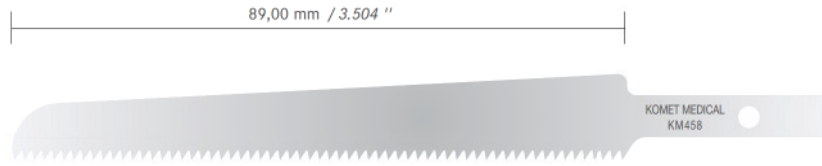

<b>REF</b>	<b>KM458</b>				
Materialdicke Material Thickness	<b>0,60 mm</b> 0.024 "	Schnittstärke Cutting Thickness	<b>1,10 mm</b> 0.043 "		




<b>REF</b>	<b>KM459</b>				
Materialdicke Material Thickness	<b>0,60 mm</b> 0.024 "	Schnittstärke Cutting Thickness	<b>1,09 mm</b> 0.043 "		

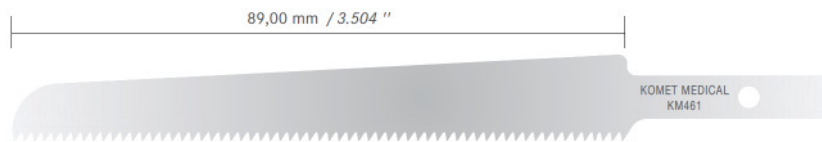

<b>REF</b>	<b>KM461</b>				
Materialdicke Material Thickness	<b>1,20 mm</b> 0.047 "	Schnittstärke Cutting Thickness	<b>1,70 mm</b> 0.067 "		




<b>REF</b>	<b>KM473</b>				
Materialdicke Material Thickness	<b>0,60 mm</b> 0.024 "	Schnittstärke Cutting Thickness	<b>1,00 mm</b> 0.039 "		




Alle Abbildungen in aktueller Größe (1:1)  
All saw blades shown in actual size





Kompatible Anschlüsse  
compatible connections:  
4107, 298-97, 297-87,  
296-87, 2107, 296-97,  
6207, 7207

<b>REF</b>	<b>KM97</b>					
Materialdicke Material Thickness	<b>0,80 mm</b> 0.031 "	Schnittstärke Cutting Thickness	<b>1,00 mm</b> 0.039 "			

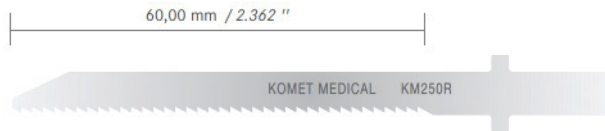


Kompatible Anschlüsse  
compatible connections:  
4206, 4106, 2106,  
296-96, 6206, 7206,  
reciprocating saw


<b>REF</b>	<b>KM250R</b>					
Materialdicke Material Thickness	<b>0,60 mm</b> 0.024 "	Schnittstärke Cutting Thickness	<b>1,10 mm</b> 0.039 "			



<b>REF</b>	<b>KM275R</b>					
Materialdicke Material Thickness	<b>0,60 mm</b> 0.024 "	Schnittstärke Cutting Thickness	<b>1,00 mm</b> 0.039 "			

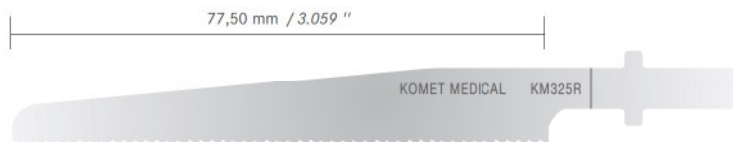

<b>REF</b>	<b>KM325R</b>					
Materialdicke Material Thickness	<b>0,80 mm</b> 0.031 "	Schnittstärke Cutting Thickness	<b>1,00 mm</b> 0.039 "			

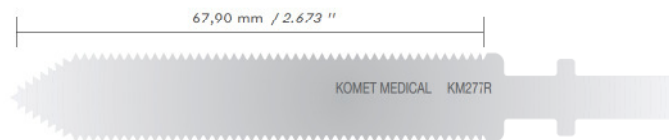

<b>REF</b>	<b>KM277R</b>					
Materialdicke Material Thickness	<b>1,00 mm</b> 0.039 "	Schnittstärke Cutting Thickness	<b>1,20 mm</b> 0.047 "			

Alle Abbildungen in aktueller Größe (1:1)  
All saw blades shown in actual size



Kompatible Anschlüsse    TPS 5100-37    Core 5400-37  
 compatible connections:    Command 2 2296-37/237    reciprocating saw



<b>REF</b>	<b>KM5140.010</b>		
Materialdicke Material Thickness	<b>0,40 mm</b> 0.016 "	Schnittstärke Cutting Thickness	<b>0,40 mm</b> 0.016 "



<b>REF</b>	<b>KM5140.011</b>		
Materialdicke Material Thickness	<b>0,40 mm</b> 0.016 "	Schnittstärke Cutting Thickness	<b>0,40 mm</b> 0.016 "



<b>REF</b>	<b>KM5140.012</b>		
Materialdicke Material Thickness	<b>0,40 mm</b> 0.016 "	Schnittstärke Cutting Thickness	<b>0,40 mm</b> 0.016 "



<b>REF</b>	<b>KM5140.020</b>		
Materialdicke Material Thickness	<b>0,40 mm</b> 0.016 "	Schnittstärke Cutting Thickness	<b>0,60 mm</b> 0.024 "



<b>REF</b>	<b>KM5140.106</b>		
Materialdicke Material Thickness	<b>0,40 mm</b> 0.016 "	Schnittstärke Cutting Thickness	<b>0,40 mm</b> 0.016 "



<b>REF</b>	<b>KM5140.107</b>		
Materialdicke Material Thickness	<b>0,40 mm</b> 0.016 "	Schnittstärke Cutting Thickness	<b>0,40 mm</b> 0.016 "




<b>REF</b>	<b>KM5140.123</b>		
Materialdicke Material Thickness	<b>0,40 mm</b> 0.016 "	Schnittstärke Cutting Thickness	<b>0,40 mm</b> 0.016 "



<b>REF</b>	<b>KM5140.133</b>		
Materialdicke Material Thickness	<b>0,40 mm</b> 0.016 "	Schnittstärke Cutting Thickness	<b>0,40 mm</b> 0.015 "



<b>REF</b>	<b>KM5140.233</b>		
Materialdicke Material Thickness	<b>0,40 mm</b> 0.016 "	Schnittstärke Cutting Thickness	<b>0,40 mm</b> 0.016 "



<b>REF</b>	<b>KM5160.011</b>		
Materialdicke Material Thickness	<b>0,60 mm</b> 0.024 "	Schnittstärke Cutting Thickness	<b>1,00 mm</b> 0.039 "

Alle Abbildungen in aktueller Größe (1:1)  
 All saw blades shown in actual size





Stryker

Kompatible Anschlüsse compatible connections:	TPS 5100-37 Command 2 2296-37/237	Core 5400-37 reciprocating saw
--	--------------------------------------	-----------------------------------



<b>REF</b>	<b>KM5160.012</b>		
Materialdicke Material Thickness	<b>0,60 mm</b> 0.024 "	Schnittstärke Cutting Thickness	<b>1,00 mm</b> 0.039 "

<b>REF</b>	<b>KM5160.123</b>		
Materialdicke Material Thickness	<b>0,60 mm</b> 0.024 "	Schnittstärke Cutting Thickness	<b>1,00 mm</b> 0.039 "



<b>REF</b>	<b>KM5160.233</b>		
Materialdicke Material Thickness	<b>0,60 mm</b> 0.024 "	Schnittstärke Cutting Thickness	<b>1,00 mm</b> 0.039 "

--	--	--	--



--	--	--	--	--	--	--	--

--	--	--	--	--	--	--	--

--	--	--	--	--	--	--	--






Synthes

Kompatible Anschlüsse  
compatible connections:  
Colibri II 532-021




<b>REF</b>	<b>PC532.066</b>					
Materialdicke Material Thickness	<b>0,40 mm</b> 0.016 "	Schnittstärke Cutting Thickness	<b>0,70 mm</b> 0.028 "			

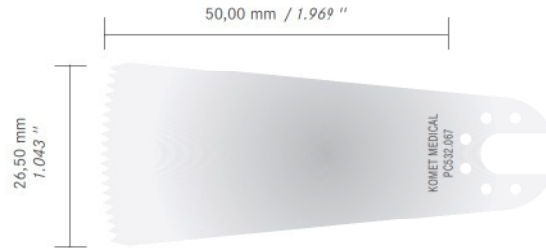

<b>REF</b>	<b>PC532.067</b>					
Materialdicke Material Thickness	<b>0,40 mm</b> 0.016 "	Schnittstärke Cutting Thickness	<b>0,70 mm</b> 0.028 "			

Kompatible Anschlüsse  
compatible connections:  
Compact Air Drive/  
Power Drive 511.902,  
Air Power Line  
511.615, Battery Power  
Line 530.615

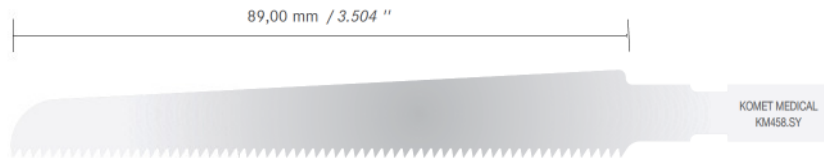

<b>REF</b>	<b>KM458.SY</b>					
Materialdicke Material Thickness	<b>1,20 mm</b> 0.047 "	Schnittstärke Cutting Thickness	<b>1,40 mm</b> 0.055 "			