




Material	PVC Coated Galvanised Steel
Compression Resistance	320 Newton / 60sec
IP Rating	IP54
Temperature Resistance	-20 C / +70 C
Color Options	Black / Gray, ther colors (on request)

Application Fields

Machinery Industry
 Preecting cables under ground
 Chemical Industry
 Protecting electrical installations

Model Code	CSA (Metric Size)	UL (Inch Size)	ISO BS EN	Internal Diamater		External Diamater		Min Bend Radius
				Min.	Max.	Min.	Max.	
PSB 9	9			9,0	9,2	13,2	13,5	30
PSB 10	10	1/4"	1/4"	9,7	10,2	13,9	14,5	30
PSB 11	11			10,9	11,2	15,2	15,6	40
PSB 12	12	3/8"	16	12,3	12,8	16,6	17,2	40
PSB 14	14			13,9	14,2	18,4	18,8	46
PSB 16	16	1/2"	20	15,5	16,0	20,1	20,7	46
PSB 18	18			17,6	18,0	22,3	22,8	52
PSB 21	21	3/4"	25	20,5	21,0	25,5	26,1	52
PSB 26	26	1"	32	25,5	26,4	31,2	32,2	63
PSB 29	29			28,6	29,0	34,4	34,9	63
PSB 32	32			32,0	32,5	37,9	38,5	68
PSB 35	35	1 1/4"	40	34,5	35,0	40,6	41,2	80
PSB 37	37			37,0	37,5	43,1	43,7	90
PSB 40	40	1 1/2"	50	39,5	40,1	45,6	46,4	95
PSB 42	42			41,5	42,0	47,8	48,5	100
PSB 45	45			44,5	45,0	51,3	52,0	105
PSB 51	51	2"	63	50,6	51,2	57,5	58,3	115
PSB 63	63	2 1/2"	70	62,9	63,6	71,8	72,4	160
PSB 78	78	3"	80	77,9	78,7	87,2	87,9	175
PSB 102	102	4"	100	101,6	102,6	111,2	112,3	215

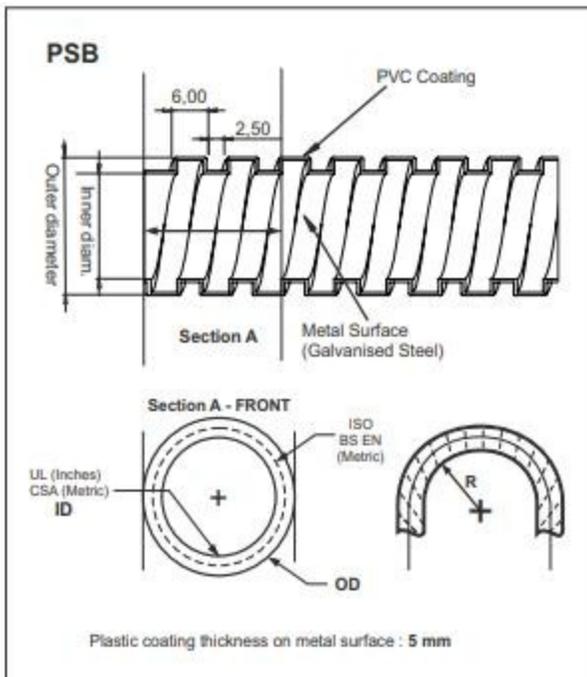

Connection sample to wire mesh cable tray