



Incubators for bacteriology and cell culture "Incubig-TFT"

PREMIER
SERIE

NATURAL CONVECTION.
MICROPROCESSOR CONTROL AND DIGITAL DISPLAY OF TEMPERATURE AND TIME.
ADJUSTABLE TEMPERATURE FROM AMBIENT +5 °C TO 80 °C.
STABILITY: ±0.2 °C, UP TO 37 °C. HOMOGENEITY: ±0.7 °C, UP TO 37 °C.
SET ERROR: ±2% OF THE WORKING TEMPERATURE, RESOLUTION 0.1 °C
INTERNAL TEMPERED GLASS DOOR.



SAFETY:

STANDARD EN.61010 OVER TEMPERATURE CUT OUT FITTED.
STANDARD DIN 12880. ADJUSTABLE SAFETY THERMOSTAT FITTED.


Capacities up to 720 litres

FEATURE

Microprocessor control and 4.3 inches TFT touch screen display.
Large surface area heating elements.
Inner chamber made of AISI 304 stainless steel.
Double door, interior door of tempered glass that allows the user to see the contents of the chamber without opening the door.
Adjustable air vent.
Epoxy covered external case.

STANDARD EQUIPMENT

For Part No. 2000238, 2 shelves and 4 shelf guides.
For Part No. 2000239 and 2000240, 2 shelves.

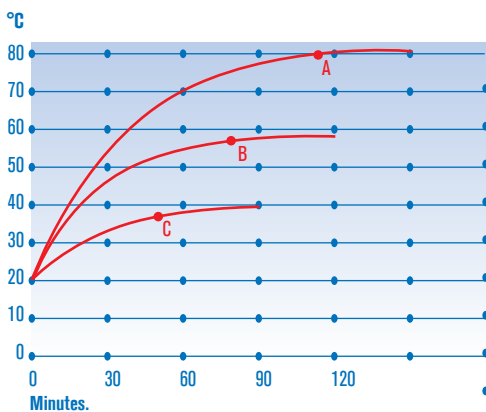

Performance graph of temperature and time.
A. Set at 80 °C: 1 h 45'.
B. Set at 56 °C: 1 h 10'.
C. Set at 37 °C: 54'.



CONTROL PANEL

4.3 inches TFT touch screen models:

1. Main switch.
2. TFT touch screen: Visual audible alarm. Clock calendar. On / Off programming. Up to 10 work programs. Up to 6 segments per program. Stability time in each segment (from 1 min to 99h) . Alarms and events storage. Probe error detection. Self Diagnostics. Ramps between segments.

- Network failure detection and saving.
- Over temperature and low temperature alarms and memorization (date, start time, end time and temperature).
- Safety thermostat (TS) by software.
- Mechanic safety thermostat (TS) .
- USB and RS -232 output.
- Temperature control auto-tuning.
- Configurable parameters: Date / time, temperature correction , data collection interval, language (English, Spanish and French) , °C / °F selection , over temperature and low temperature limit.
- 3. RS-232 output.
- 4. USB output.
- 5. Security thermostat.



MODELS

Part No.	Type	Capacity litres	Height / Width / Depth (interior) cm			Height / Width / Depth (exterior) cm			N° of shelf guides	Power W	Weight Kg
2000238	1 door	288	80	60	60	97	91	76	8	570	87
2000239	2 door	400	100	80	50	130	114	75	10	1100	160
2000240	2 door	720	120	100	60	152	134	85	12	1600	225

SPARES Shelves and guides.

Oven Part No.	2000238	2000239	2000240
Shelves	2002372	2000063	2000064
Guides (2) (Set)	2002371	-	-

Each self requires two guides i.e. one set.