


Laboratory Refrigerator(2-8°C)



Laboratory Refrigerator

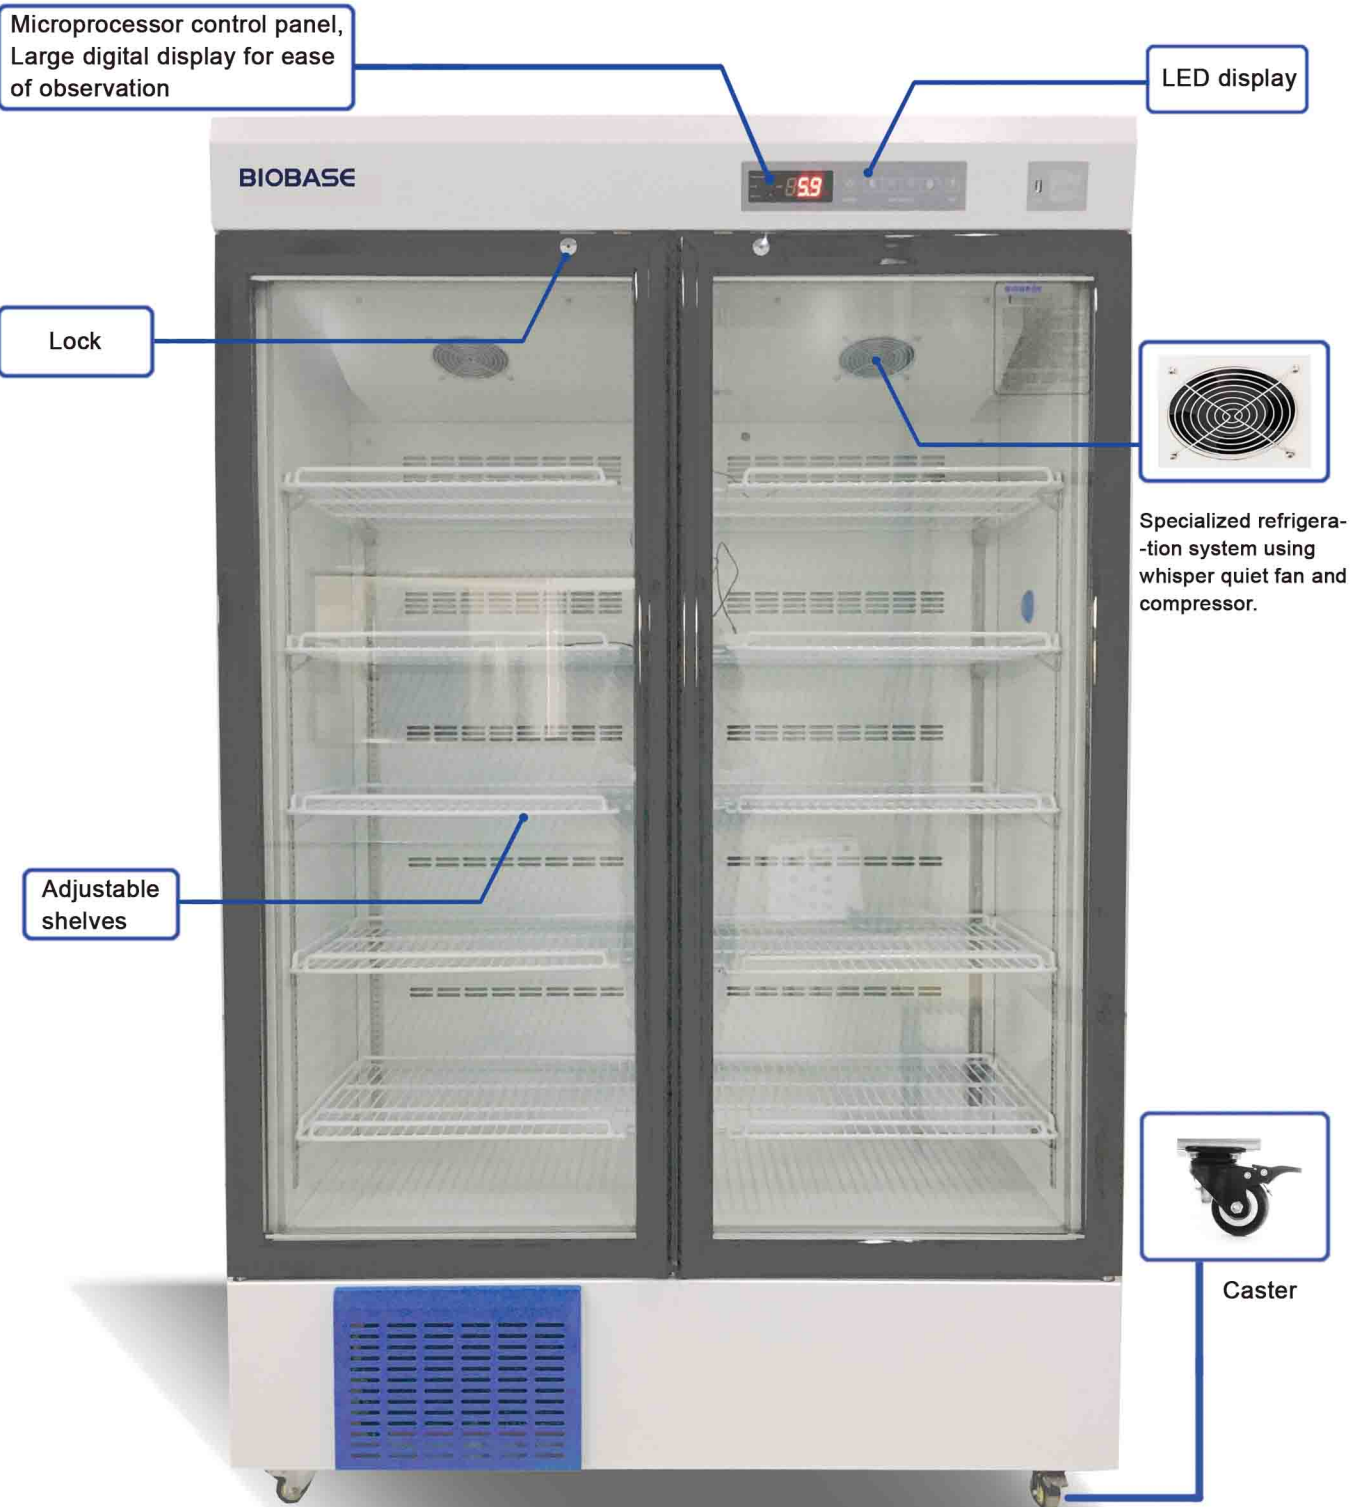

Technical Parameters

Model		BPR-5V160	BPR-5V250	BPR-5V310	BPR-5V588	BPR-5V1000
External Size(W*D*H) mm		500*550*1300	580*575*1810	620*575*1980	1220*630*1885	1220*860*1885
Capacity		130L	250L	310L	656L	1000L
Temp. Range		2℃~8℃				
Temp. Accuracy		0.1℃				
Control System		Microprocessor Control, Large Screen LED Display				
Alarm		Audible and visual alarm for: High and low temperature, Power failure alarm, Door ajar,Thermostat failure				
Refrigeration Type		Forced air refrigeration system				
Refrigerant		R600a, CFC Free			R134a, CFC Free	
Condenser & Evaporator		Bundy tube condenser				
Defrost		Auto defrost				
Construction	Structure	Unibody Design & Mono-assembly foaming (Rigid polyurethane insulation material)				
	Internal Material	Embossed aluminum sheet			Cold-rolled steel coated with anti-bacteria powder	
	External Material	Cold-rolled steel coated with anti-bacteria powder				
Shelves		4 pcs	4pcs	5 pcs	10 pcs	
Door		Glass door with electric heating				
Consumption		136W	170W	180W	560W	
Power Supply		AC220V±10%, 50/60Hz(only for BPR-5V160) ,AC110/220V±10%, 50/60Hz				
Standard Accessories		LED Lamp, shelves, door keys, USB port, probe access port(BPR-5V588 & BPR-5V1000)				
Optional Accessory		Temperature recorder, Temperature printer(USB port can not be selected at the same time),Remote alarm				
Package Size(W*D*H) mm		590*595*1380	670*650*1870	700*650*2030	1340*750*2100	1340*980*2100
Gross Weight		51kg	68kg	84kg	248kg	280kg