


MARK VIEW

**ANKARA
SERAMİK**
IPU 10/2000-12,5 M Y1
MADE IN TURKIYE

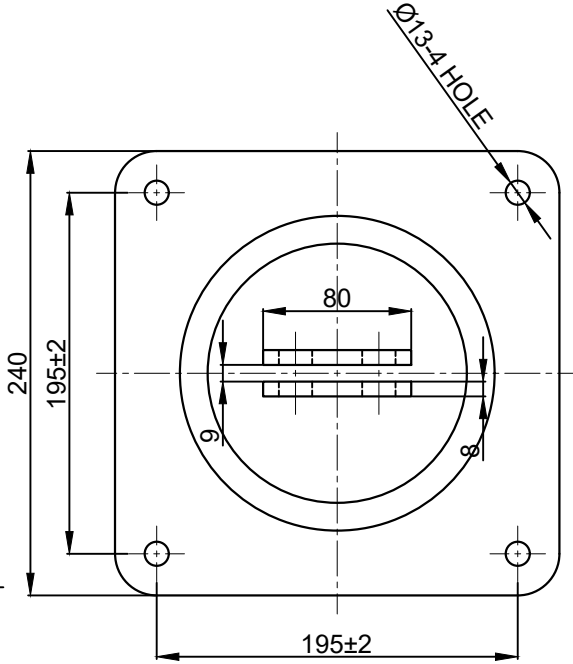

'X' Bakışı
View 'X'

ELEKTRİKSEL PERFORMANS
ELECTRICAL PERFORMANCE

Anma ve En Yüksek Çalışma Gerilimi (Nominal-Highest System Voltage)(Un-Um)	10-12 kV
Yaşta Şebeke Frek. Dayanım Gerilimi (Power Freq. Withstand Voltage, Wet)	42 kV
Yıldırım Darbe Dayanım Gerilimi (Lightning Impulse Withstand Voltage)	80 kV
Anma Akımı (Rated Current)	2000 A

MEKANİKSEL PERFORMANS
MECHANICAL PERFORMANCE

Eğilmede Minimum Kırılma Yüğü (Minimum Bending Failing Load)	12,5 kN
---	---------

DİELEKTRİK PARÇALAR
(DIELECTRIC PARTS)

Malzeme (Material) IEC 60672-3	Porselen (Porcelain)
Kaçak Mesafesi (Creepage Distance)	(Z-Z) min. 420 mm
Sır Rengi (Glaze Color)	Kahverengi (Brown)
Tolerans (General Tolerance)	GOST 13872-68
Ağırlık (Weight)	~22,7 kg

6	441000-946	Üst-Alt Conta (Top-Bottom Gasket)	2	Mantar Conta (Cork Gasket)
5	441000-945	Alt Bağlantı Metali (Bottom Metal)	1	Alüminyum (Aluminium)
4	441000-943	Orta Bağlantı Metali (Middle Metal)	1	Dökme Demir (Cast Iron) GGG 40 & C 1050 Sıcak Daldırma Galvaniz (Hot Dip Galvanized) 90-100 Mic.)
3	441000-944	Üst Bağlantı Metali (Top Metal)	1	Alüminyum (Aluminium)
2	441000-970	Orta Sac (Middle Sheet Metal)	2	Alüminyum (Aluminium)
1	9-441040-000	Seramik Gövde (Ceramic Body)	1	Porselen (Porcelain)
Poz. (Pos.)	Ürün No (Product No)	Bileşen Parçaları (Components Parts)	Adet (Pcs.)	Malzeme (Material)

ALL DIMENSIONS ARE IN mm UNLESS OTHERWISE STATED

THIS DRAWING IS NOT TO BE COPIED OR THE INFORMATION HEREIN DIVULGED TO ANY THIRD PARTY OR USED FOR THE MAKING OF APPARATUS WITHOUT THE WRITTEN PERMISSION OF ANKARA SERAMİK A.Ş.



PORSELEN SAN. ve TİC. A.Ş.
PORCELAIN INDUSTRY OF TURKEY
1.ORGANİZE SAN.BÖL.OSMANLI CAD.
NO:15 SİNCAN/ANKARA/TURKEY
TEL: (0312) 267 37 77 FAX: (0312) 267 27 77
info@ankaseramik.com

Yayın Tarihi
(Release Date)
Onay
(Approved By)
Kontrol
(Checked)
Çizen
(Drawn By)

07.11.2023

İ.ŞAHİN

Ü.ÇAMSARI

Ü.ÇAMSARI

Malzeme
(Material)

Std. No.

Rev. No

Porselen (Porcelain)

GOST 20454-85

Ürün no / Müşteri
(Product No / Customer)

9-441040-000

Adet
(Piece)

Ölçek
(Scale)

IPU 10/2000-12,5 M Y1
GEÇİŞ İZOLATÖRÜ
(Feedthrough Insulator)

