


N2 TYPE-30

Handheld Pulse Oximeter


- Portable Accurate Compact Comfortable
- Suitable for adults/pediatric patients with related accessories

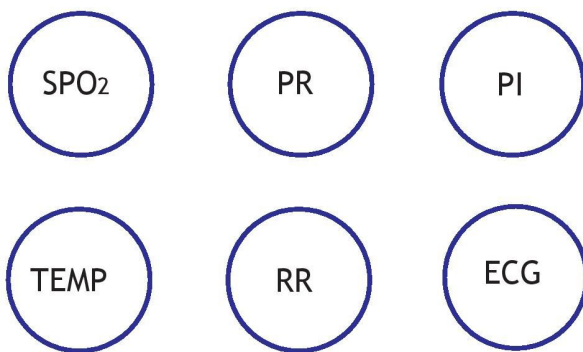

Product Features



Bluetooth connection data
transmission APP

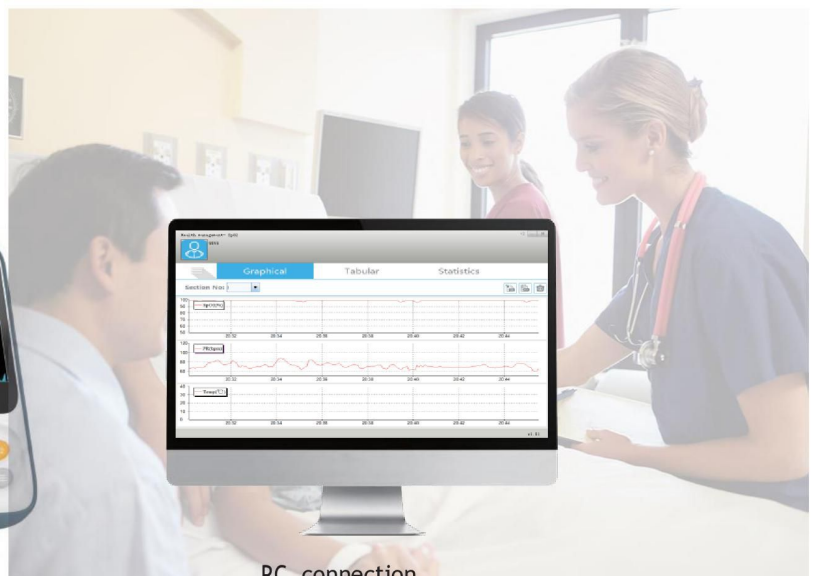

PC connection
and data management



Single-lead ECG



Touchable display



The base and bracket are optional.

Specifications

Configuration

Optional

SPO₂

- > Range 0-100%
- > Accuracy..... $\pm 2\%$ (70%-100%)
Undefined (0-69%)
- > Resolution 1%

PI

- > Range 0-20%
- > Accuracy Undefined
- > Resolution..... 0.001%

PR

- > Range 25-250bpm
- > Accuracy ± 2 bpm
- > Resolution..... 1bpm

RR

- > Range : 0-70rpm
- > Accuracy ± 1 rpm
- > Resolution 1rpm

Alarms (visual&acoustical)

- > System error, sensor near to end, connection sensor error etc.
- > High / Low / out of range parameter's value, low battery etc.

HR

- > Range 15-300bpm
- > Accuracy ± 2 bpm or $\pm 2\%$ (whichever is greater)
- > Resolution 1bpm

ECG

- > Range : mV-5.5mV
- > Resolution 2.36uV/LSB

TEMP

- > Range : 0-50°C
- > Accuracy $\pm 0.1^\circ\text{C}$
- > Resolution 0.1°C

Power

- > Rechargeable Battery: *9 hours (*for SpO₂ measuring mode only)
- > AC current 220 V / 50 Hz

Compliance

- > Standards : IEC / EN 60601-1
IEC 60601-2-25:2011
IEC 80601-2-61:2011

BMV Technology Co.,Ltd

Address: 4/F, Yinjin Building, Block 71, Baoan District, Shenzhen, China

Tel: +86 (0755) 85275443