

Cold Light Fountains

Components / Spare Parts

Catalog Page

TL 300 **Cold Light Fountain POWER LED 300 SCB**
400 A **Mains Cord**, length 300 cm

141



Components / Spare Parts

Catalog Page

20161401-1 **Cold Light Fountain Power LED 175 SCB**
400 A **Mains Cord**, length 300 cm
20090170 **SCB Connecting Cable**, length 100 cm

142



Spare Parts



2108191
Light Cable Adaptor,
HALOGEN, 150/250 W

Components / Spare Parts

Catalog Page

20161201 **Cold Light Fountain LED NOVA 150**
400 A **Mains Cord**, length 300 cm

90, 142



Components / Spare Parts

Catalog Page

20133101-1 **Cold Light Fountain XENON 300 SCB**
400 A **Mains Cord**, length 300 cm
20090170 **SCB Connecting Cable**, length 100 cm

143



Spare Parts



20133028
XENON Spare Lamp,
300 W, 15 V



20133027
XENON Spare Lamp
Module, 300 W, 15 V



2108191
Light Cable Adaptor,
HALOGEN, 150/250 W

Fiber Optic Light Cables

for Cold Light Fountains



Fiber Optic Light Cable with Straight Connector

- 495 NE **Fiber Optic Light Cable**, diameter 4.8 mm, length 300 cm
- 495 NCS **Fiber Optic Light Cable**, extremely heat-resistant, diameter 4.8 mm, length 250 cm
- NEW** 495 NCSC **Fiber Optic Light Cable**, extremely heat-resistant, with safety locking device, diameter 4.8 mm, length 250 cm
- 495 NB **Fiber Optic Light Cable**, diameter 4.8 mm, length 180 cm
- 495 ND **Fiber Optic Light Cable**, diameter 3.5 mm, length 300 cm
- 495 NA **Fiber Optic Light Cable**, diameter 3.5 mm, length 230 cm
- NEW** 495 NAC **Fiber Optic Light Cable**, with safety locking device, diameter 3.5 mm, length 230 cm
- 495 NL **Fiber Optic Light Cable**, diameter 3.5 mm, length 180 cm
- 495 NTA **Fiber Optic Light Cable**, diameter 2.5 mm, length 230 cm
- 495 NT **Fiber Optic Light Cable**, diameter 2.5 mm, length 180 cm
- NEW** 495 TIP **Fiber Optic Light Cable**, highly heat resistant, diameter 4.8 mm, length 300 cm, optimized for 3D TIPCAM^{®1} and TIPCAM[®]



Fiber Optic Light Cable with 90° Deflection to the Light Source

- 495 NWL **Fiber Optic Light Cable**, with 90° deflection to the cold light fountain on the fountain side, diameter 3.5 mm, length 300 cm
- 495 NWM **Fiber Optic Light Cable**, with 90° deflection to the cold light fountain on the fountain side, diameter 3.5 mm, length 230 cm
- 495 NW **Fiber Optic Light Cable**, with 90° deflection to the cold light fountain on the fountain side, diameter 3.5 mm, length 180 cm
- 495 NTX **Fiber Optic Light Cable**, with 90° deflection to the cold light fountain on the fountain side, diameter 2.5 mm, length 230 cm
- 495 NTW **Fiber Optic Light Cable**, with 90° deflection to the cold light fountain on the fountain side, diameter 2.5 mm, length 180 cm



495 NVC



495 NV/NVL/NVB

Fiber Optic Light Cable with 90° Deflection to the Instrument

- NEW** 495 NVC **Fiber Optic Light Cable**, with 90° deflection to the instrument, very narrow radius of curvature, diameter 4.8 mm, length 300 cm
- 495 NVB **Fiber Optic Light Cable**, with 90° deflection to the instrument, diameter 4.8 mm, length 300 cm
- 495 NVL **Fiber Optic Light Cable**, with 90° deflection to the instrument, diameter 3.5 mm, length 300 cm
- 495 NV **Fiber Optic Light Cable**, with 90° deflection to the instrument, diameter 3.5 mm, length 230 cm



Light Adaptor, angled 90°

- 495 EW **Light Adaptor**, angled 90°, diameter 4.8 mm, free rotatable, to connect with standard telescopes

Adaptor for connecting KARL STORZ fiber optic light cables with endoscopes and light sources from other manufacturers, see page TP 132

HEINKEL **Rectoscope Tube**, available in the following sizes:

| HEINKEL Rectoscope Tube with Obturator | | | | | |
|--|----------------|----------------|----------|----------------|----------------|
| Art. No. | Outer Diameter | Working Length | Art. No. | Outer Diameter | Working Length |
| 24918K | 12 mm | 20 cm | 24912K | 20 mm | 20 cm |
| 24916K | 16 mm | 20 cm | 24911K | 20 mm | 25 cm |
| 24914K | 16 mm | 30 cm | 24910K | 20 mm | 30 cm |
| 24915K | 18 mm | 25 cm | 24919K | 24 mm | 20 cm |
| 24913K | 18 mm | 30 cm | | | |

24920K **Illumination Head Unit**, for HEINKEL rectoscope tubes, with fiber optic light transmission, LUER-Lock hub for rubber insufflation bulb, including Glass Window Plug 24920FK

25215 **Sponge Forceps**, working length 40 cm

25239 **Suction Tube**, with cut-off hole, working length 40 cm

34351B **CLICKLINE Biopsy Forceps**, rotating, dismantling, insulated, with connector pin for unipolar coagulation, with LUER-Lock irrigation connector for cleaning, single action jaws, medium jaws, standard model for mucosal biopsy, size 5 mm, length 36 cm including:

Plastic Handle, without ratchet, with large contact area

Metal Outer Sheath, insulated

Forceps Insert

Components for video-assisted rectoscopy (RECTOVISION®)

24995K **Rectoscope Tube**, outer diameter 20 mm, length 25 cm, LUER-Lock hub for rubber insufflation bulb and obturator

24995GA **Working Attachment**, with locking ring for Rectoscope Tube 24995 and 2 channels for instruments with diameters up to 5 mm

24995BA **HOPKINS® Forward-Oblique Telescope 30°**, eyepiece angled 45°, diameter 4 mm, length 28.5 cm, for use with Rectoscope Tube 24995 and Working Attachment 24995GA



24920



Illumination Head,
for HEINKEL rectoscope tubes, with fiber optic light transmission, LUER-Lock hub for rubber insufflation bulb

Rectoscopes for Children and Adults

RECTOVISION®




24920

Illumination Head Unit, for HEINKEL rectoscope tubes, with fiber optic light transmission, LUER-Lock hub for rubber insufflation bulb, including Glass Window Plug 24920 FK

24931 N

Adjustable Magnifier, for Illumination Head Unit 24920, with sealing cap, for use with instruments size 10 mm, including Reducer 24931 B, for use with instruments size 5 mm

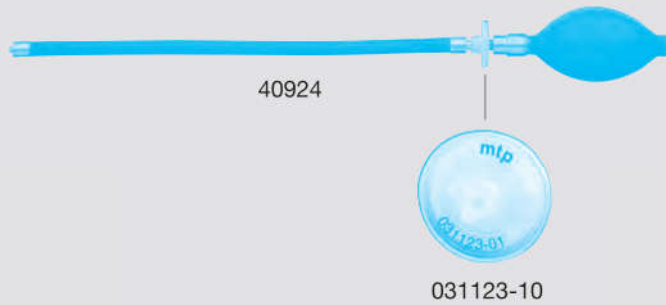

40924

Rubber Insufflation Bulb, with detachable tube, with LUER-Lock including:

- Rubber Bulb**
- Rubber Tube**

031123-10*


Gas Filter, for single use, sterile, package of 10

Note: The gas filter is positioned between the rubber bulb and the rubber tube to prevent instrument contamination. Reprocessing of the rubber bellows is nevertheless required when using Filter 031123-10.



Components/Spare Parts see chapter 14

25215

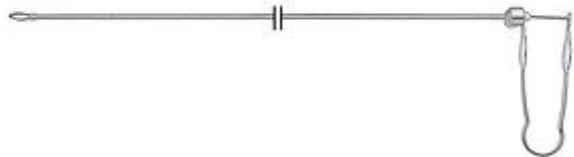

Sponge Forceps,
working length 40 cm

