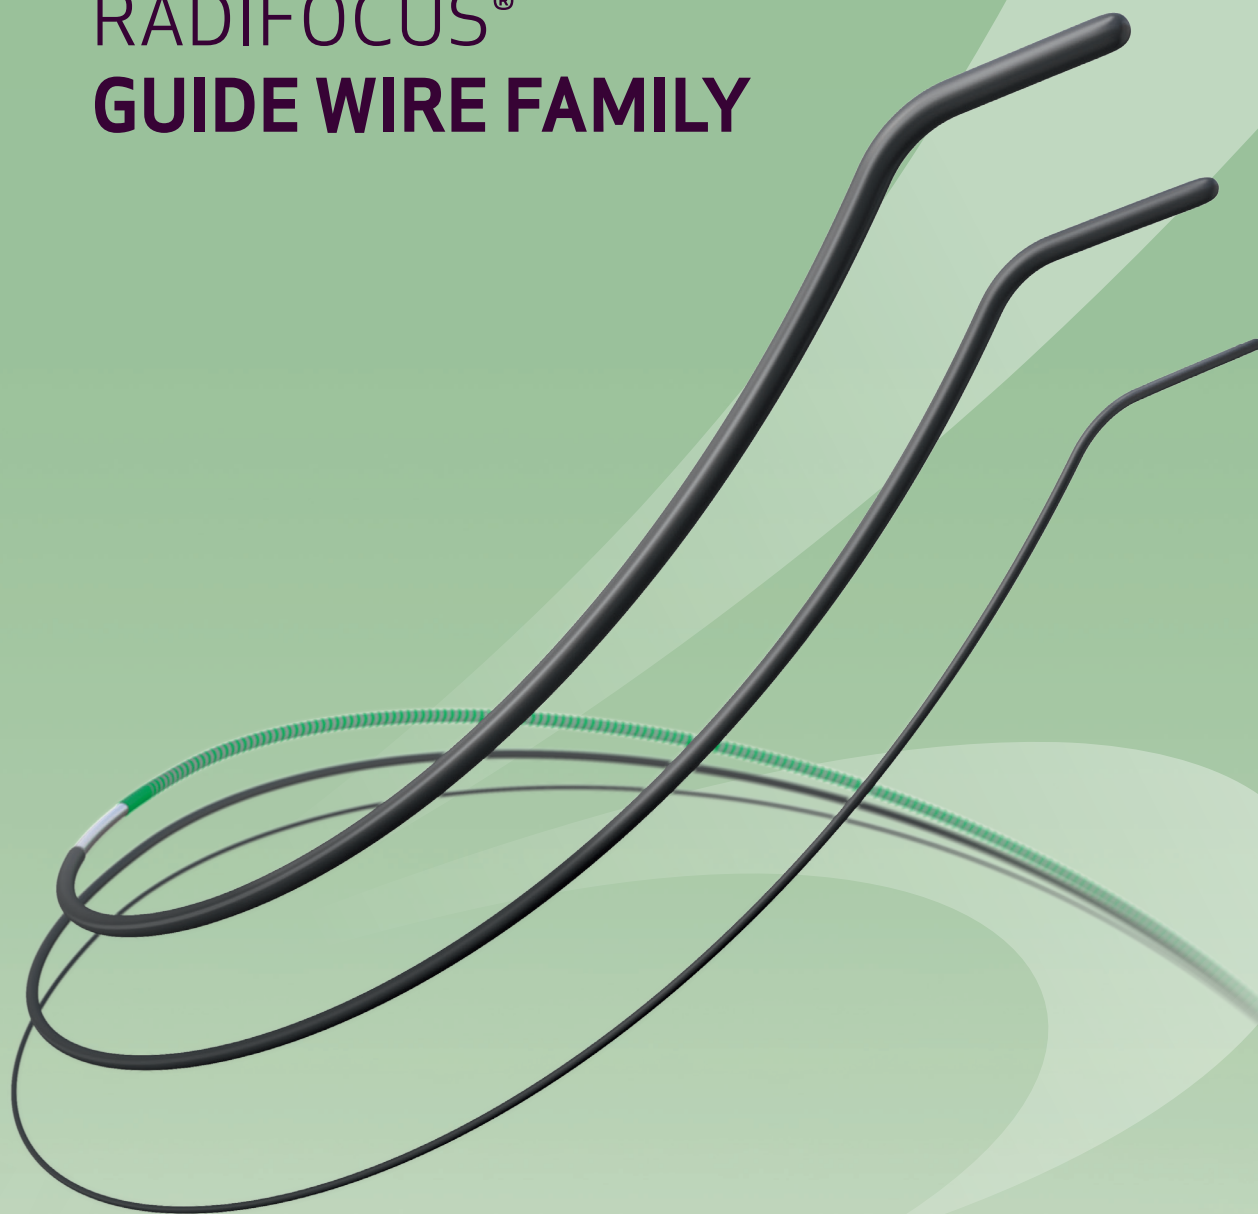


RADIFOCUS®  
**GUIDE WIRE FAMILY**






GLIDE WITH  
**CONFIDENCE**

# RADIFOCUS® Guide Wire M

J-Tip

- Nitinol guidewire covered with polyurethane containing tungsten and hydrophilic M Coat™
- Avoids the selection of side branches and minimizes the risk of procedural complications due to small J-shaped atraumatic tip<sup>1</sup>

## ORDERING INFORMATION



Product code	Wire type	Outer diameter	Overall length	Flexible tip length	Tip shape
RF*GR35183M	Standard	0.035" / 0.89 mm	180 cm	3 cm	1.5 mm J-tip 
RF*GR35263M	Standard	0.035" / 0.89 mm	260 cm	3 cm	
RF*HR35183M	Half stiff	0.035" / 0.89 mm	180 cm	3 cm	
RF*HR35303M	Half stiff	0.035" / 0.89 mm	300 cm	3 cm	2.0 mm J-Tip 
RF*HN35183M	Half stiff	0.035" / 0.89 mm	180 cm	3 cm	
RF*GB35153M	Standard	0.035" / 0.89 mm	150 cm	3 cm	3.0 mm J-Tip 

1. Barbeau G. et al. Radial Loop and Extreme Vessel Tortuosity in the Transradial Approach: Advantage of Hydrophilic-Coated Guidewires and Catheters. Catheterization and Cardiovascular Interventions 59:442-450 (2003).

# RADIFOCUS® Glidewire Advantage™

- M Coat™ hydrophilic coated polyurethane jacket at distal part provides trackability equal to Radifocus® Guide Wire M
- Extra stiff proximal shaft with spiral PTFE\* coating provides good device support and very smooth sliding characteristics<sup>1</sup>
- Dedicated to all peripheral intervention levels, from sheath placement to ilio-femoro-popliteal and below-the-knee treatments<sup>2</sup>

## ORDERING INFORMATION

Product code	Wire type	Outer diameter	Overall length	Distal hydrophilic coated length	Flexible tip length	Tip shape
RA*FA14181CM	Extra stiff	0.014" / 0.36 mm	180 cm	25 cm	1 cm	Angled 
RA*FA14301CM	Extra stiff	0.014" / 0.36 mm	300 cm	25 cm	1 cm	
RA*FA18181CM	Extra stiff	0.018" / 0.46 mm	180 cm	25 cm	1 cm	
RA*FA18301CM	Extra stiff	0.018" / 0.46 mm	300 cm	25 cm	1 cm	
RA*CA35185CM	Extra stiff	0.035" / 0.89 mm	180 cm	25 cm	5 cm	
RA*CA35265CM	Extra stiff	0.035" / 0.89 mm	260 cm	25 cm	5 cm	Straight 
RA*FS14301CM	Extra stiff	0.014" / 0.36 mm	300 cm	25 cm	1 cm	
RA*FS18301CM	Extra stiff	0.018" / 0.46 mm	300 cm	25 cm	1 cm	
RA*CS35185CM	Extra stiff	0.035" / 0.89 mm	180 cm	25 cm	5 cm	
RA*CS35265CM	Extra stiff	0.035" / 0.89 mm	260 cm	25 cm	5 cm	

\*PTFE: Polytetrafluoroethylene

1. Compared to Radifocus® Guide Wire M.



2. Lorenzoni et al. Guidewires for lower extremity artery angioplasty: a review. EuroIntervention. 2015;11:799-807.

# RADIFOCUS® Guide Wire M

Shapeable

- Nitinol guidewire covered with polyurethane containing tungsten and hydrophilic M Coat™
- Shapeable tip to access acute-angled vessels during peripheral, cerebral and coronary interventions

## ORDERING INFORMATION



Product code	Wire type	Outer diameter	Overall length	Flexible tip length	Tip shape
RE*GK35153M	Standard	0.035" / 0.89 mm	150 cm	3 cm	45° Angled 
RE*GK35183M	Standard	0.035" / 0.89 mm	180 cm	3 cm	
RE*GL35153M	Standard	0.035" / 0.89 mm	150 cm	3 cm	Straight 
RE*GL35183M	Standard	0.035" / 0.89 mm	180 cm	3 cm	

# RADIFOCUS® Guide Wire M

Radiopaque Tip Marker

- Nitinol guidewire covered with polyurethane containing tungsten and hydrophilic M Coat™ as well as distal gold tip marker
- Designed for improved visibility<sup>1</sup> when navigating microvessels in peripheral, cerebral and coronary vasculature

## ORDERING INFORMATION

Product code	Outer diameter	Overall length	Flexible tip length	Tip shape
RF*RA10188TM	0.011" / 0.28 mm	180 cm	8 cm	45° Angled 
RF*RA16188TM	0.016" / 0.41 mm	180 cm	8 cm	
RF*RA18188TM	0.018" / 0.46 mm	180 cm	8 cm	
RF*RB10188TM	0.011" / 0.28 mm	180 cm	8 cm	70° Angled 
RF*RB16188TM	0.016" / 0.41 mm	180 cm	8 cm	
RF*RB18188TM	0.018" / 0.46 mm	180 cm	8 cm	

1. Compared to Radifocus® Guide Wire M Standard.

# RADIFOCUS® Guide Wire GT

With Gold Coil

- Nitinol guidewire covered with polyurethane containing tungsten and hydrophilic M Coat™ as well as distal 2 cm gold coil
- Small diameters, long-tapered core and distal pre-shaped curves for superselective access of peripheral, coronary and cerebral vasculature

## ORDERING INFORMATION



Product code	Outer diameter	Overall length	Flexible tip length	Tip shape
RG*GA1218SM	0.012" / 0.30 mm	180 cm	25 cm	Angled 45° x 4 mm
RG*GE1218SM	0.012" / 0.30 mm	180 cm	25 cm	Angled 90° x 4 mm
RG*GJ1218SM	0.012" / 0.30 mm	180 cm	25 cm	Angled 1.5 mm J curve
RG*GW1218M	0.012" / 0.30 mm	180 cm	25 cm	Double angled 90° + 150°
RG*GA1220SM	0.012" / 0.30 mm	200 cm	25 cm	Angled 45° x 4 mm
RG*GE1220SM	0.012" / 0.30 mm	200 cm	25 cm	Angled 90° x 4 mm
RG*GJ1220SM	0.012" / 0.30 mm	200 cm	25 cm	Angled 1.5 mm J curve
RG*GW1220M	0.012" / 0.30 mm	200 cm	25 cm	Double angled 90° + 150°
RG*GA1418SM	0.014" / 0.036 mm	180 cm	25 cm	Angled 45° x 4 mm
RG*GE1418SM	0.014" / 0.036 mm	180 cm	25 cm	Angled 90° x 4 mm
RG*GW1418M	0.014" / 0.036 mm	180 cm	25 cm	Double Angled 90° + 150°
RG*GA1420SM	0.014" / 0.036 mm	200 cm	25 cm	Angled 45° x 4 mm
RG*GE1420SM	0.014" / 0.036 mm	200 cm	25 cm	Angled 90° x 4 mm
RG*GW1420M	0.014" / 0.036 mm	200 cm	25 cm	Double Angled 90° + 150°
RG*GA1618SM	0.016" / 0.41 mm	180 cm	25 cm	Angled 45° x 4 mm
RG*GA1618FM	0.016" / 0.41 mm	180 cm	35 cm	Angled 45° x 4 mm
RG*GE1618FM	0.016" / 0.41 mm	180 cm	35 cm	Angled 90° x 4 mm
RG*GW1618M	0.016" / 0.41 mm	180 cm	35 cm	Double angled 90° + 150°
RG*GV1618SM	0.016" / 0.41 mm	180 cm	25 cm	Double Angled 90° + 90°
RG*GA1620FM	0.016" / 0.41 mm	200 cm	35 cm	Angled 45° x 4 mm
RG*GE1620FM	0.016" / 0.41 mm	200 cm	35 cm	Angled 90° x 4 mm
RG*GW1620M	0.016" / 0.41 mm	200 cm	35 cm	Double angled 90° + 150°
RG*GJ1620FM	0.016" / 0.41 mm	200 cm	35 cm	Angled 1.5 mm J curve

# RADIFOCUS® Guide Wire M

Stiff

- Nitinol guidewire covered with polyurethane containing tungsten and hydrophilic M Coat™
- Stiffer shaft<sup>1</sup> designed for tight, stenotic, tortuous and narrow vessels

## ORDERING INFORMATION

Product code	Wire type	Outer diameter	Overall length	Flexible tip length	Tip shape
RF-PA18153M	Stiff	0.020"/0.51 mm	150 cm	3 cm	Angled 
RF-PA18263M	Stiff	0.020"/0.51 mm	260 cm	3 cm	
RF-PA25153M	Stiff	0.025"/0.64 mm	150 cm	3 cm	
RF-PA25183M	Stiff	0.025"/0.64 mm	180 cm	3 cm	
RF-PA25263M	Stiff	0.025"/0.64 mm	260 cm	3 cm	
RF-PA35083M	Stiff	0.035"/0.89 mm	80 cm	3 cm	
RF-PA35151M	Stiff	0.035"/0.89 mm	150 cm	1 cm	
RF*PA35153M	Stiff	0.035"/0.89 mm	150 cm	3 cm	
RF*PA35183M	Stiff	0.035"/0.89 mm	180 cm	3 cm	
RF*PA35188M	Stiff	0.035"/0.89 mm	180 cm	8 cm	
RF-PA35263M	Stiff	0.035"/0.89 mm	260 cm	3 cm	
RF-PA35303M	Stiff	0.035"/0.89 mm	300 cm	3 cm	
RF-PA38153M	Stiff	0.038"/0.97 mm	150 cm	3 cm	
RF-PA38183M	Stiff	0.038"/0.97 mm	180 cm	3 cm	
RF-PA38263M	Stiff	0.038"/0.97 mm	260 cm	3 cm	
RF-PS25153M	Stiff	0.025"/0.64 mm	150 cm	3 cm	Straight 
RF-PS25263M	Stiff	0.025"/0.64 mm	260 cm	3 cm	
RF-PS35083M	Stiff	0.035"/0.89 mm	80 cm	3 cm	
RF-PS35153M	Stiff	0.035"/0.89 mm	150 cm	3 cm	
RF-PS35183M	Stiff	0.035"/0.89 mm	180 cm	3 cm	
RF-PS35263M	Stiff	0.035"/0.89 mm	260 cm	3 cm	
RF-PS35453M	Stiff	0.035"/0.89 mm	450 cm	3 cm	
RF-PS38083M	Stiff	0.038"/0.97 mm	80 cm	3 cm	
RF-PS38153M	Stiff	0.038"/0.97 mm	150 cm	3 cm	
RF-PS38183M	Stiff	0.038"/0.97 mm	180 cm	3 cm	

1. Barbeau G. et al. Radial Loop and Extreme Vessel Tortuosity in the Transradial Approach: Advantage of Hydrophilic-Coated Guidewires and Catheters. Catheterization and Cardiovascular Interventions 59:442-450 (2003).



1. Compared to Radifocus® Guide Wire M Standard.


# RADIFOCUS® Guide Wire M

Standard

- Nitinol guidewire covered with polyurethane containing tungsten and hydrophilic M Coat™
- Designed to direct a catheter to the desired anatomical location during peripheral, coronary and cerebral interventions<sup>1</sup>

## ORDERING INFORMATION

Product code	Wire type	Outer diameter	Overall length	Flexible tip length	Tip shape
RF*GE35185M	Standard	0.035" / 0.89 mm	180 cm	5 cm	Bolia curve 
RF*GE35188M	Standard	0.035" / 0.89 mm	180 cm	8 cm	
RF-GA18053M	Standard	0.018" / 0.46 mm	50 cm	3 cm	Bolia curve 
RF-GA18153M	Standard	0.018" / 0.46 mm	150 cm	3 cm	
RF-GA18183M	Standard	0.018" / 0.46 mm	180 cm	3 cm	
RF-GA18223M	Standard	0.018" / 0.46 mm	220 cm	3 cm	
RF-GA18263M	Standard	0.018" / 0.46 mm	260 cm	3 cm	
RF-GA25053M	Standard	0.025" / 0.64 mm	50 cm	3 cm	
RF-GA25123M	Standard	0.025" / 0.64 mm	120 cm	3 cm	
RF-GA25153M	Standard	0.025" / 0.64 mm	150 cm	3 cm	
RF-GA25183M	Standard	0.025" / 0.64 mm	180 cm	3 cm	
RF-GA25263M	Standard	0.025" / 0.64 mm	260 cm	3 cm	
RF-GA32123M	Standard	0.032" / 0.81 mm	120 cm	3 cm	
RF-GA32153M	Standard	0.032" / 0.81 mm	150 cm	3 cm	
RF-GA32183M	Standard	0.032" / 0.81 mm	180 cm	3 cm	
RF-GA32263M	Standard	0.032" / 0.81 mm	260 cm	3 cm	
RF-GA35053M	Standard	0.035" / 0.89 mm	50 cm	3 cm	
RF-GA35083M	Standard	0.035" / 0.89 mm	80 cm	3 cm	
RF-GA35123M	Standard	0.035" / 0.89 mm	120 cm	3 cm	
RF-GA35151M	Standard	0.035" / 0.89 mm	150 cm	1 cm	
RF*GA35153M	Standard	0.035" / 0.89 mm	150 cm	3 cm	
RF-GA35155M	Standard	0.035" / 0.89 mm	150 cm	5 cm	
RF-GA35158M	Standard	0.035" / 0.89 mm	150 cm	8 cm	
RF-GA35181M	Standard	0.035" / 0.89 mm	180 cm	1 cm	
RF*GA35183M	Standard	0.035" / 0.89 mm	180 cm	3 cm	
RF-GA35223M	Standard	0.035" / 0.89 mm	220 cm	3 cm	
RF-GA35261M	Standard	0.035" / 0.89 mm	260 cm	1 cm	
RF*GA35263M	Standard	0.035" / 0.89 mm	260 cm	3 cm	
RF-GA35303M	Standard	0.035" / 0.89 mm	300 cm	3 cm	
RF-GA38151M	Standard	0.038" / 0.97 mm	150 cm	1 cm	
RF*GA38153M	Standard	0.038" / 0.97 mm	150 cm	3 cm	
RF-GA38183M	Standard	0.038" / 0.97 mm	180 cm	3 cm	
RF-GA38223M	Standard	0.038" / 0.97 mm	220 cm	3 cm	
RF-GA38263M	Standard	0.038" / 0.97 mm	260 cm	3 cm	

Product code	Wire type	Outer diameter	Overall length	Flexible tip length	Tip shape
RF-GS18153M	Standard	0.018" / 0.46 mm	150 cm	3 cm	Straight 
RF-GS18183M	Standard	0.018" / 0.46 mm	180 cm	3 cm	
RF-GS18263M	Standard	0.018" / 0.46 mm	260 cm	3 cm	
RF-GS25123M	Standard	0.025" / 0.64 mm	120 cm	3 cm	
RF-GS25153M	Standard	0.025" / 0.64 mm	150 cm	3 cm	
RF-GS25183M	Standard	0.025" / 0.64 mm	180 cm	3 cm	
RF-GS25263M	Standard	0.025" / 0.64 mm	260 cm	3 cm	
RF-GS32123M	Standard	0.032" / 0.81 mm	120 cm	3 cm	
RF-GS32153M	Standard	0.032" / 0.81 mm	150 cm	3 cm	
RF-GS32183M	Standard	0.032" / 0.81 mm	180 cm	3 cm	
RF-GS32263M	Standard	0.032" / 0.81 mm	260 cm	3 cm	
RF-GS35123M	Standard	0.035" / 0.89 mm	120 cm	3 cm	
RF-GS35151M	Standard	0.035" / 0.89 mm	150 cm	1 cm	
RF*GS35153M	Standard	0.035" / 0.89 mm	150 cm	3 cm	
RF-GS35155M	Standard	0.035" / 0.89 mm	150 cm	5 cm	
RF-GS35158M	Standard	0.035" / 0.89 mm	150 cm	8 cm	
RF-GS35181M	Standard	0.035" / 0.89 mm	180 cm	1 cm	
RF-GS35183M	Standard	0.035" / 0.89 mm	180 cm	3 cm	
RF-GS35223M	Standard	0.035" / 0.89 mm	220 cm	3 cm	
RF-GS35261M	Standard	0.035" / 0.89 mm	260 cm	1 cm	
RF-GS35263M	Standard	0.035" / 0.89 mm	260 cm	3 cm	
RF-GS38151M	Standard	0.038" / 0.97 mm	150 cm	1 cm	
RF-GS38153M	Standard	0.038" / 0.97 mm	150 cm	3 cm	
RF-GS38183M	Standard	0.038" / 0.97 mm	180 cm	3 cm	
RF-GS38263M	Standard	0.038" / 0.97 mm	260 cm	3 cm	





# Guide Wire M

Non-Vascular

- Nitinol guidewire covered with polyurethane containing tungsten and hydrophilic M Coat™
- For the placement or exchange of devices during non-vascular procedures in endourology and cannulation or insertion of devices into the bile ducts and pancreatic duct<sup>1</sup>

## ORDERING INFORMATION

Product code	Wire type	Outer diameter	Overall length	Flexible tip length	Tip shape
NV-GA18153M	Standard	0.018" / 0.46 mm	150 cm	3 cm	
NV-GA25153M	Standard	0.025" / 0.64 mm	150 cm	3 cm	
NV-GA32153M	Standard	0.032" / 0.81 mm	150 cm	3 cm	
NV-GA32263M	Standard	0.032" / 0.81 mm	260 cm	3 cm	
NV-GA32403M	Standard	0.032" / 0.81 mm	400 cm	3 cm	
NV-GA35083M	Standard	0.035" / 0.89 mm	80 cm	3 cm	
NV-GA35123M	Standard	0.035" / 0.89 mm	120 cm	3 cm	
NV-GA35153M	Standard	0.035" / 0.89 mm	150 cm	3 cm	
NV-GA35183M	Standard	0.035" / 0.89 mm	180 cm	3 cm	
NV-GA35263M	Standard	0.035" / 0.89 mm	260 cm	3 cm	
NV-GA35403M	Standard	0.035" / 0.89 mm	400 cm	3 cm	
NV-GA35453M	Standard	0.035" / 0.89 mm	450 cm	3 cm	
NV-GA38153M	Standard	0.038" / 0.97 mm	150 cm	3 cm	
NV-PA18153M	Stiff	0.020" / 0.51 mm	150 cm	3 cm	
NV-PA18453M	Stiff	0.020" / 0.51 mm	450 cm	3 cm	
NV-PA25153M	Stiff	0.025" / 0.64 mm	150 cm	3 cm	
NV-PA25453M	Stiff	0.025" / 0.64 mm	450 cm	3 cm	
NV-PA35153M	Stiff	0.035" / 0.89 mm	150 cm	3 cm	
NV-PA35183M	Stiff	0.035" / 0.89 mm	180 cm	3 cm	
NV-PA35263M	Stiff	0.035" / 0.89 mm	260 cm	3 cm	
NV-PA35403M	Stiff	0.035" / 0.89 mm	400 cm	3 cm	
NV-PA38153M	Stiff	0.038" / 0.97 mm	150 cm	3 cm	
NV-GS18153M	Standard	0.018" / 0.46 mm	150 cm	3 cm	
NV-GS25123M	Standard	0.025" / 0.64 mm	120 cm	3 cm	
NV-GS25153M	Standard	0.025" / 0.64 mm	150 cm	3 cm	
NV-GS32153M	Standard	0.032" / 0.81 mm	150 cm	3 cm	
NV-GS32263M	Standard	0.032" / 0.81 mm	260 cm	3 cm	
NV-GS32403M	Standard	0.032" / 0.81 mm	400 cm	3 cm	
NV-GS35123M	Standard	0.035" / 0.89 mm	120 cm	3 cm	
NV-GS35153M	Standard	0.035" / 0.89 mm	150 cm	3 cm	
NV-GS35183M	Standard	0.035" / 0.89 mm	180 cm	3 cm	
NV-GS35263M	Standard	0.035" / 0.89 mm	260 cm	3 cm	
NV-GS35403M	Standard	0.035" / 0.89 mm	400 cm	3 cm	
NV-GS35453M	Standard	0.035" / 0.89 mm	450 cm	3 cm	
NV-GS38153M	Standard	0.038" / 0.97 mm	150 cm	3 cm	
NV-PS18453M	Stiff	0.020" / 0.51 mm	450 cm	3 cm	
NV-PS25453M	Stiff	0.025" / 0.64 mm	450 cm	3 cm	
NV-PS35083M	Stiff	0.035" / 0.89 mm	80 cm	3 cm	
NV-PS35153M	Stiff	0.035" / 0.89 mm	150 cm	3 cm	
NV-PS35183M	Stiff	0.035" / 0.89 mm	180 cm	3 cm	
NV-PS35263M	Stiff	0.035" / 0.89 mm	260 cm	3 cm	
NV-PS35403M	Stiff	0.035" / 0.89 mm	400 cm	3 cm	
NV-PS38153M	Stiff	0.038" / 0.97 mm	150 cm	3 cm	
NV-PS38183M	Stiff	0.038" / 0.97 mm	180 cm	3 cm	