





AESCULAP / B. Braun

Kompatible Anschlüsse
compatible connections:
Acculan/Comfort
GA440, GA523, GA623,
GA633, GA640, GB125R,
GB129, GB431, GB432

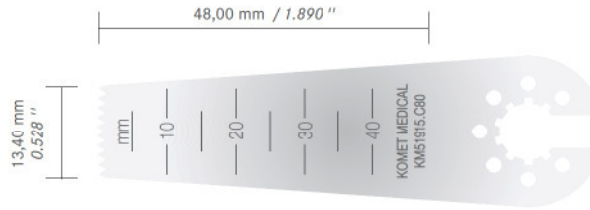


REF	KM51915.C80				
Materialdicke Material Thickness	0,40 mm 0.016 "	Schnittstärke Cutting Thickness	0,60 mm 0.024 "		

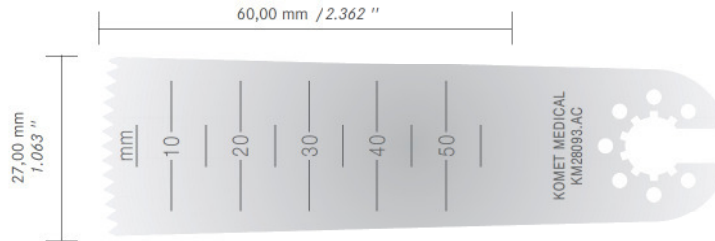

REF	KM28093.AC				
Materialdicke Material Thickness	0,60 mm 0.024 "	Schnittstärke Cutting Thickness	0,80 mm 0.031 "		

Kompatible Anschlüsse
compatible connections:
GB091, GB131R,
GA621R

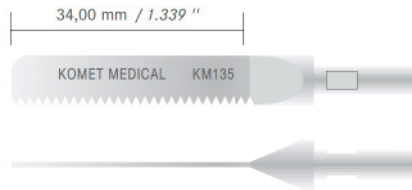


REF	KM135				
Materialdicke Material Thickness	0,60 mm 0.024 "	Schnittstärke Cutting Thickness	1,00 mm 0.047 "		

Kompatible Anschlüsse
compatible connections:
GD305, GD310




REF	PC320				
Materialdicke Material Thickness	0,30 mm 0.012 "	Schnittstärke Cutting Thickness	0,40 mm 0.016 "		

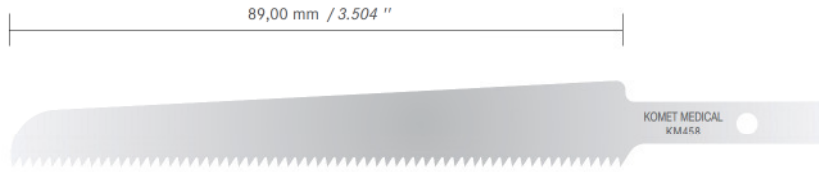


Kompatible Anschlüsse
compatible connections:
PowerPro Pneumatic
PRO6185, PowerPro
Electric II PRO6135,
PowerPro Max
PRO5400M, MPower 2
PRO6400M, reciprocating
saws.

REF	KM458	Schnittstärke	1,10 mm			
Materialdicke	0,60 mm	Cutting Thickness	0,043 "			
	0,024 "					

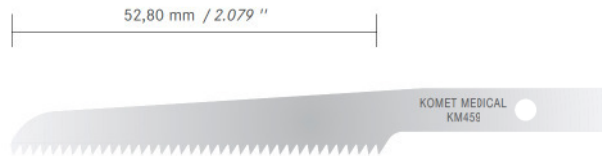


REF	KM459	Schnittstärke	1,09 mm			
Materialdicke	0,60 mm	Cutting Thickness	0,043 "			
	0,024 "					

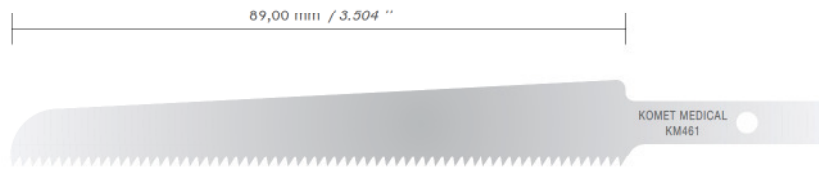

REF	KM461	Schnittstärke	1,70 mm			
Materialdicke	1,20 mm	Cutting Thickness	0,067 "			
	0,047 "					



REF	KM473	Schnittstärke	1,00 mm			
Materialdicke	0,60 mm	Cutting Thickness	0,039 "			
	0,024 "					

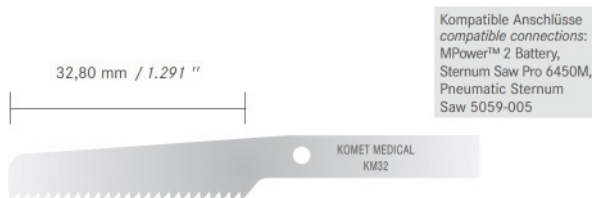

Kompatible Anschlüsse
compatible connections:
MPower™ 2 Battery,
Sternum Saw Pro 6450M,
Pneumatic Sternum
Saw 5059-005



Kompatible Anschlüsse
compatible connections:
Micro Power™ 6023-023,
Micro Choice 5020-023,
Micro 100 5023-010,
Micro E 5040-003
reciprocating saw


REF	KM32	Schnittstärke	1,05 mm	REF	KM060	Schnittstärke	0,60 mm
Materialdicke	0,60 mm	Cutting Thickness	0,041 "	Materialdicke	0,40 mm	Cutting Thickness	0,024 "
	0,024 "				0,016 "		

Alle Abbildungen in aktueller Größe (1:1)
All saw blades shown in actual size






Kompatible Anschlüsse
compatible connections:
CX 600, DPX 673

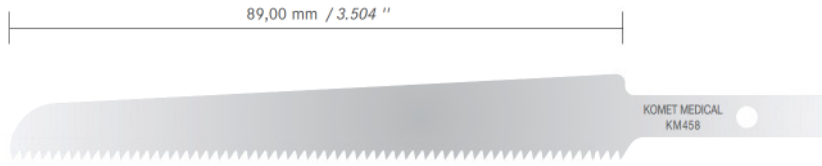

REF	KM458					
Materialdicke Material Thickness	0,60 mm 0.024 "	Schnittstärke Cutting Thickness	1,10 mm 0.043 "			



REF	KM459					
Materialdicke Material Thickness	0,60 mm 0.024 "	Schnittstärke Cutting Thickness	1,09 mm 0.043 "			



REF	KM461					
Materialdicke Material Thickness	1,20 mm 0.047 "	Schnittstärke Cutting Thickness	1,70 mm 0.067 "			



REF	KM473					
Materialdicke Material Thickness	0,60 mm 0.024 "	Schnittstärke Cutting Thickness	1,00 mm 0.039 "			




Alle Abbildungen in aktueller Größe (1:1)
All saw blades shown in actual size





Kompatible Anschlüsse
compatible connections:
Serie 7000/7402/
7507/7400/7700


MicroAire®

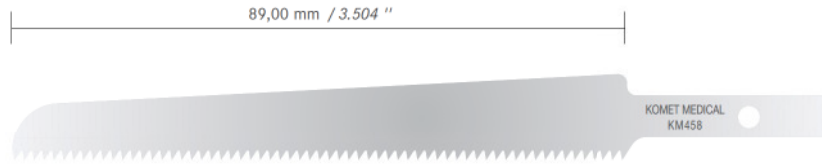

REF	KM458				
Materialdicke Material Thickness	0,60 mm 0.024 "	Schnittstärke Cutting Thickness	1,10 mm 0.043 "		




REF	KM459				
Materialdicke Material Thickness	0,60 mm 0.024 "	Schnittstärke Cutting Thickness	1,09 mm 0.043 "		



REF	KM461				
Materialdicke Material Thickness	1,20 mm 0.047 "	Schnittstärke Cutting Thickness	1,70 mm 0.067 "		




REF	KM473				
Materialdicke Material Thickness	0,60 mm 0.024 "	Schnittstärke Cutting Thickness	1,00 mm 0.039 "		




Alle Abbildungen in aktueller Größe (1:1)
All saw blades shown in actual size





Kompatible Anschlüsse
compatible connections:
4107, 298-97, 297-87,
296-87, 2107, 296-97,
6207, 7207

REF	KM97					
Materialdicke Material Thickness	0,80 mm 0.031 "	Schnittstärke Cutting Thickness	1,00 mm 0.039 "			




Kompatible Anschlüsse
compatible connections:
4206, 4106, 2106,
296-96, 6206, 7206,
reciprocating saw


REF	KM250R					
Materialdicke Material Thickness	0,60 mm 0.024 "	Schnittstärke Cutting Thickness	1,10 mm 0.039 "			



REF	KM275R					
Materialdicke Material Thickness	0,60 mm 0.024 "	Schnittstärke Cutting Thickness	1,00 mm 0.039 "			



REF	KM325R					
Materialdicke Material Thickness	0,80 mm 0.031 "	Schnittstärke Cutting Thickness	1,00 mm 0.039 "			



REF	KM277R					
Materialdicke Material Thickness	1,00 mm 0.039 "	Schnittstärke Cutting Thickness	1,20 mm 0.047 "			

Alle Abbildungen in aktueller Größe (1:1)
All saw blades shown in actual size



Kompatible Anschlüsse TPS 5100-37 Core 5400-37
 compatible connections: Command 2 2296-37/237 reciprocating saw



REF	KM5140.010		
Materialdicke Material Thickness	0,40 mm 0.016 "	Schnittstärke Cutting Thickness	0,40 mm 0.016 "



REF	KM5140.011		
Materialdicke Material Thickness	0,40 mm 0.016 "	Schnittstärke Cutting Thickness	0,40 mm 0.016 "



REF	KM5140.012		
Materialdicke Material Thickness	0,40 mm 0.016 "	Schnittstärke Cutting Thickness	0,40 mm 0.016 "



REF	KM5140.020		
Materialdicke Material Thickness	0,40 mm 0.016 "	Schnittstärke Cutting Thickness	0,60 mm 0.024 "



REF	KM5140.106		
Materialdicke Material Thickness	0,40 mm 0.016 "	Schnittstärke Cutting Thickness	0,40 mm 0.016 "



REF	KM5140.107		
Materialdicke Material Thickness	0,40 mm 0.016 "	Schnittstärke Cutting Thickness	0,40 mm 0.016 "




REF	KM5140.123		
Materialdicke Material Thickness	0,40 mm 0.016 "	Schnittstärke Cutting Thickness	0,40 mm 0.016 "



REF	KM5140.133		
Materialdicke Material Thickness	0,40 mm 0.016 "	Schnittstärke Cutting Thickness	0,40 mm 0.015 "



REF	KM5140.233		
Materialdicke Material Thickness	0,40 mm 0.016 "	Schnittstärke Cutting Thickness	0,40 mm 0.016 "



REF	KM5160.011		
Materialdicke Material Thickness	0,60 mm 0.024 "	Schnittstärke Cutting Thickness	1,00 mm 0.039 "

Alle Abbildungen in aktueller Größe (1:1)
 All saw blades shown in actual size





Stryker

Kompatible Anschlüsse compatible connections:	TPS 5100-37 Command 2 2296-37/237	Core 5400-37 reciprocating saw
--	--------------------------------------	-----------------------------------



REF	KM5160.012		
Materialdicke Material Thickness	0,60 mm 0.024 "	Schnittstärke Cutting Thickness	1,00 mm 0.039 "

REF	KM5160.123		
Materialdicke Material Thickness	0,60 mm 0.024 "	Schnittstärke Cutting Thickness	1,00 mm 0.039 "



REF	KM5160.233		
Materialdicke Material Thickness	0,60 mm 0.024 "	Schnittstärke Cutting Thickness	1,00 mm 0.039 "

--	--	--	--



--	--	--	--

--	--	--	--

--	--	--	--






Synthes

Kompatible Anschlüsse
compatible connections:
Colibri II 532-021




REF	PC532.066					
Materialdicke Material Thickness	0,40 mm 0.016 "	Schnittstärke Cutting Thickness	0,70 mm 0.028 "			

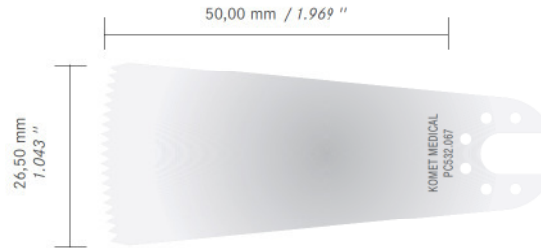

REF	PC532.067					
Materialdicke Material Thickness	0,40 mm 0.016 "	Schnittstärke Cutting Thickness	0,70 mm 0.028 "			

Kompatible Anschlüsse
compatible connections:
Compact Air Drive/
Power Drive 511.902,
Air Power Line
511.615, Battery Power
Line 530.615

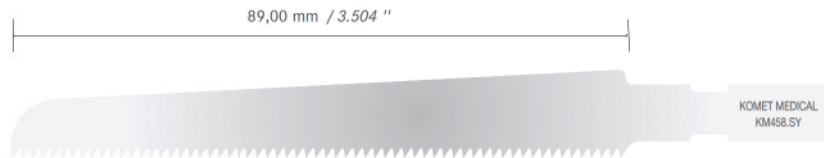

REF	KM458.SY					
Materialdicke Material Thickness	1,20 mm 0.047 "	Schnittstärke Cutting Thickness	1,40 mm 0.055 "			

